

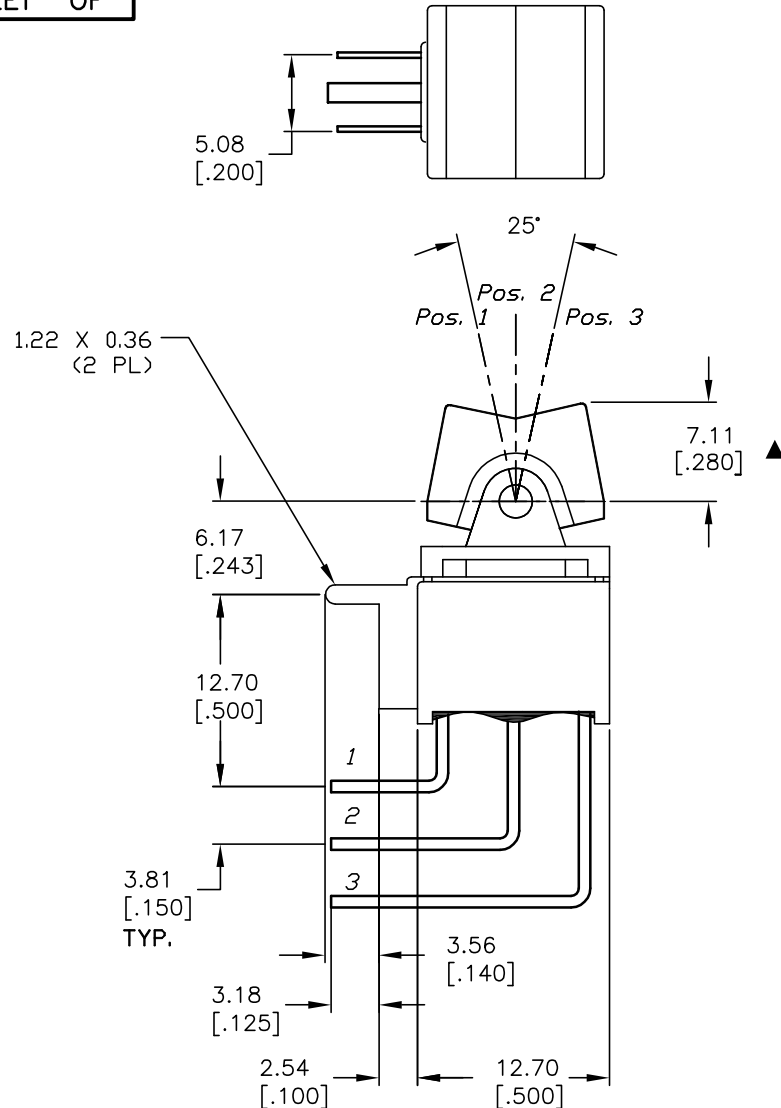


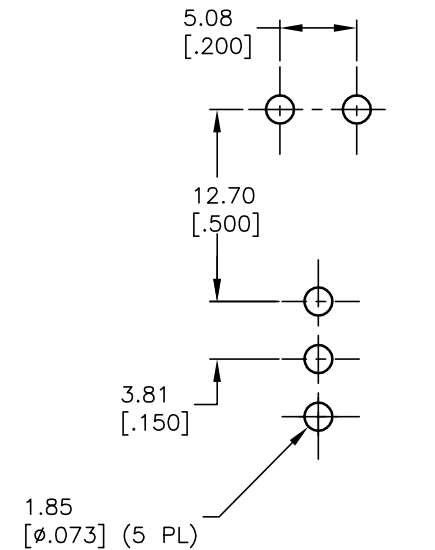


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- ▲ 3. MATERIAL: GOLD FLASH
4. RATINGS: 5A @120VAC or 28VDC, 2A @250VDC
5. ▲ DENOTES CRITICAL PARAMETER.

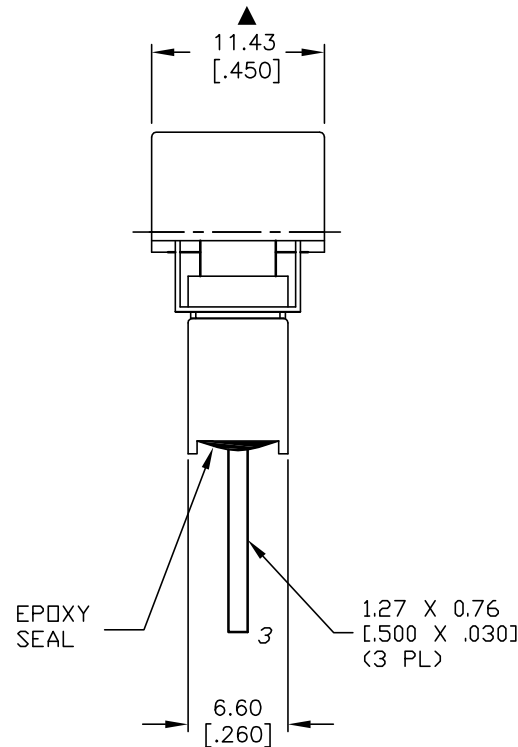

RECOMMEND P.C.B. LAYOUT



CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1

E-SWITCH®

TITLE

300AWSP3J5M7QE

SCALE

2:1

DATE

10/31/03

DR

AR

DWG

T301041

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

A	13567	RELEASED FOR PRODUCTION	10/31/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD