



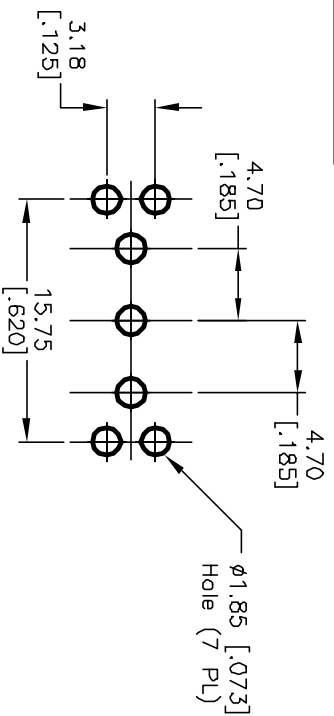

RECOMMENDED P.C.B. LAYOUT




CIRCUIT: SPDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
		
DN	NONE	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 5A @120V AC or 28VDC
2A @250V AC
5. FIXED TERMINAL/MOVING CONTACT:
COPPER ALLOY W/SILVER PLATING
6. ELECTRICAL LIFE: 30,000 make & break CYCLES
@FULL LOAD.
7. INSULATION RESISTANCE: 1000Ω-10MΩ @ 50% RH
8. DIELECTRIC STRENGTH: 1000V RMS @ SEA LEVEL
9. OPERATING TEMPERATURE: -30°C to +85°C
10. ROCKER MATERIAL: NYLON BLACK STD. (UL94HB)

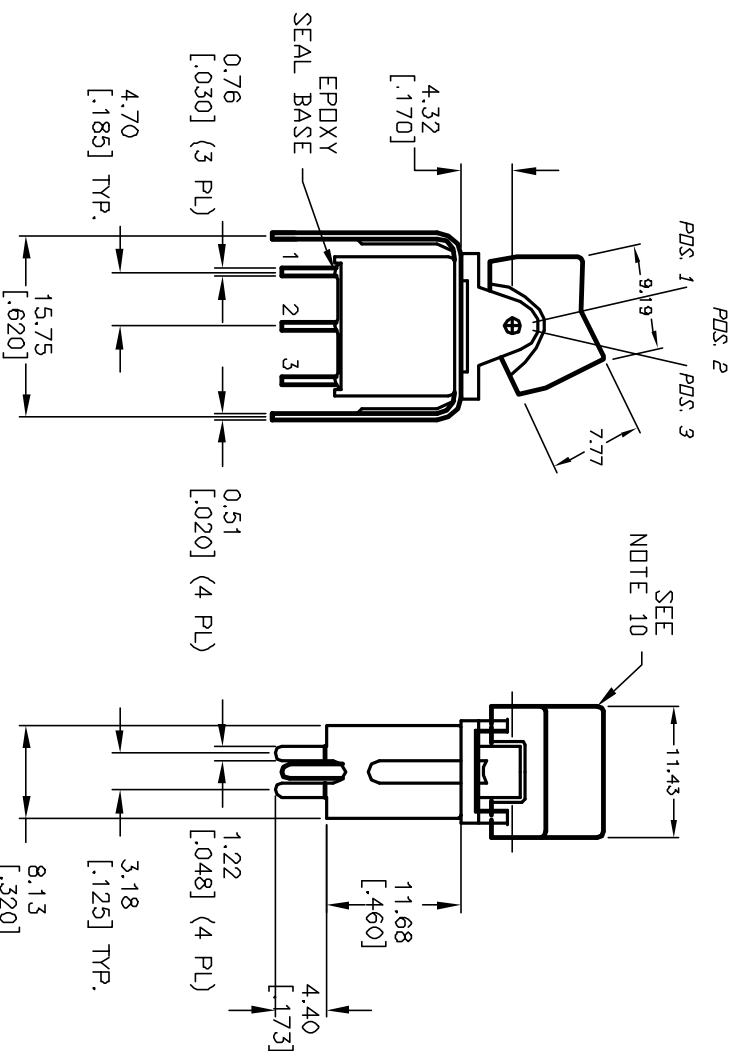

8. DIELECTRIC STRENGTH: 100V MINIMUM OVER VOLTAGE LEVEL 9. OPERATING TEMPERATURE: -30°C to +85°C 10. RODCKER MATERIAL: NYLON BLACK STD. (UL94HB)			
A	12834	RELEASED	2/25/03 CJB
REV.	ECN No.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			

E-SWITCH®			
TITLE			
300A WSP-1 J5 VS2 Q E			
SCALE	DATE	DR	DWG
2:1	2/25/03	CJB	T301050
			REV A