



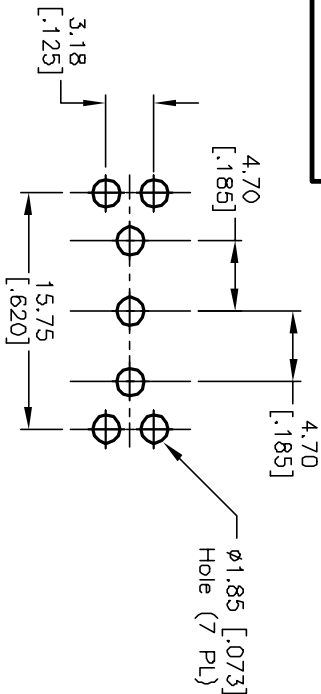

RECOMMENDED P.C.B. LAYOUT




CIRCUIT: SPDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	OFF	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 5A @120V AC or 28VDC
2A @250V AC
5. FIXED TERMINAL/MOVING CONTACT:
COPPER ALLOY W/SILVER PLATING
6. ELECTRICAL LIFE: 30,000 mcke & break CYCLES
@FULL LOAD.
7. INSULATION RESISTANCE: 1000MEGA-OHMS min.
8. DIELECTRIC STRENGTH: 1000V RMS@ SEA LEVEL
9. OPERATING TEMPERATURE: -30°C to +85°C
10. ROCKER MATERIAL: NYLON BLACK STD. (UL94HB)

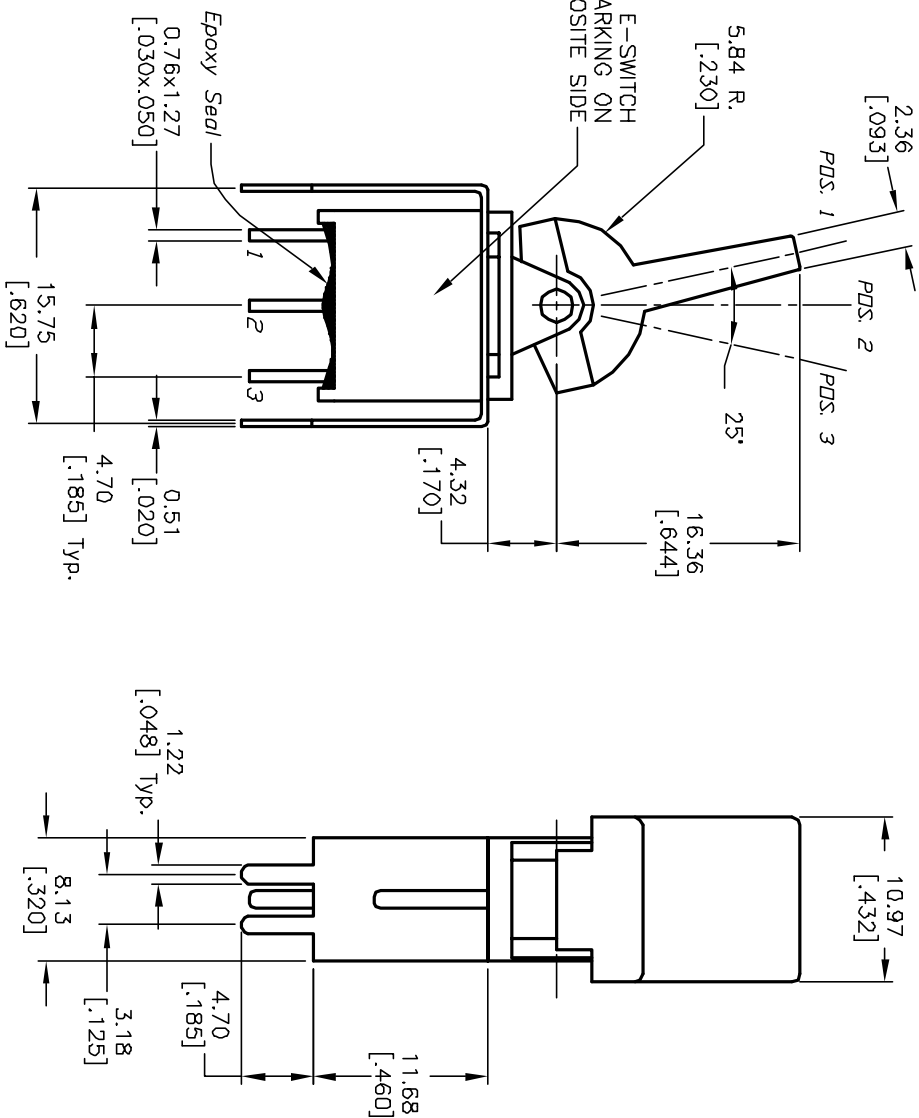

E-SWITCH®

REV.		TITLE		SCALE		DATE		DR		DWG		REV	
A	12836	RELEASED FOR PRODUCTION	2/25/03	--									
REV.		DESCRIPTION		DATE		CHKD							
		THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED											
		300A WSP-3 J6 VS2 Q E		2:1		2/25/03		--		T301302		A	