



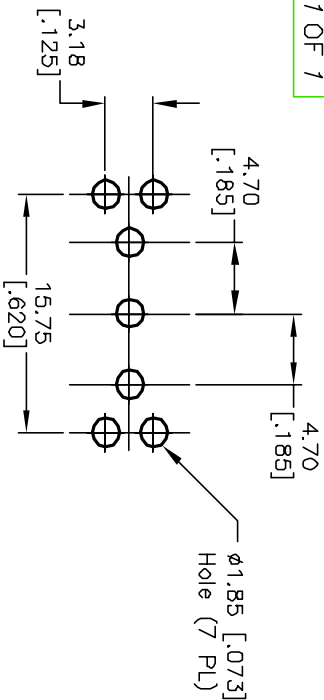

RECOMMENDED P.C.B. LAYOUT




CIRCUIT, SPDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	DNF	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.XX=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 0.4 VA MAX. @ 20V MAX. AC OR DC
5. FIXED TERMINAL/MOVING CONTACT:
COPPER ALLOY W/GOLD PLATING OVER
NICKLE PLATING
6. ELECTRICAL LIFE: 30,000 make & break cycles
@ FULL LOAD.
7. INSULATION RESISTANCE: 1000MEGA-OHMS min.
8. DIELECTRIC STRENGTH: 1000V RMS@ SEA LEVEL
9. OPERATING TEMPERATURE: -30°C to +85°C
10. ▲ DENOTES CRITICAL PARAMETER.

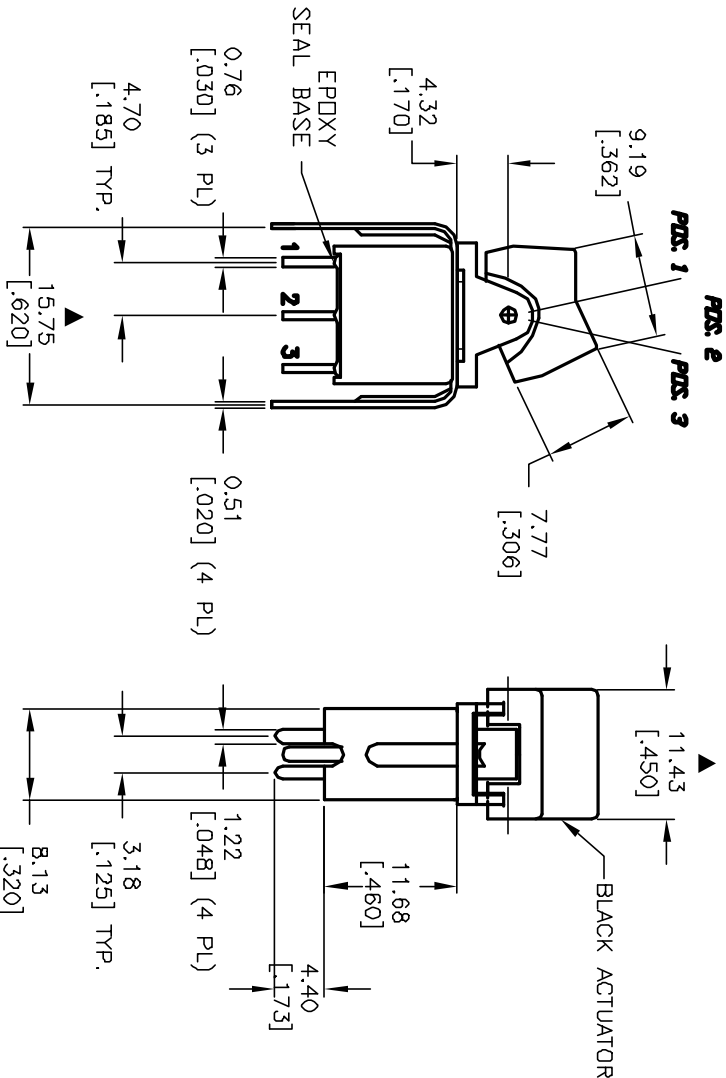

TITLE			
3004WSP3J5BLKVS2RE			
E-SWITCH®			
A	13190	RELEASED FOR PRODUCTION	6/6/03
REV.	ECN No.	DESCRIPTION	DATE
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED			
SCALE	DATE	DR	DWG
1.5:1	6/6/03	AR	T301353
REV			A