
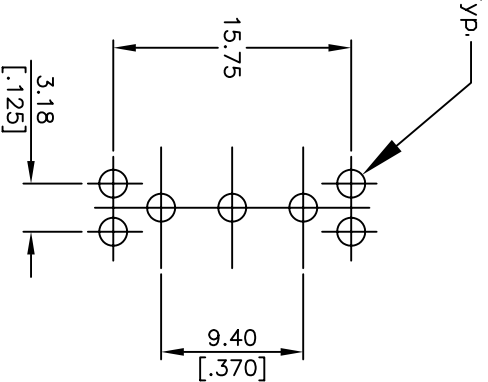


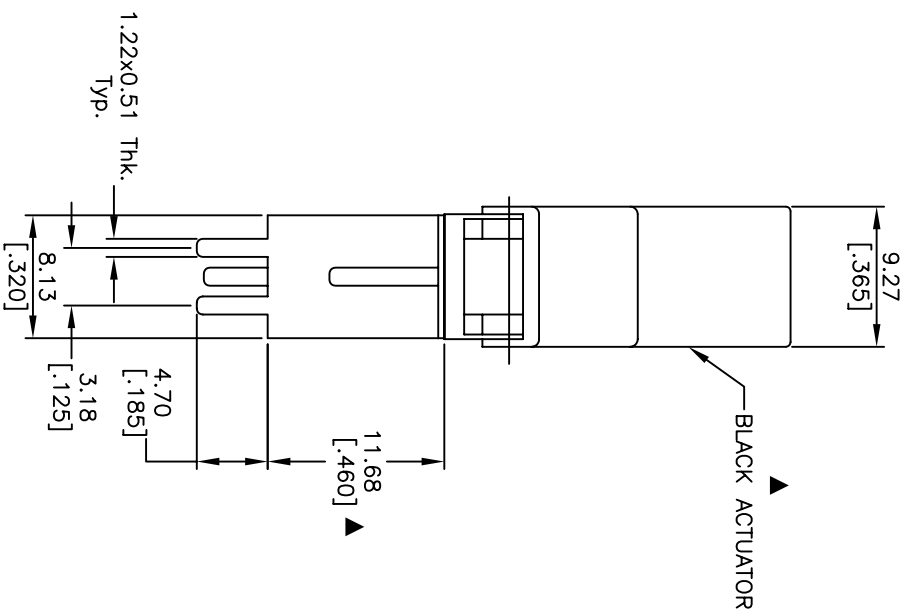

CONTACT CONFIGURATION

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
<ON>	OFF	<ON>
2-3	OPEN	2-1

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT MATERIAL: COPPER ALLOY WITH GOLD PLATE
OVER NICKEL PLATE.
5. RATING: 0.4VA MAX. @ 20V MAX. AC OR DC
6. OPERATING TEMPERATURE: -30° C TO 85° C
7. ▲ DENOTES CRITICAL PARAMETER.

7. ▲ DENOTES CRITICAL PARAMETER.			
C	15453	CHANGED FROM 3.81 TO 3.18 (TERM.)	10/25/05
B	15427	CHANGED FROM 3.81, 1.27 TYP	10/21/05
A	13216	RELEASED FOR PRODUCTION	6/13/05
REV.	ECN NO.	DESCRIPTION	DATE
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE		DATE	DR
2:1		6/13/05	AR
TITLE		DWG	
300AWS4J2BLKVS2RE		T301408	
REV		REV	
C		C	