
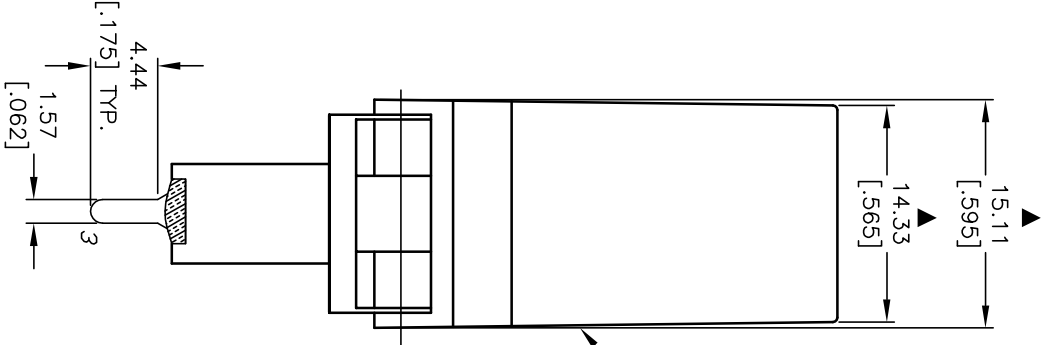
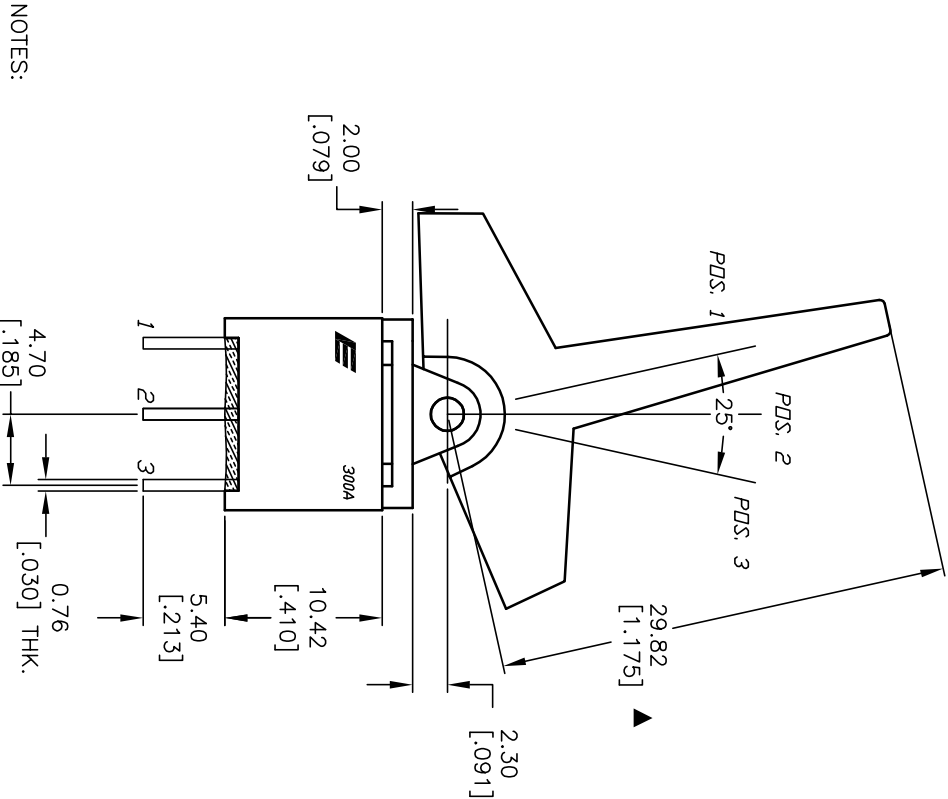


RECOMMEND P.C.B. LAYOUT



CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
<DN>	OFF	<DN>	
2-3	DPEN	2-1	

()=Momentary

- NOTES:
1. ALL DIMENSIONS IN MM TYP.
 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. CONTACT MATERIAL: COPPER ALLOY WITH SILVER PLATE
 5. RATING: 2 AMPS @250VAC
 6. 5 AMPS @120VAC OR 28VDC
 7. OPERATING TEMPERATURE: -30° C TO 85° C
 8. ▲ DENOTES CRITICAL DIMENSION.

TITLE			
300AWSP4J4BLKM3QE			
E-SWITCH®			
SCALE			
2:1		DATE	
9/15/04		DR	
AR		DWG	
T301410		REV	
A			