

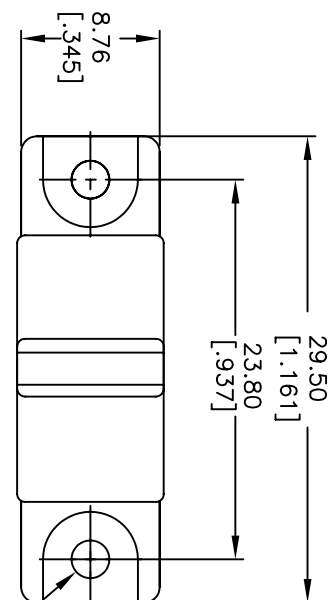


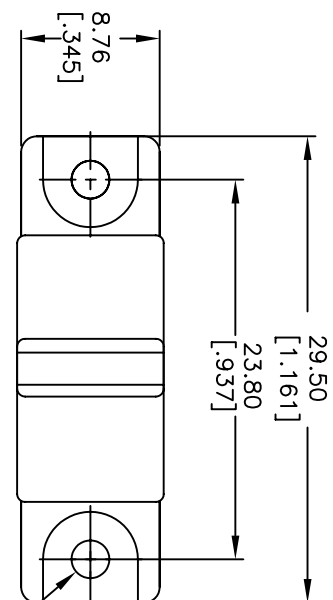

2.39
[ø.094]

VIEW A-A

RECOMMENDED PANEL MOUNT




CIRCUIT: SPST

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
<DN>	OFF	<DN>
2-3	OPEN	2-1

$\langle \rangle =$ Momentary

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V AC max
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Gold plate over
Nickel plate.
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100ma for AG & AU
7. ELECTRICAL LIFE: 30,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

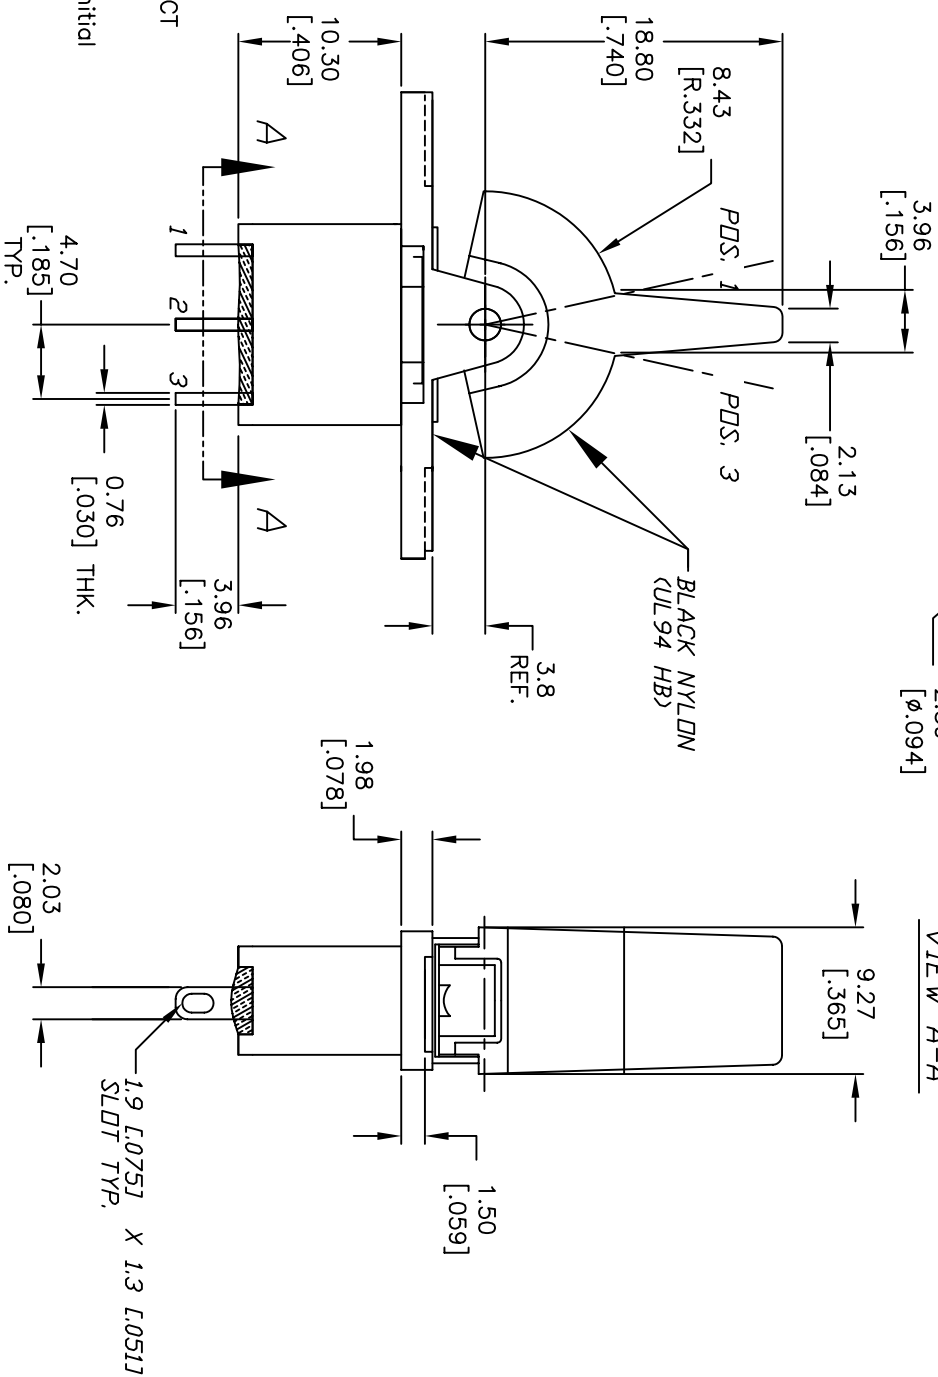

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					TITLE				
B	15159	CHANGED DIMENSION	8/9/05	PV	300A WSP4 R2 M1 R E				
A	12830	RELEASED FOR PRODUCTION	2/25/03	CB					
REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
					2:1	2/25/03	CB	T301415	B