


RECOMMENDED PANEL MOUNT




CIRCUIT: SPST

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
⟨DN⟩	DIFF	⟨DN⟩
2-3	OPEN	2-1

$\langle \rangle =$ Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5 AMPS W/RESISTANT LOAD @120VAC
2 AMPS W/RESISTANT LOAD @250VAC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
SILVER PLATED COPPER ALLOY
6. CONTACT RESISTANCE: 10milli Ohms max initial
@2-4VDC, 100ma for AG & AU
7. ELECTRICAL LIFE: 30,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.

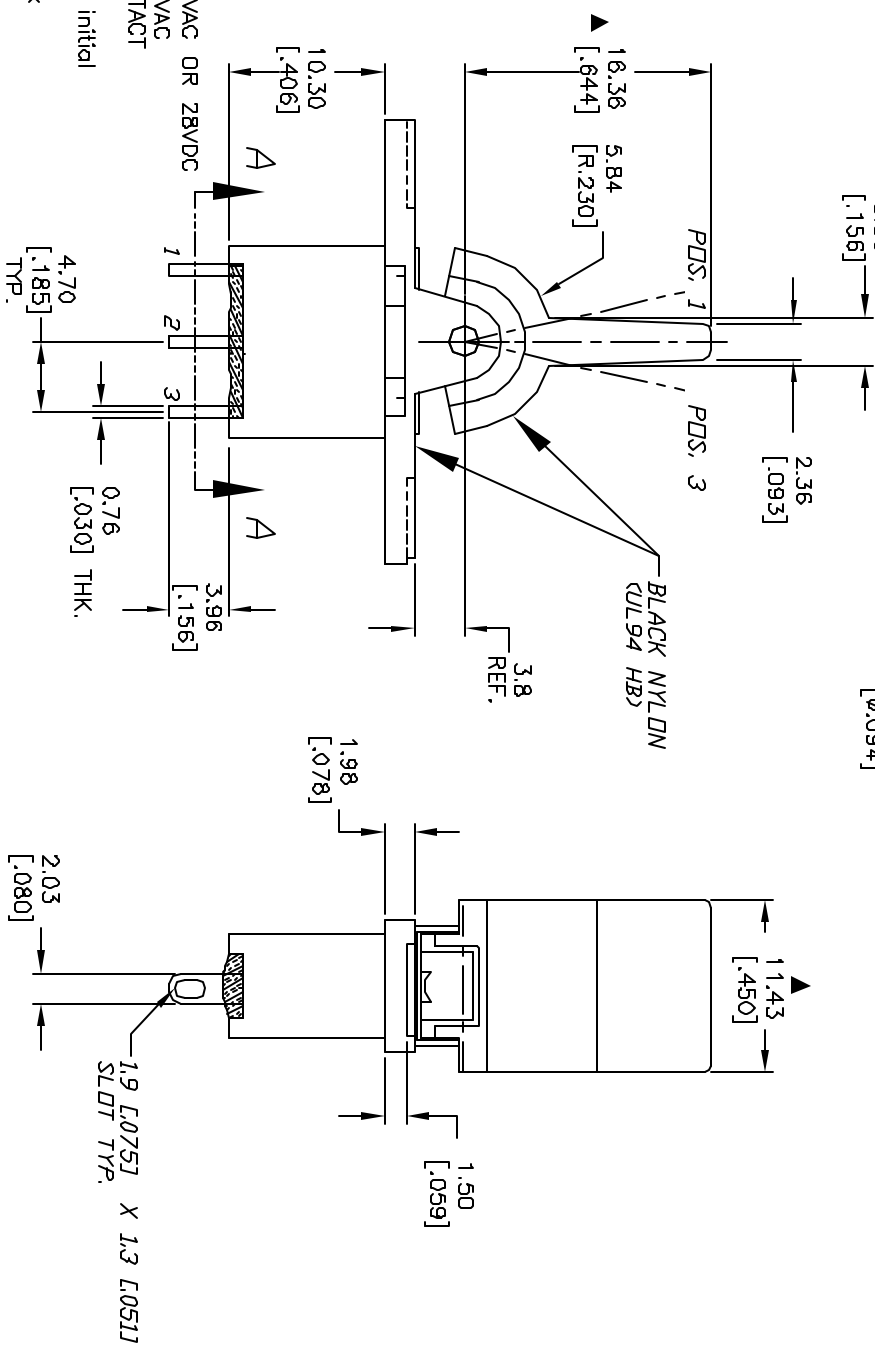

10. OPERATING TEMP.: -30°C to 85°C				
11. ▲ DENOTES CRITICAL PARAMETER.				
A	13301	RELEASED FOR PRODUCTION	7/18/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR REPRODUCED				
TITLE				
300AWSP4R16M1QE				
SCALE	DATE	DR	DWG	REV
2:1	7/18/03	AR	T301416	A