

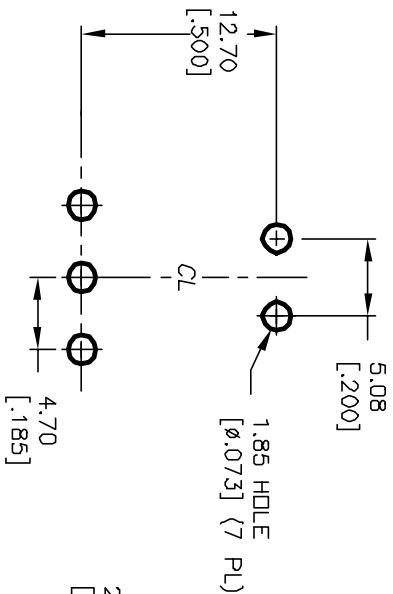




RECOMMENDED PCB LAYOUT

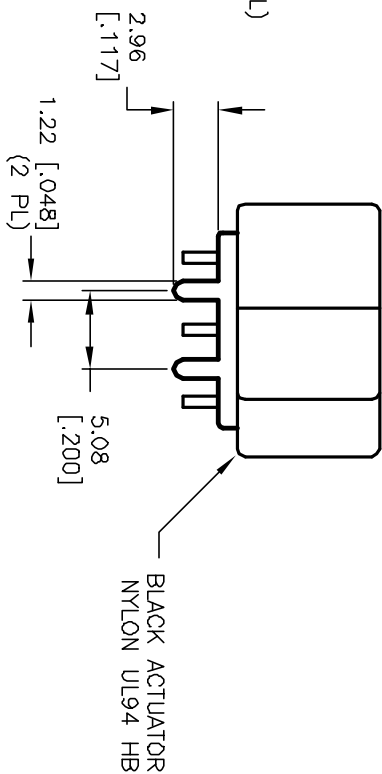


CIRCUIT: SPST

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
<DN>	DFF	<DN>	
2-3	OPEN	2-1	

()=Momentary

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FDR REF. ONLY
 4. RATING: 5A @120VAC OR 28VDC
2A @250VAC
 5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver Plate
 6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
 7. ELECTRICAL LIFE: 30,000 make-and-break
cycles at full load.
 8. INSULATION RESISTANCE: 1,000M ohm min.
 9. DIELECTRIC STRENGTH: 1000V RMS @sea level
 10. OPERATING TEMP.: -30°C to 85°C

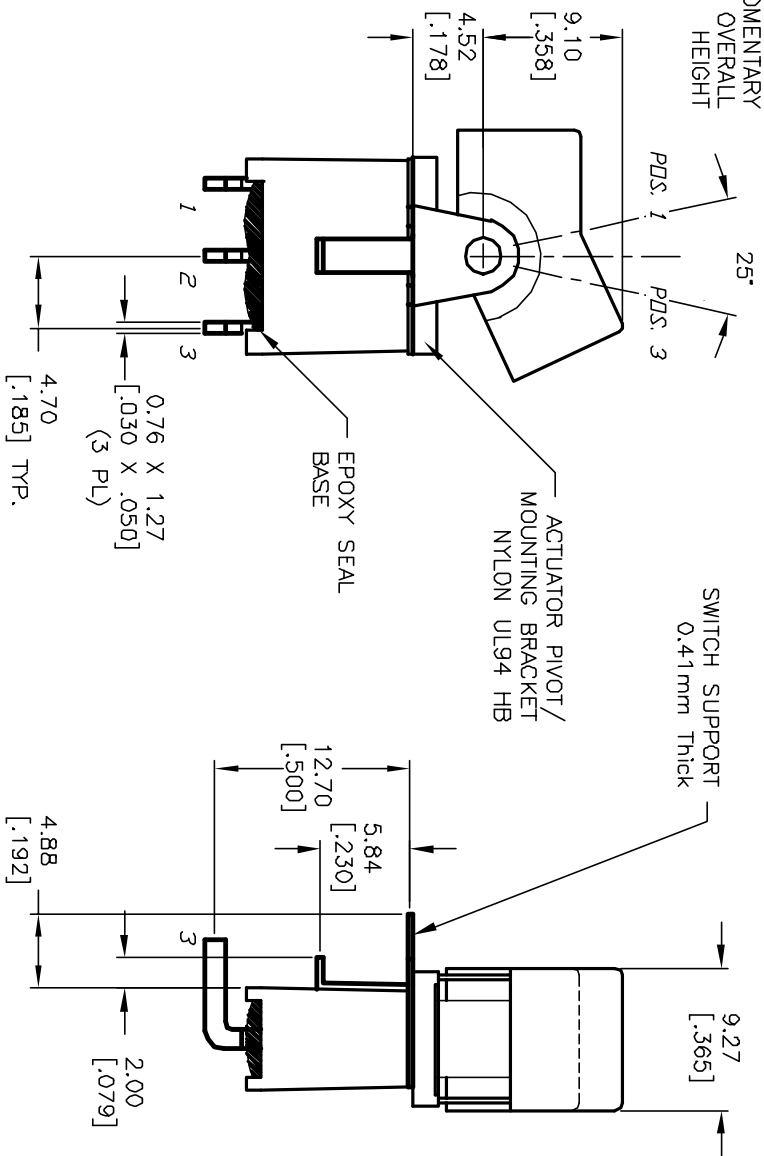

TITLE		3004 WSP-4 J1 BLK M6 Q E	
SCALE		2:1	
DATE		4/29/02	
DR		CB	
DWG		T301426	
REV		A	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®