



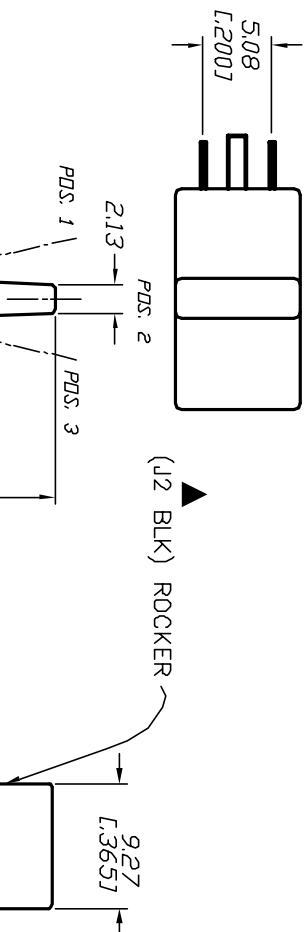

RECOMMENDED P.C.B. LAYOUT




CIRCUIT: SPDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
(DN)	DF F	(DN)
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V AC/DC max.
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT

6. CONTACT RESISTANCE: 10mILLI Ohms max initial @2-4VDC, 100ma for Ag & Au
7. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

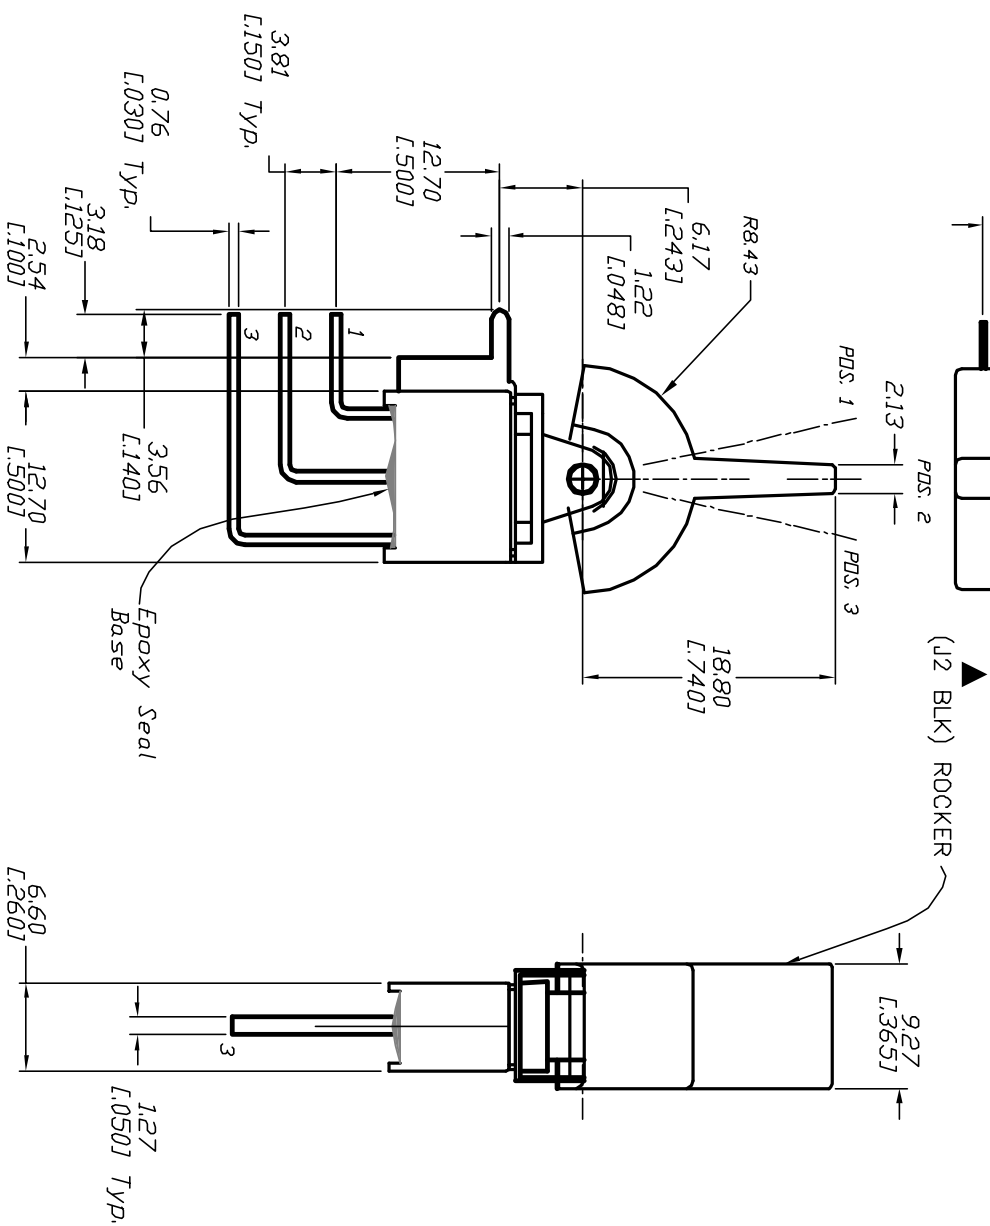

A		12864		RELEASED		2/28/03 CJB	
REV.		ECN No.		DESCRIPTION		DATE CHKD	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							

9. DIELECTRIC STRENGTH: 1000V RMS @sed level

10. OPERATING TEMP.: -30°C to 85°C

E-SWITCH® TITLE 300A WSP-4 J2 BLK M7 RE (GOLD CONTACTS) SCALE 2:1 DATE 2/28/03 DR CJB DWG T301427 REV A				
---	--	--	--	--