

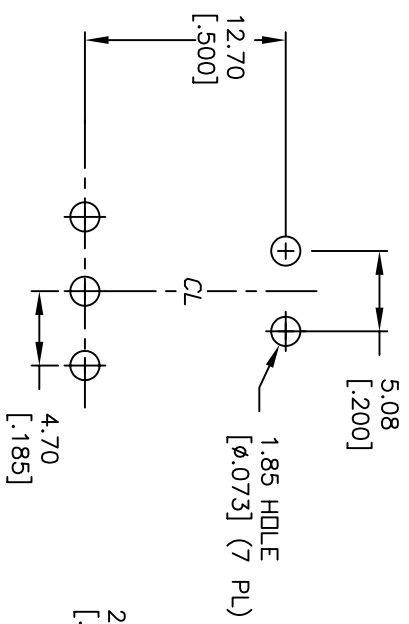




RECOMMENDED PCB LAYOUT

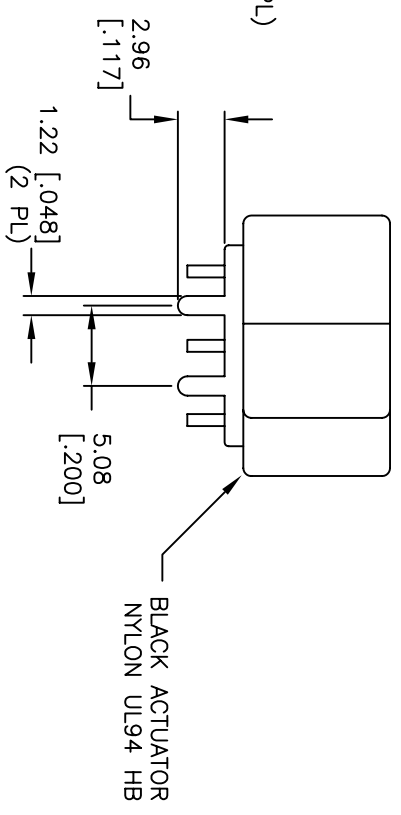


CIRCUIT: SPST

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
<DN>	DFF	<DN>	
2-3	OPEN	2-1	

NOTES: (<)=Momentary

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V AC or DC
- ▲5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/GOLD plate over
Nickel plate.
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 30,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C
11. 2002/95/EC (ROHS) COMPLIANT

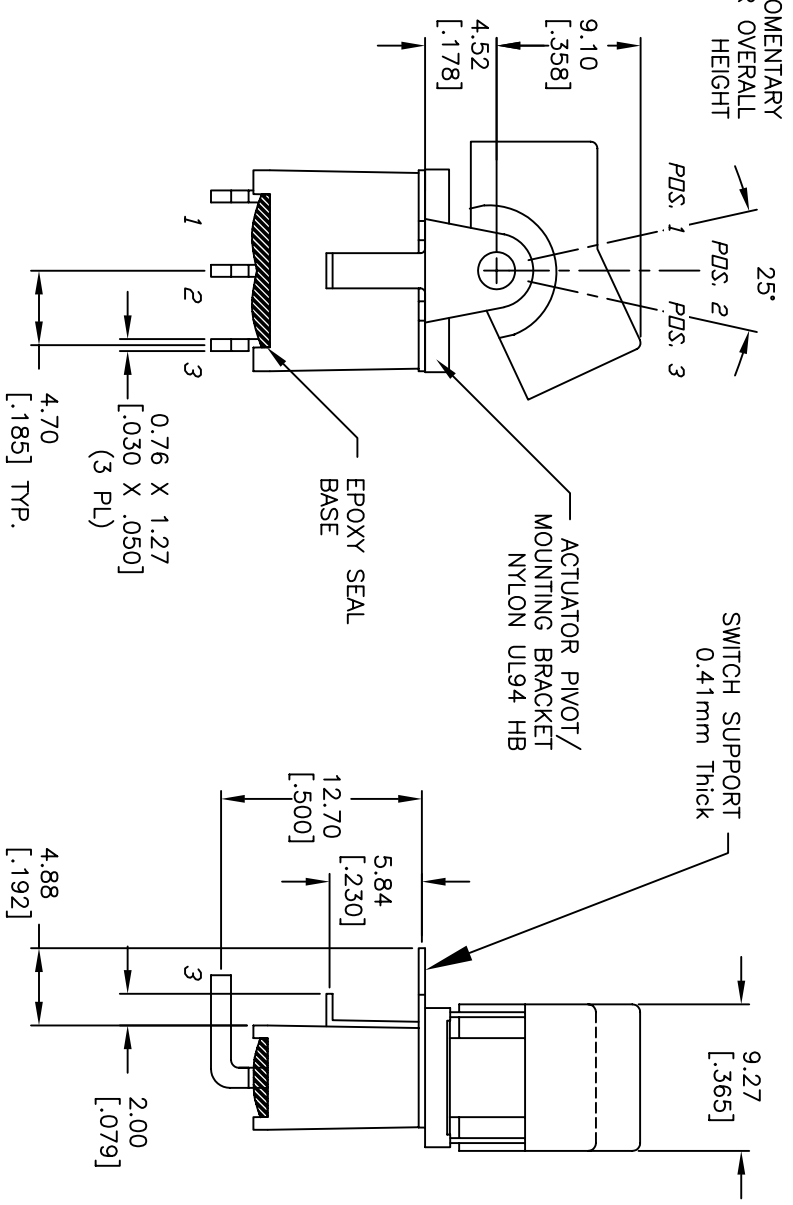

B		17407	FIXED TITLE		6/21/07	TN	TITLE		3004 WSP4J1M6RE		
A		12098	RELEASED FOR PRODUCTION								
REV.		ECN No.	DESCRIPTION		DATE	CHKD					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							SCALE	DATE	DR	DWG	REV
							2:1	6/21/07	TN	T301429	B