




SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
<DN>	DFF	<DN>
2-3	OPEN	2-1

<DN> = MOMENTARY



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC
2A @250VAC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver plate
6. CONTACT RESISTANCE: 10Milli-Ohms max. (initial)
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 30,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000Mega-OHM min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C
11. 2002/95/EC (ROHS) COMPLIANT

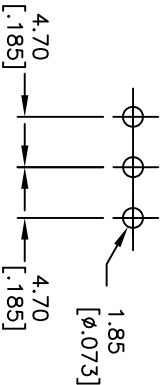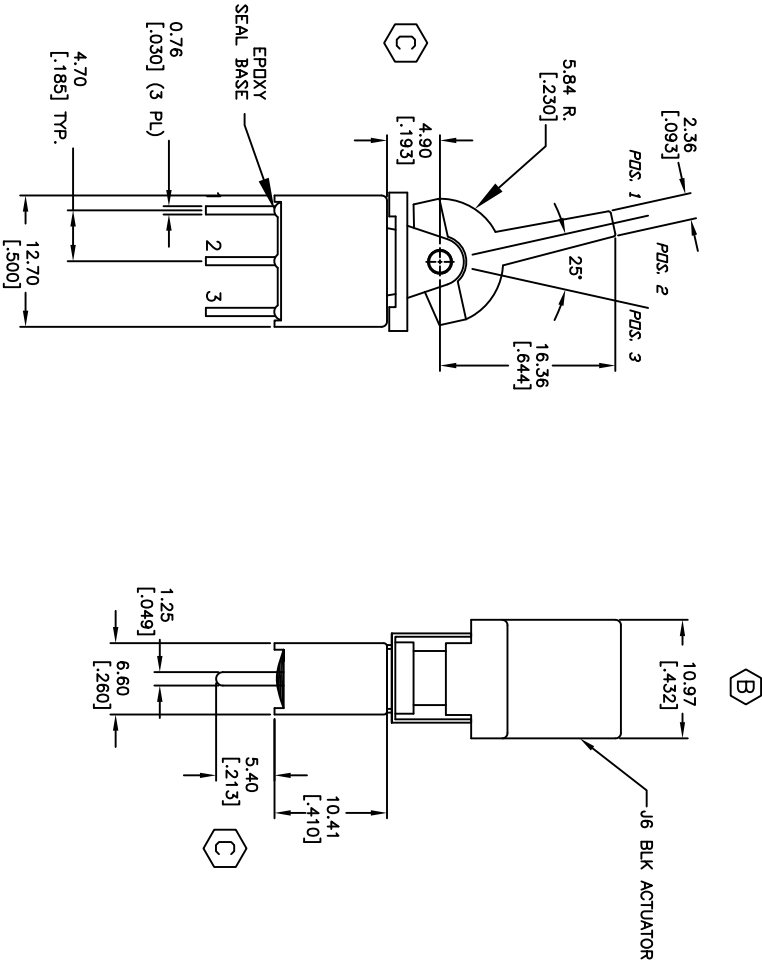

RECOMMENDED PCB LAYOUT
NOT TO SCALE

D	20947	ADD 'BLK' TO TITLE	1/02/13	EBP		TITLE 3004WSP4J6BLKM2QE
C	18665	CORRECT 2 DIMENSIONS	9/30/09	BLR		
B	13971	CORRECT ACTUATOR	4/29/04	AR		
A	13696	RELEASED FOR PRODUCTION	1/13/04	AR		
REV.	ECN NO.	DESCRIPTION	DATE	CHKD		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 9/30/09
					DR BLR	DWG T301462
					REV D	