




SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
<DN	OFF	<DN
2-3	OPEN	2-1

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X, X = \pm 0,4$
 $X, XX = \pm 0,25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0,4VA @20V AC/DC max.
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Gold plate over
Nickel plate.
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

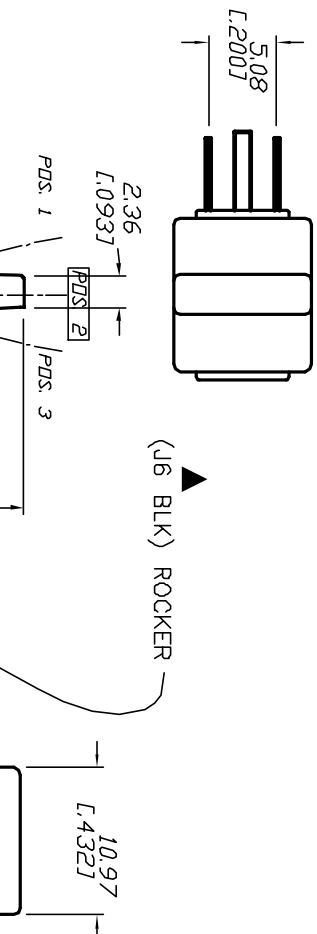

						TITLE
A	12865	RELEASED	2/28/03	CJB		300A WSP-4 J6 BLK M7 RE (GOLD CONTACTS)
REV.	ECN No.	DESCRIPTION	DATE	CHKD		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED						
			SCALE	DATE	DR	DWG
			2:1	2/28/03	CJB	T301467
						REV A