



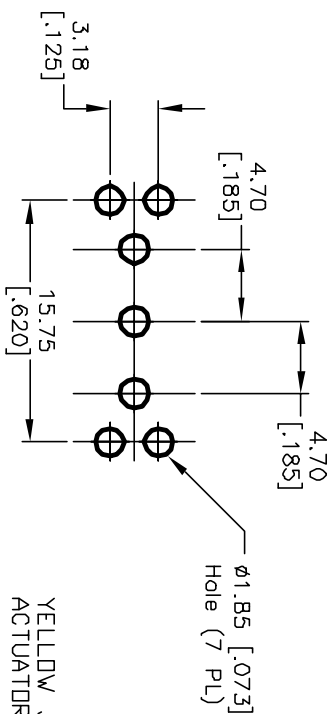

RECOMMENDED P.C.B. LAYOUT




CIRCUIT: SPDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
		
(ON)	OFF	(ON)
2-3	OPEN	2-1

$\langle \rangle =$ Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 0.4VA max. @20V max. (AC or DC)

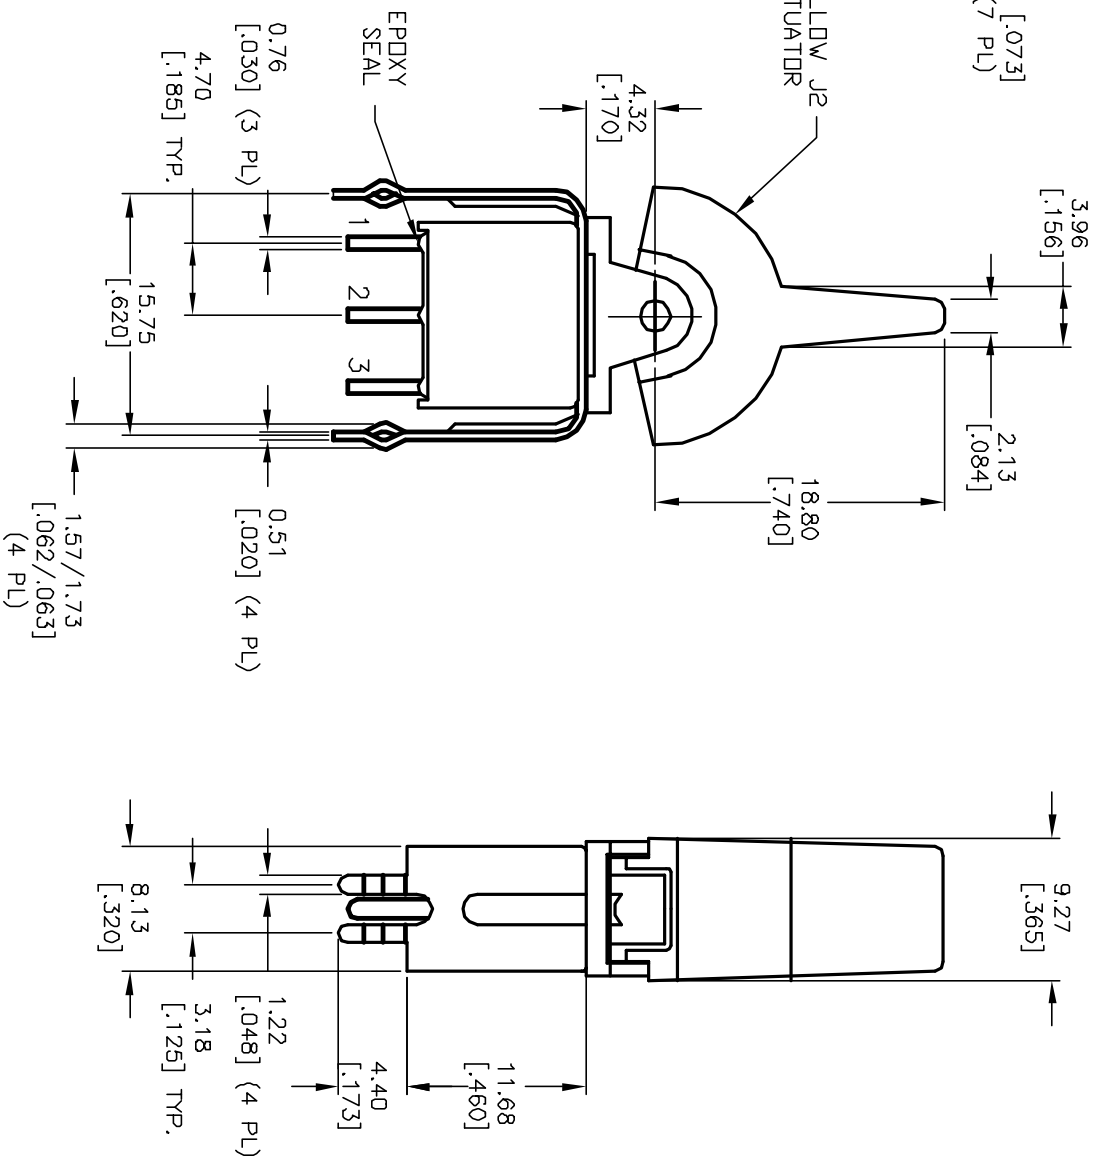

3. TERM. NOS. FOR REFERENCE ONLY.				
4. RATING: 0.4VA max. @20V max. (AC or DC)				
A	11571	RELEASED FOR PRODUCTION	7/16/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

E-SWITCH® TITLE 300A WSP-4 J2 (YEL) VS21 R E				
SCALE	DATE	DR	DWG	REV
2:1	7/16/01	CJB	T301497	A