



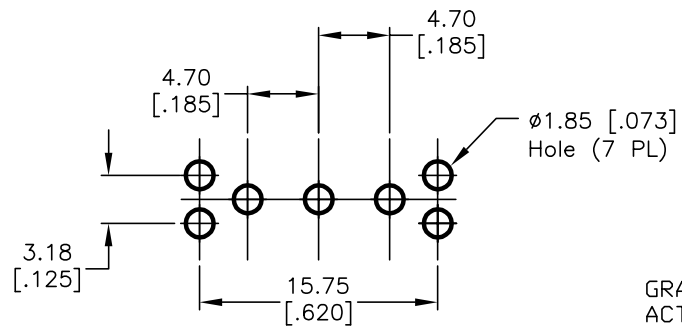

RECOMMENDED P.C.B. LAYOUT





CIRCUIT: SPDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3	OPEN	2-1

() = Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 0.4VA MAX. @20V MAX. (AC or DC)
5. PLATING GOLD PLATED COPPER ALLOY
6. OPERATING TEMP: -30°C TO +85°C
7. MECHANICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES
8. ▲ DENOTES CRITICAL PARAMETER.

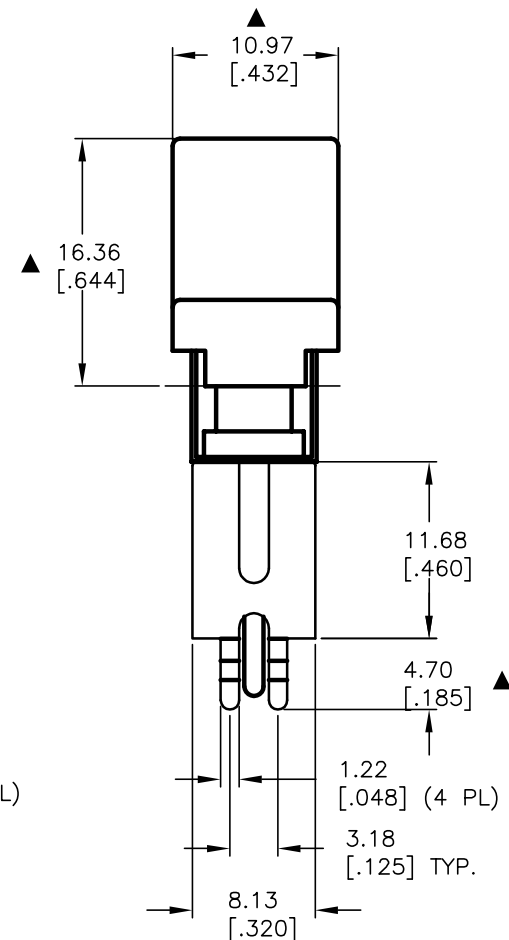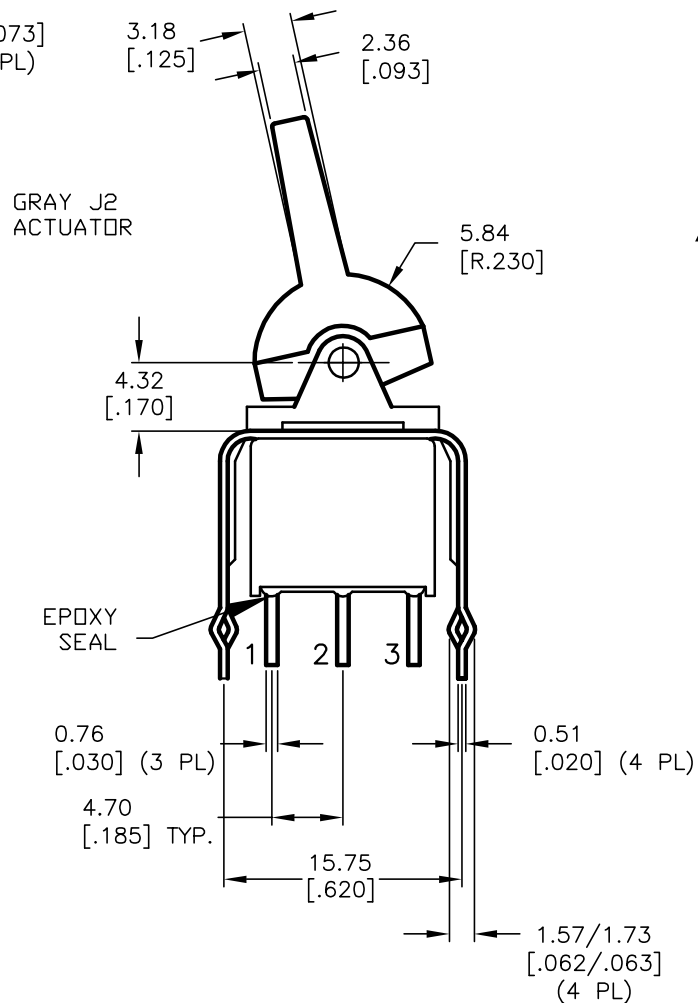

E-SWITCH®

TITLE

300AWSP2J6BLKVS21RE

SCALE

2:1

DATE

11/5/04

DR

AR

DWG

T301498

REV

A

A	14461	RELEASED FOR PRODUCTION	11/5/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED