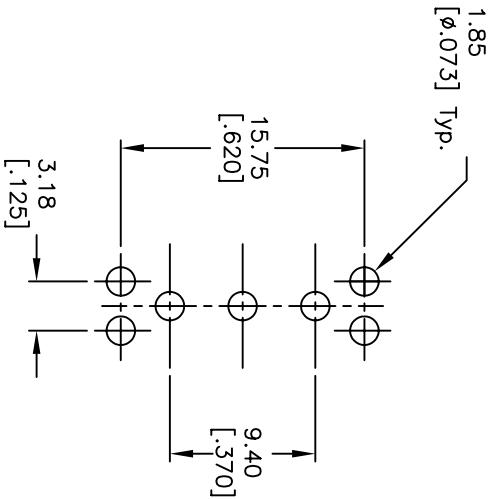
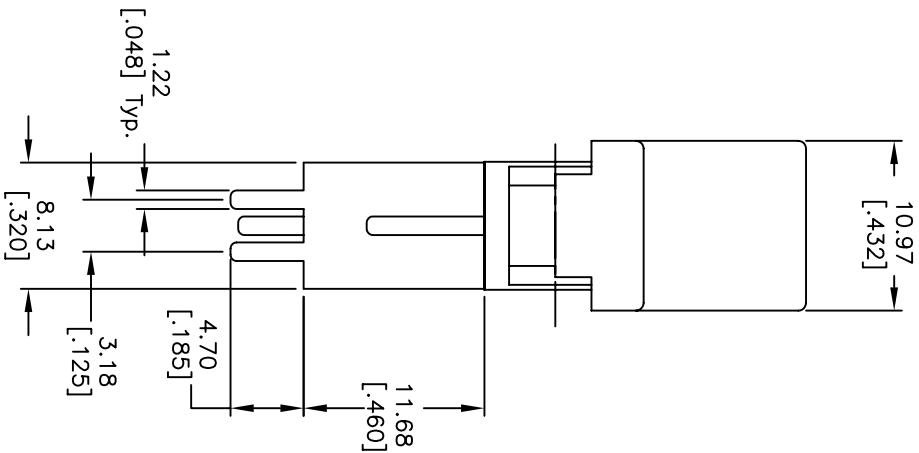
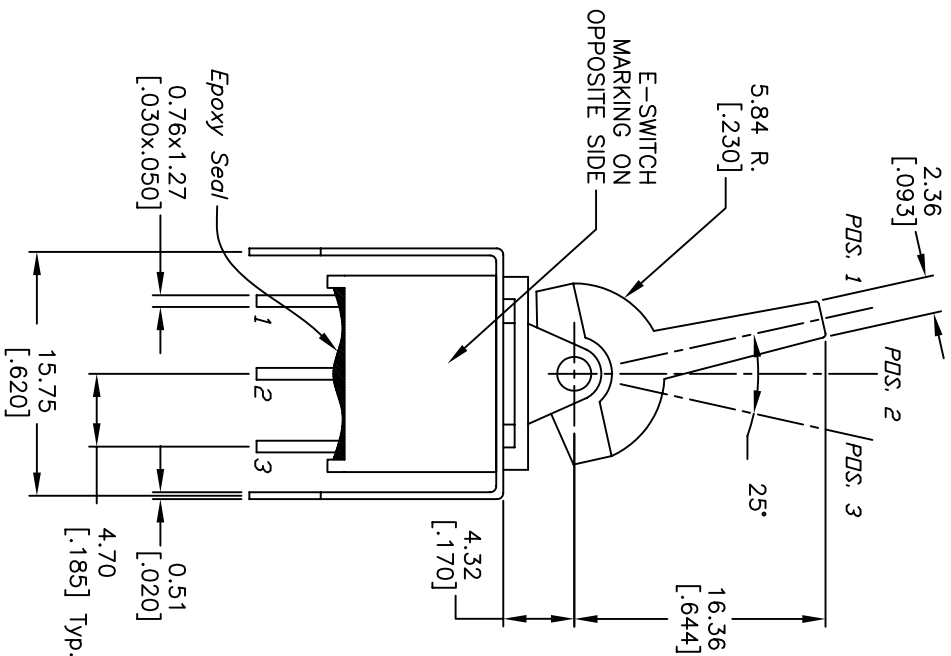


CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	DNF	⟨DN⟩	
2-3	OPEN	2-1	

()=Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA Max. @20V Max. (AC or DC)
5. ELECTRICAL LIFE: 30,000 make-and-break cycles
at full load.
6. INSULATION RESISTANCE: 1000M ohm min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C



TITLE			
3004 WSP-5 J6 VS2 R E			
REV.	ECN No.	DESCRIPTION	DATE
A	10559	RELEASED FOR PRODUCTION	3/7/00
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE	DATE	DR	DWG
2:1	3/7/00	MM	T301502
			REV
			A