



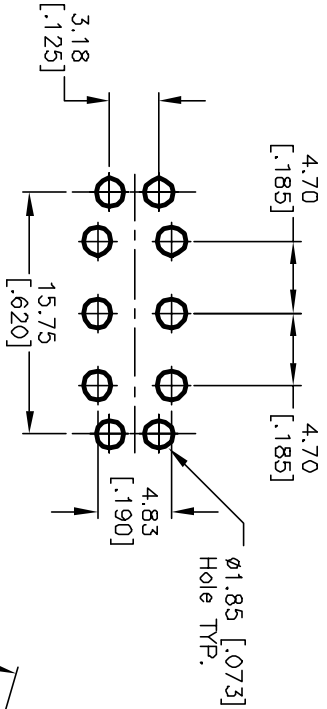


RECOMMENDED P.C.B. LAYOUT



SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
$\langle DN \rangle$	$\langle DF \rangle$	$\langle DN \rangle$
2-3,5-6	OPEN	2-1,5-4

NOTES: () = Momentary

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC; 2A @250VAC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT Copper Alloy w/SILVER PLATE over Gold flash.
6. CONTACT RESISTANCE: 10mILL Ohms max initial @2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 30,000 make-and-break cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sed level
10. OPERATING TEMP.: -30°C to 85°C

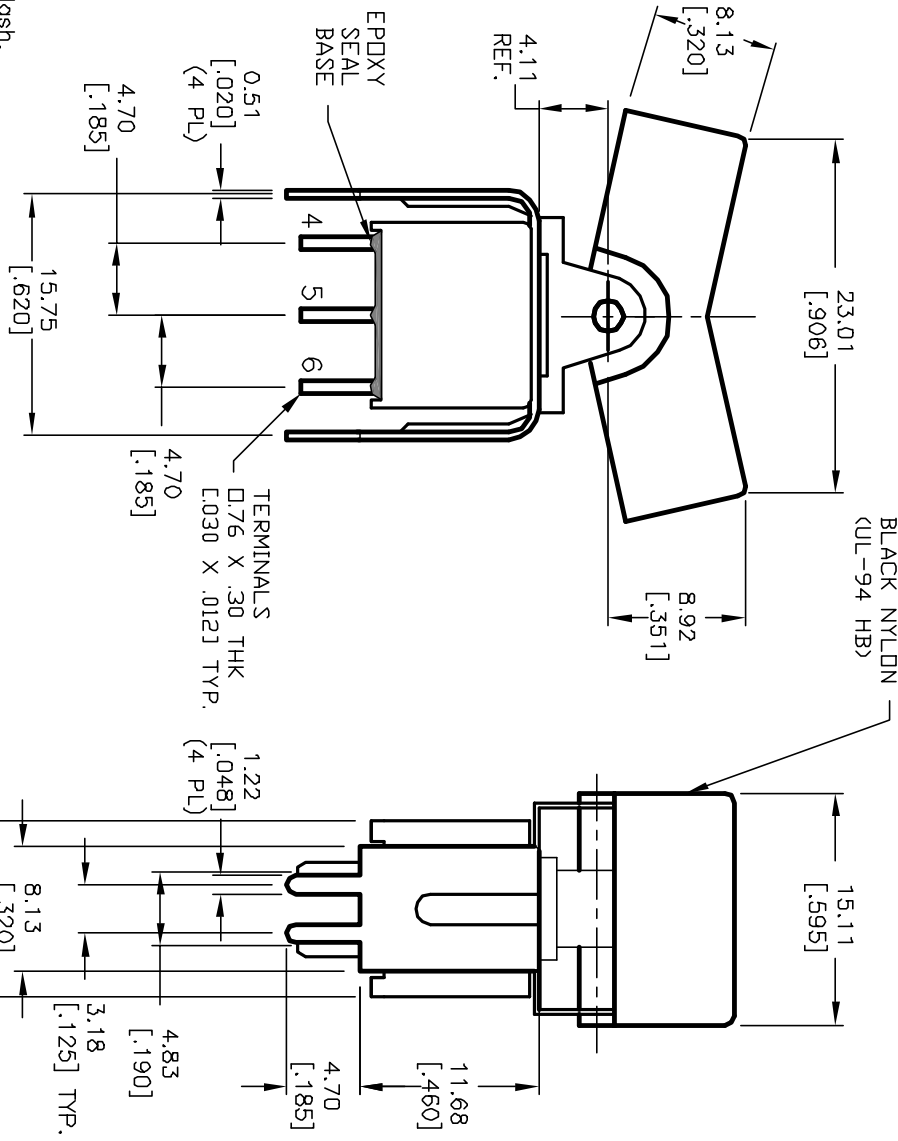

			TITLE				
A	12444	RELEASED FOR PRODUCTION	9/24/02	300A WDP-4 J3 VSS2 Q E			
REV.	ECN NO.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
			SCALE	DATE	DR	DWG	
			2:1	9/24/02	CJB	T302018	
						REV	
						A	