

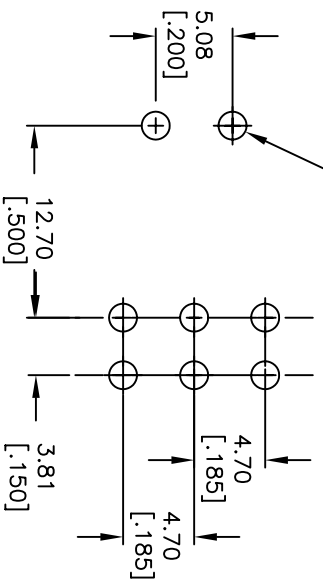
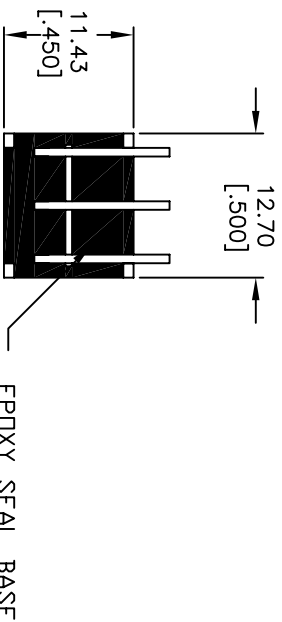


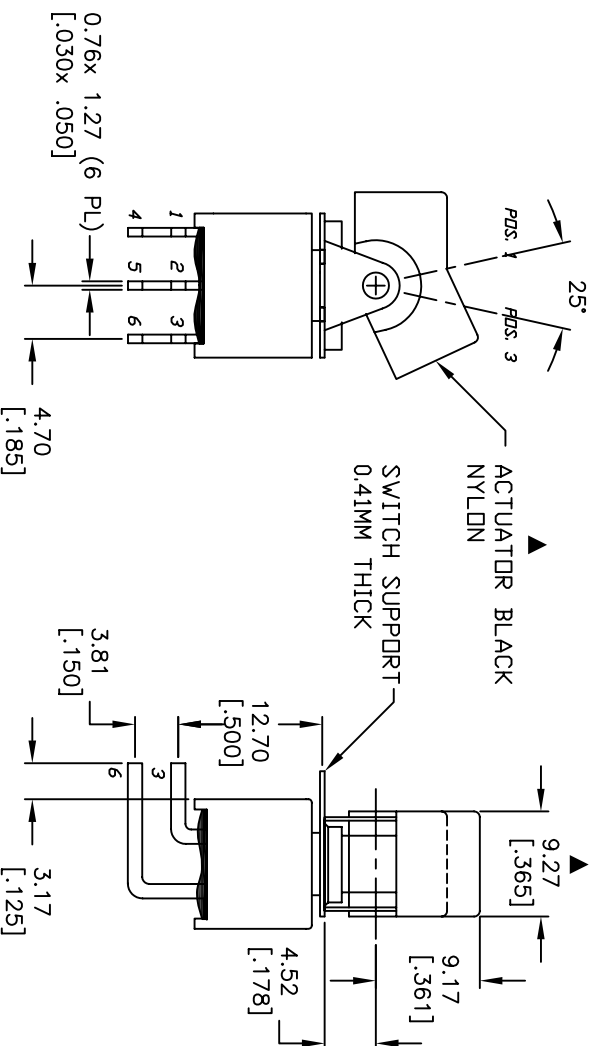

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
DN	OFF	DN
2-3,5-6	OPEN	2-1,4-5

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC

- ▲5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver Plate
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 30,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (ROHS) COMPLIANT

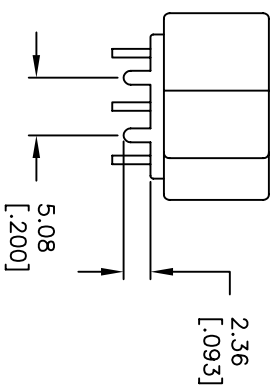

				TITLE	
				300AWDP3J1M6QE	
B	17403	UPDATE NOTES, SWITCH FUNCTION	6/20/07	TN	
A	13252	RELEASED FOR PRODUCTION	6/27/03	AR	
REV.	ECN No.	DESCRIPTION	DATE	CHKD	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					
SCALE			2:1	DATE	6/20/07
			DR	TN	DWG
					T302108
			REV	B	