
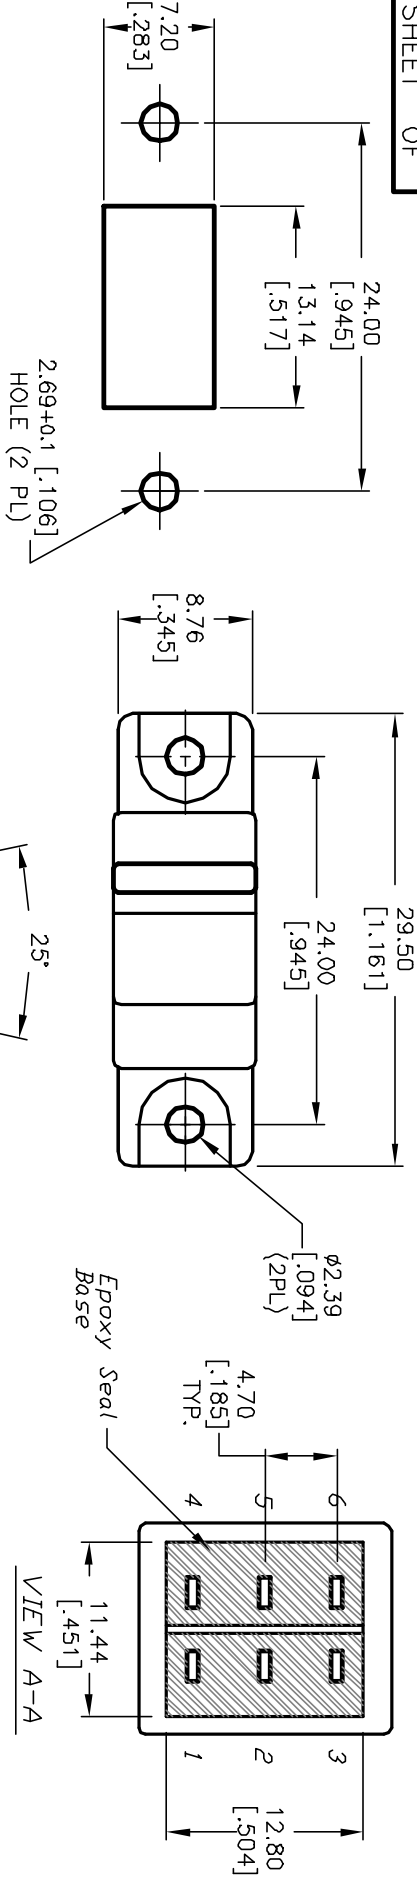


SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
<DN>	DFF	<DN>	
2-3.5-6	OPEN	2-1.5-4	

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 29VDC 2A @250VAC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT Copper Alloy w/SILVER PLATE over Gold flash.
6. CONTACT RESISTANCE: 10mILL Ohms max initial @2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 30,000 make-and-break cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

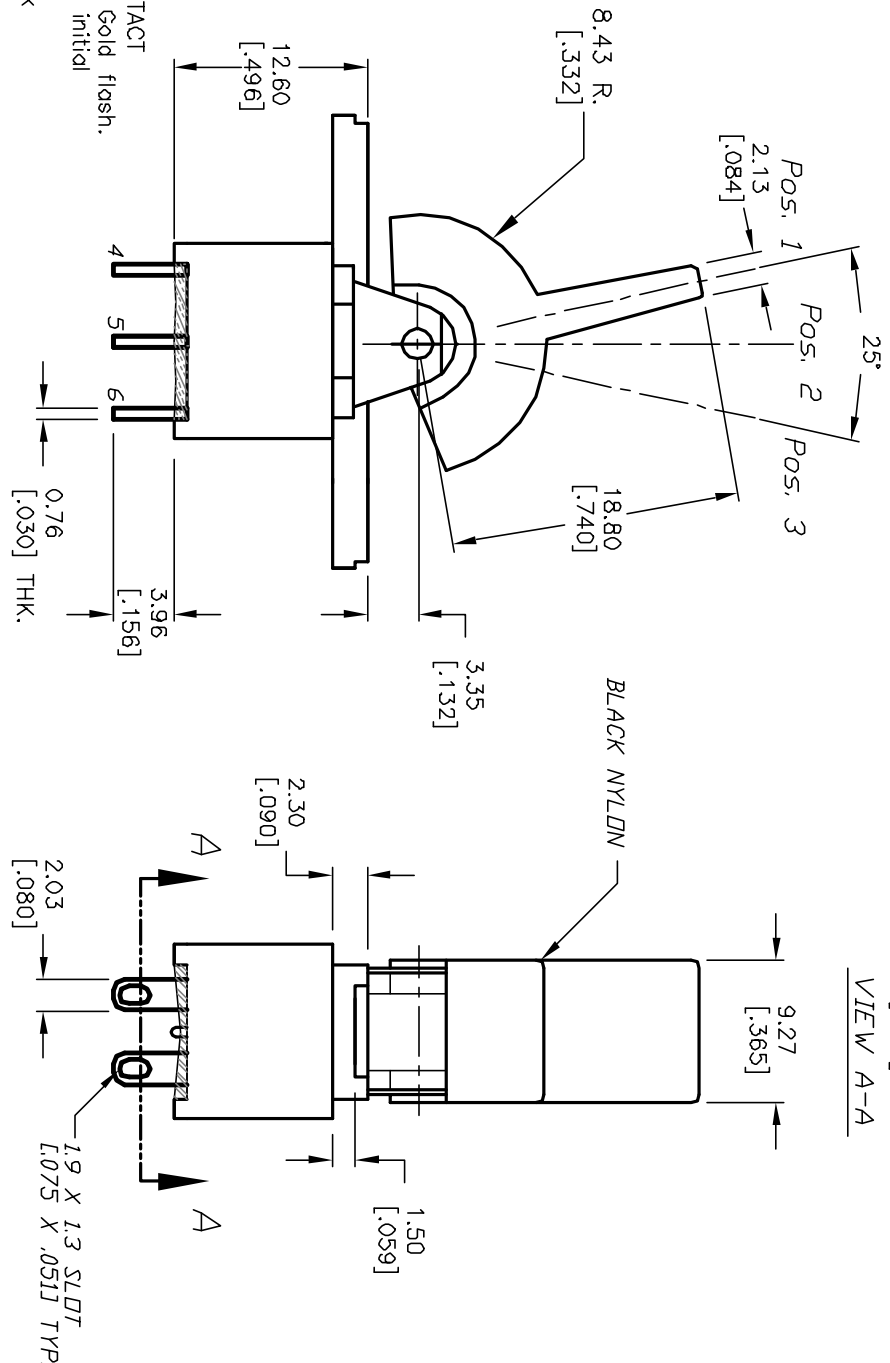

					TITLE					
					3004 WDP-4 R2 BLK M1 Q E					
B		12116	REVISED AND REDRAWN		6/13/02		CB			
REV.		ECN No.	DESCRIPTION		DATE		CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED										
					SCALE		DATE		DR	
					2:1		6/13/02		CB	
									DWG	
									T302111	
									REV	
									B	