




RECOMMENDED P.C.B. LAYOUT
SCALE 1X

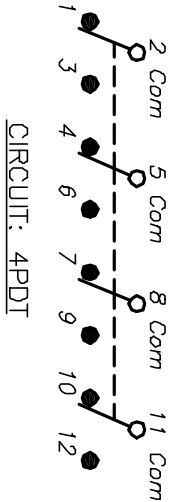


SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	DIFF	DN	
2-3,5-6 8-9,11-12	2-3, 5-4 8,9 11-10	2-1, 5-4 8,7 11-10	

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC; 2A @250VAC.
5. CONTACT MATERIAL: Copper Alloy w/Silver Plating.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

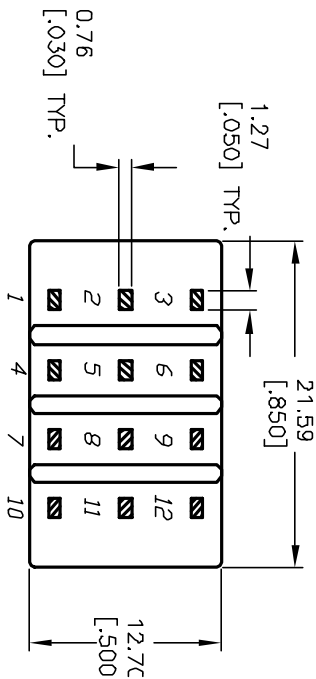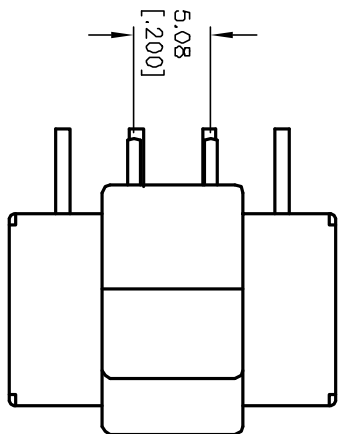

SECTION A-A

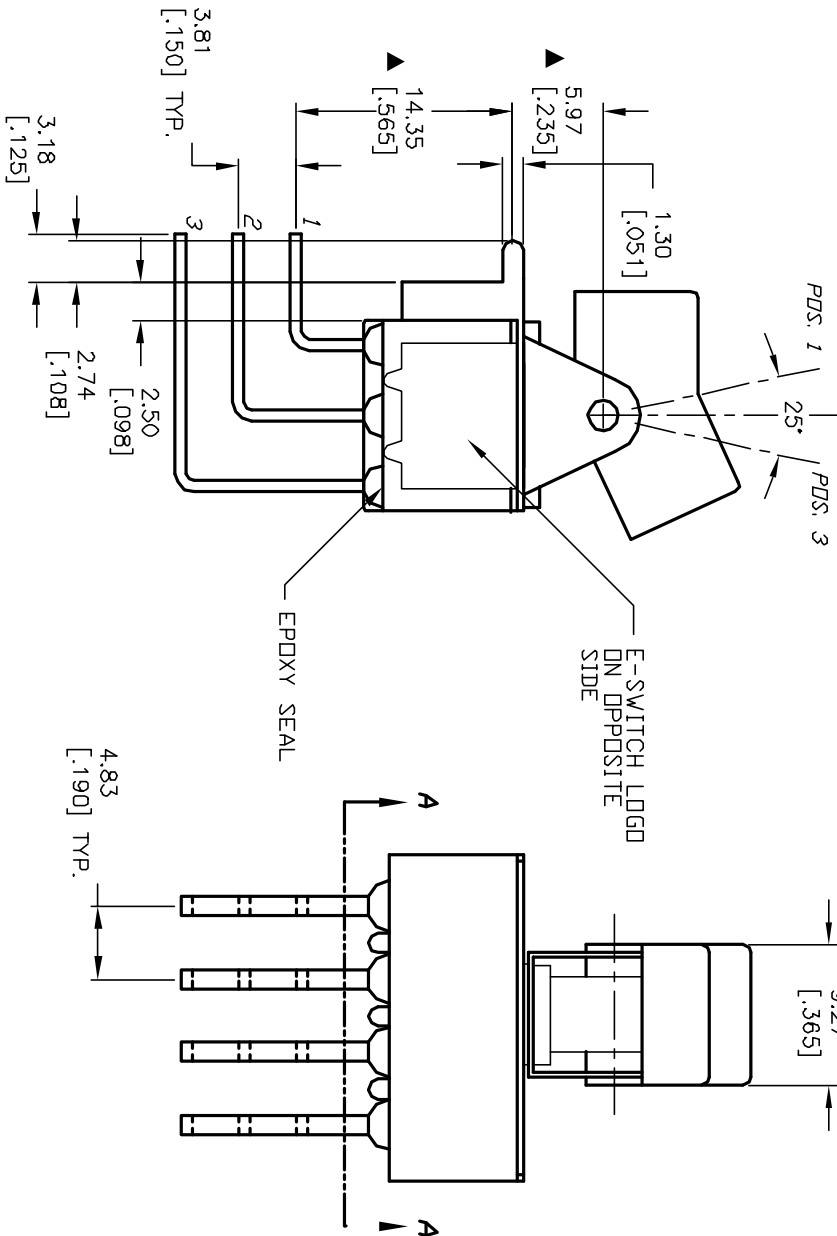

TITLE			
3004P3J1BLKM7QE			
E-SWITCH®			
A	13096	RELEASED FOR PRODUCTION	4/30/03
REV.	ECN No.	DESCRIPTION	DATE
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE 2:1			
DATE 4/30/03			
DR AR			
DWG T346006			
REV A			