

CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
<DN>	OFF	<DN>
2-3	OPEN	2-1

()=Momentary


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NDS. FOR REF. ONLY
4. RATING: 3A @120VAC or 28VDC.
1A @250VAC.
5. FIXED TERM/MOVING CONTACT
COPPER ALLOY W/SILVER PLATING
6. ELECTRICAL LIFE: 30,000 MAKE-AND-BREAK
CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1000M OHM TYPICAL
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
9. OPERATING TEMP.: -30°C to +85°C
10. ACTUATOR: NYLON BLACK (UL94-HB)




~ACTUATOR COLOR:
SEE NOTE 10

EPoxy SEAL
BASE



BOTTOM VIEW

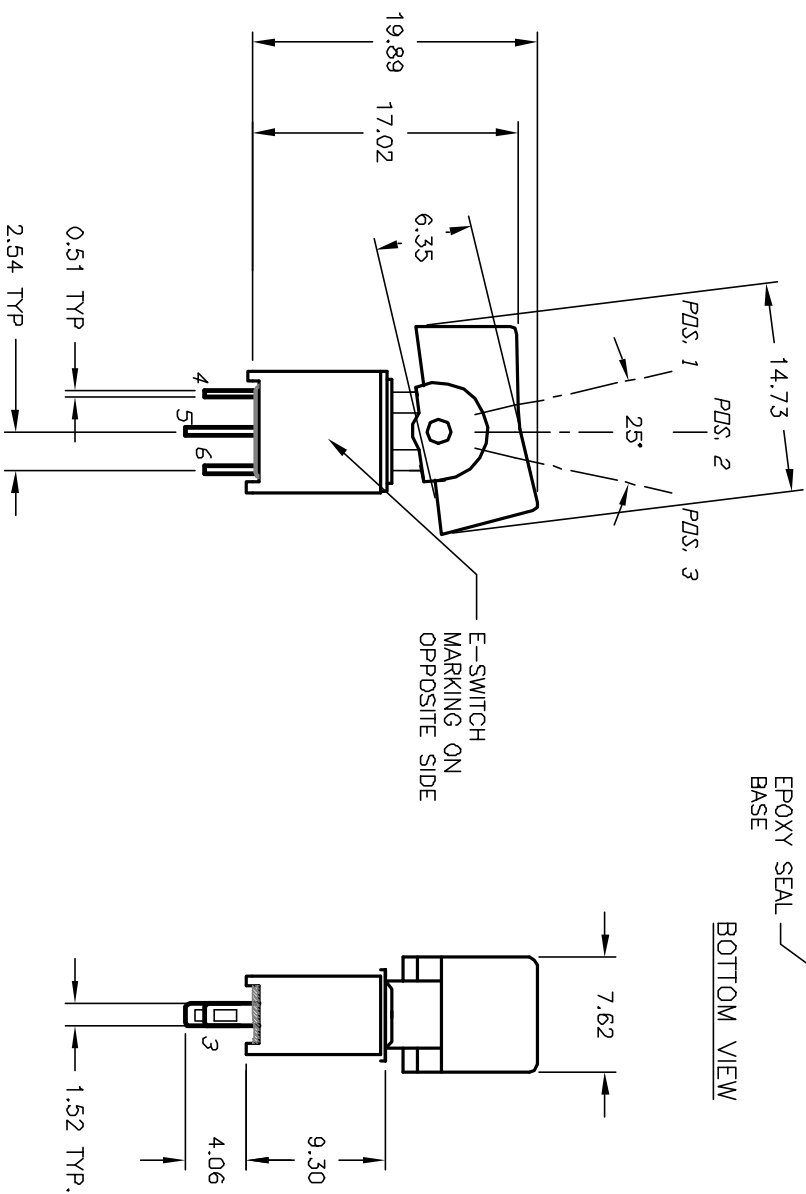

E-SWITCH®

10. ACJUAIDR: NYLON BLACK (UL94-HB)										
B	12664	REVISED NOTE 4	12/26/02	CB						
A	12207	RELEASED FOR PRODUCTION	9/13/02	CB						
REV.	ECN NO.	DESCRIPTION	DATE	CHKD						
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED										
					E-SWITCH®					
TITLE					400A W/MSP-4 (BLK) R1 M1 QE					
SCALE			2:1		DATE		9/13/02			
					DR		CB			
					DWG		T403407			
					REV		B			

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED