


RECOMMENDED P.C.B. LAYOUT





CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
<DN>	DFF	<DN>
2-3	DOPEN	2-1

(CON) = MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATING: 0.4(VA) MAX. @20VAC OR DC MAX.
5. FIXED TERMINAL & MOVING CONTACT: COPPER ALLOY
W/GOLD PLATE OVER NICKLE PLATE.
6. ELECTRICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES AT
FULL LOAD.
7. INSULATION RESISTANCE: 1,000M OHMS MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

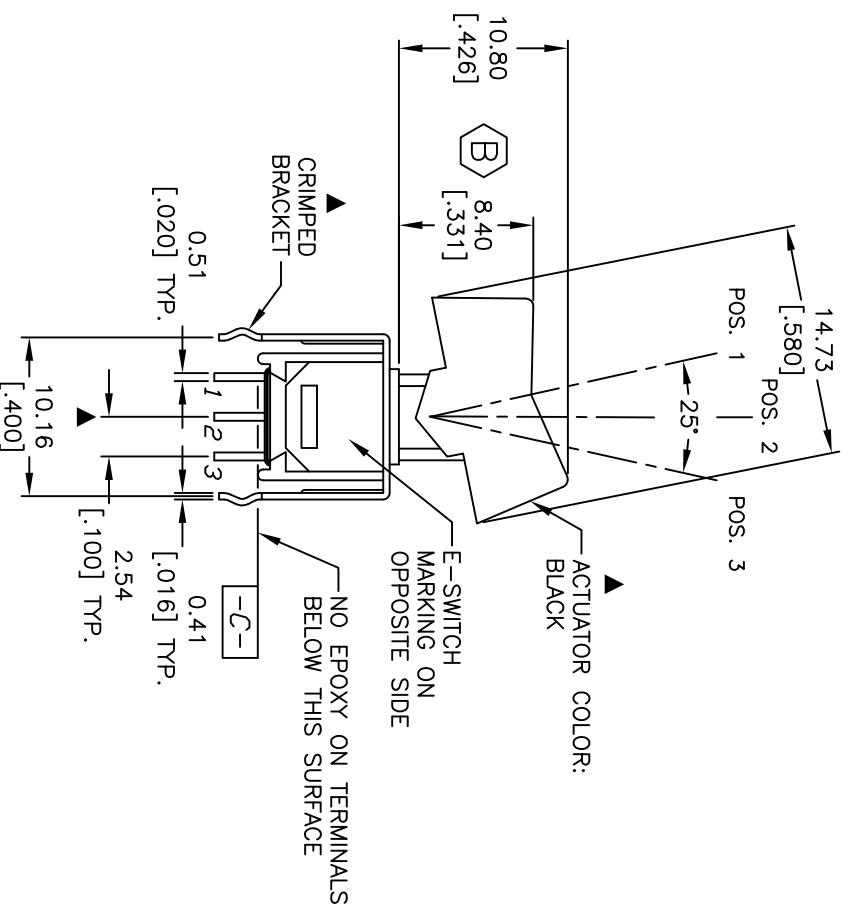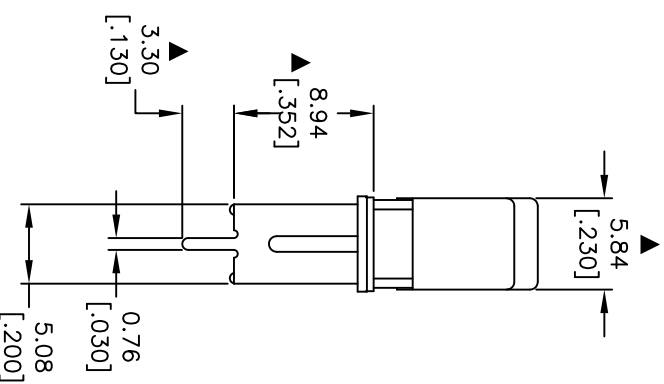

B	21285	8.40 ACTUATOR HEIGHT WAS 8.60	10/29/13	EBP
A	13501	RELEASED FOR PRODUCTION	10/1/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

E-SWITCH®				
TITLE				
400MSP4R6BLKVS21RE				
SCALE	DATE	DR	DWG	REV
2:1	10/1/03	AR	T414004	B