
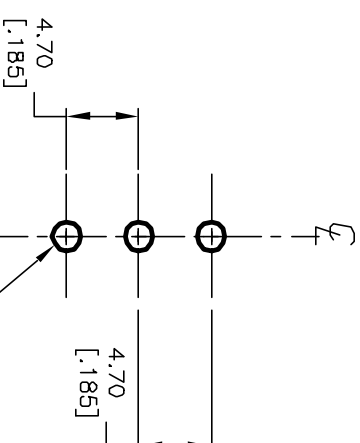
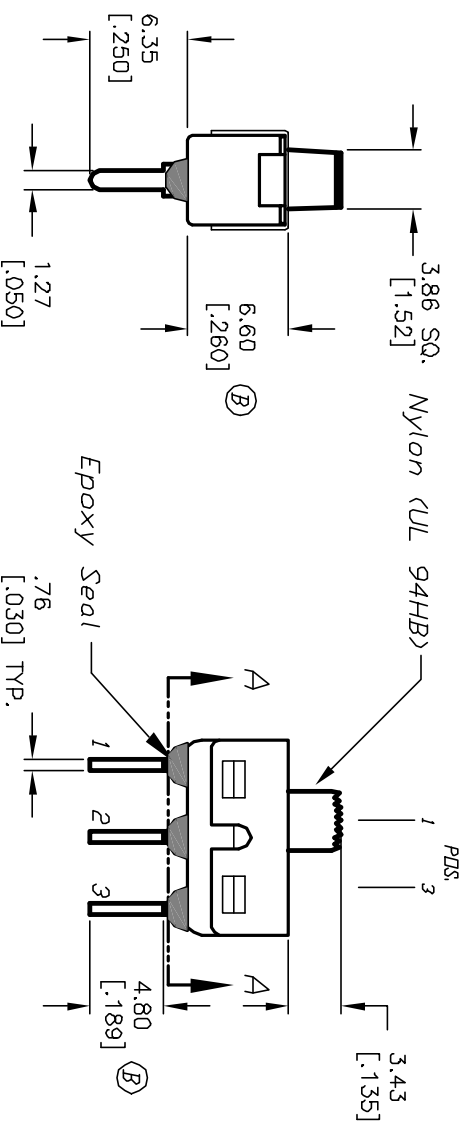





RECOMMENDED P.C.B. LAYOUT

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25

3. TERM NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V max. (AC or DC)
5. CONTACT MATERIAL:

Copper Alloy w/Gold plate over
Nickel plate.

6. ELECTRICAL LIFE: 30,000 ACTUATIONS @Full Load
7. INSULATION RESISTANCE: 1000 Mega Ohms min.
8. DIELECTRIC STRENGTH: 1000V RMS @SEA LEVEL.
9. OPERATING TEMPERATURE: -30°C TO 85°C



CIRCUIT: SPD T

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
DN	NONE	DN
2-1	OPEN	2-3

					TITLE		
					500 SSP-1 S4 M2 R E A (GOLD CONTACTS)		
B	11645	REVISED AND REDRAWN	9/6/01	CJB			
REV.	ECN No.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
			SCALE	DATE	DR	DWG	REV
			2:1	9/6/01	CJB	T514000	B