


| SWITCH FUNCTION |          |
|-----------------|----------|
| POS. 1          | POS. 2   |
|                 |          |
| ON              | (ON)     |
| 1-3, 4-6        | 1-2, 4-5 |



() = MOMENTARY





CIRCUIT: DPST

## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X $\pm$ 0.4  
X.XX $\pm$ 0.25
3. TERMINAL NUMBERS FOR REFERENCE ONLY
4. CONTACT MATERIAL: SILVER
- ▲ 5. RATING: 3A @ 120 VAC OR 28 VDC  
1A @ 250 VAC
6. ELECTRIC LIFE: 50,000 make-and-break cycles at full load
7. INSULATED RESISTANCE: 1,000mOHM MIN.
8. DIELECTRIC STRENGTH: 1,000V RMS @ sea level
9. OPERATING TEMPERATURE: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT

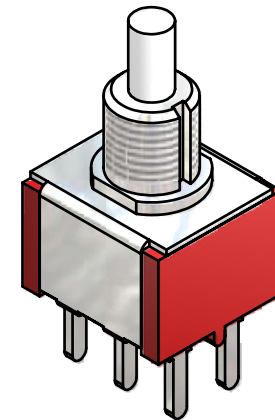

ISOMETRIC

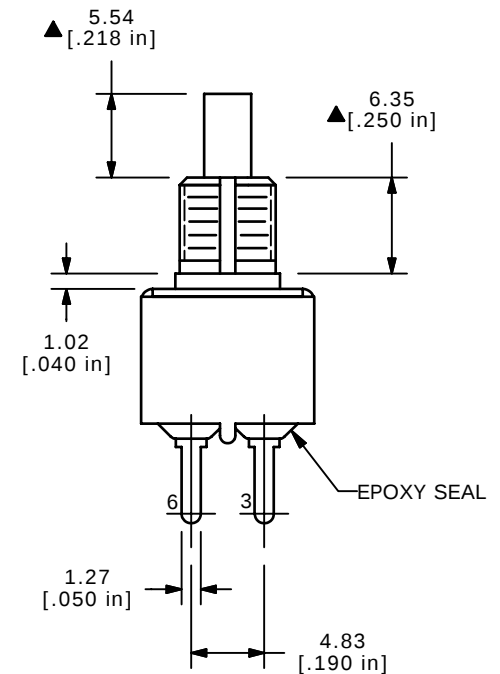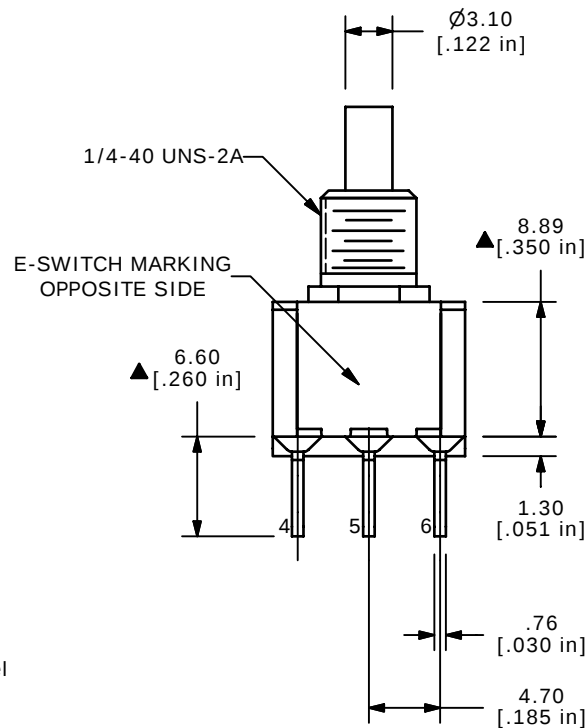

|     |        |                            |         |    |
|-----|--------|----------------------------|---------|----|
| C   | 17235  | FIXED DRAWING              | 4/27/07 | TN |
| B   | 16423  | REDRAWN IN INVENTOR FORMAT | 9/11/06 | BO |
| REV | PCR NO | DESCRIPTION                | DATE    | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 700DP7B10M2QE

SCALE 2:1

DATE 4/27/2007

DR TN

DWG T721005

REV C