

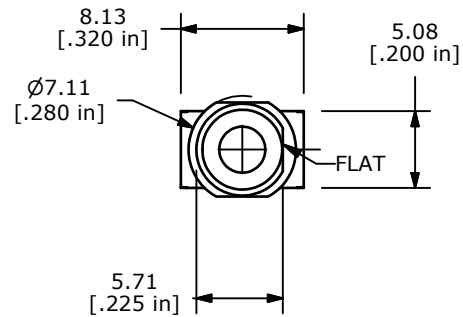




SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
2-3	2-1
(ON)=MOMENTARY	

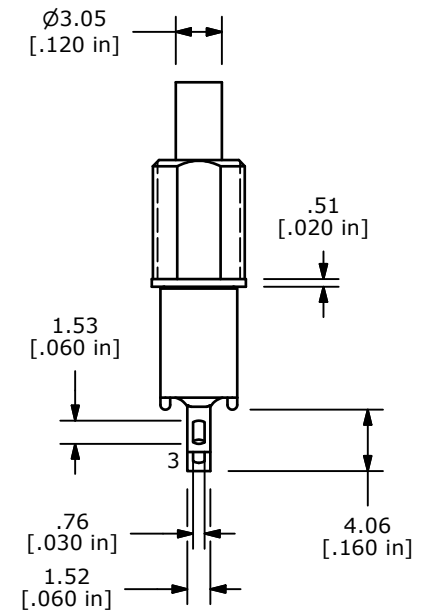

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- RATING: 1A @ 250 VAC
3A @ 120 VAC OR 28 VDC
- MECHANICAL LIFE: 50,000 MAKE-AND-BREAK CYCLES
- CONTACT RESISTANCE: 20 mΩ MAX. INITIAL @ 2-4VDC
100mA FOR BOTH GOLD AND SILVER CONTACTS
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT

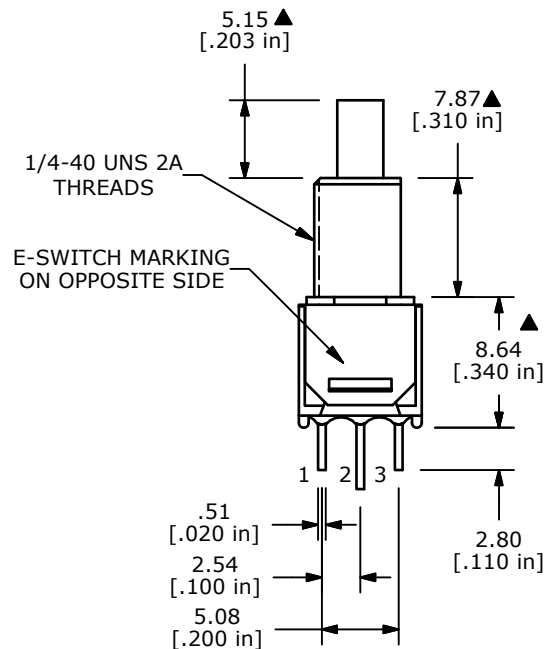

D	20023	UPDATE DRAWING	06/23/11	BMA
C	14753	REVISED AND REDRAWN	03/09/05	AR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 800SP8B9M1QE

SCALE 2:1

DATE 5/29/1996

DR MM

DWG T822013

REV D