

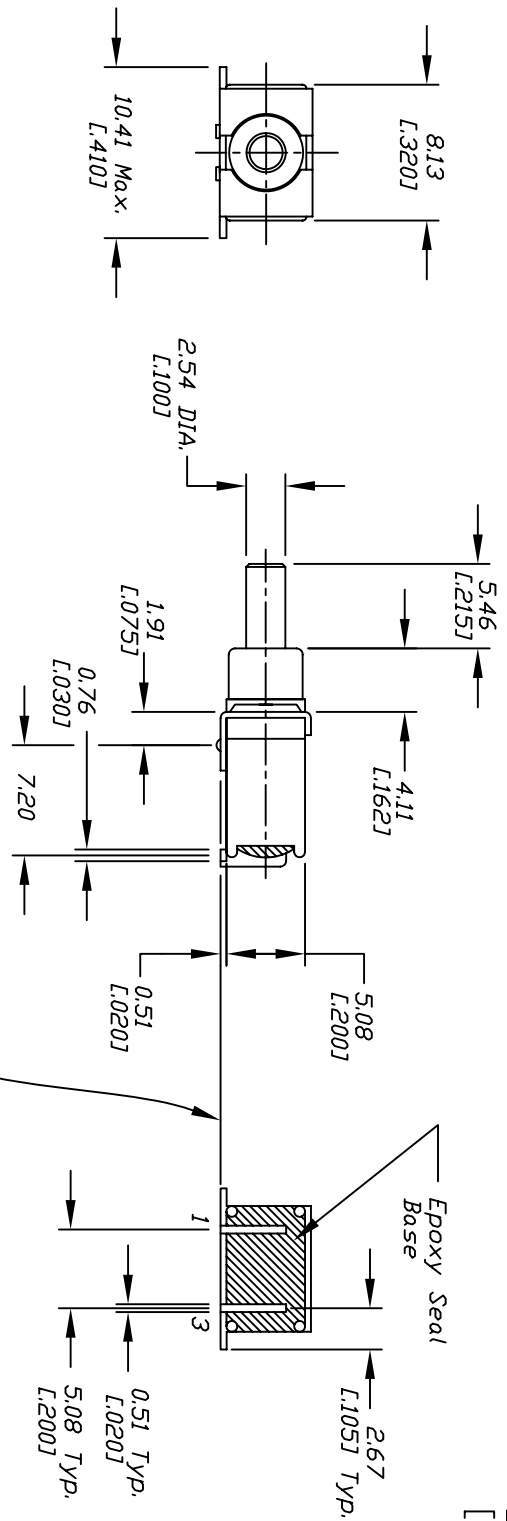


RECOMMEND MOUNTING LAYOUT

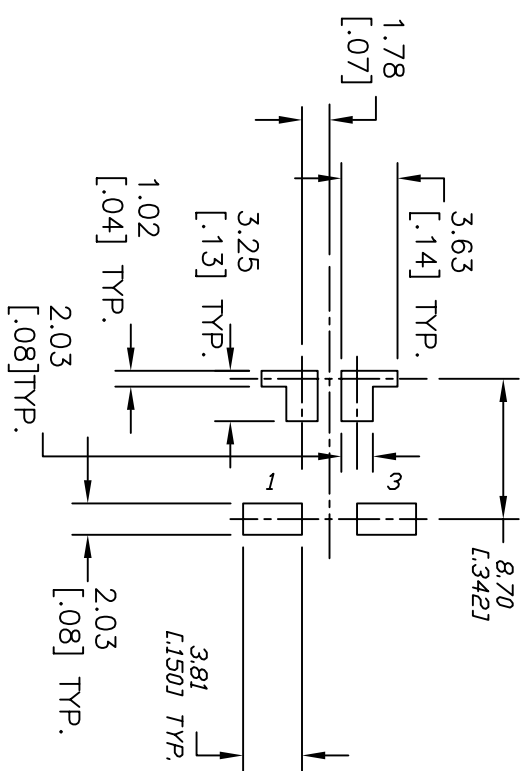

CONTACT CONFIGURATION

CIRCUIT: SPST

OFF ON

() = Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4 VA max. @20 VAC or DC max.
5. FIXED TERMINAL & MOVING CONTACT: Gold
6. ELECTRICAL LIFE: 50,000 make-and-break cycle
at full load.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C

E	15194	CHANGED DIM. FROM 9.07 TO 8.7	8/22/05	PH
D	15143	CHANGED DIM. & UPDATED NOTES	8/5/05	PV
C	10258	REVISED & REDRAWN	6/29/99	
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				
TITLE				
800B WSP9 SM6 R E				
SCALE				
2:1				
DATE				
8/28/97				
DR				
MM				
DWG				
T833015				
REV				
E				