

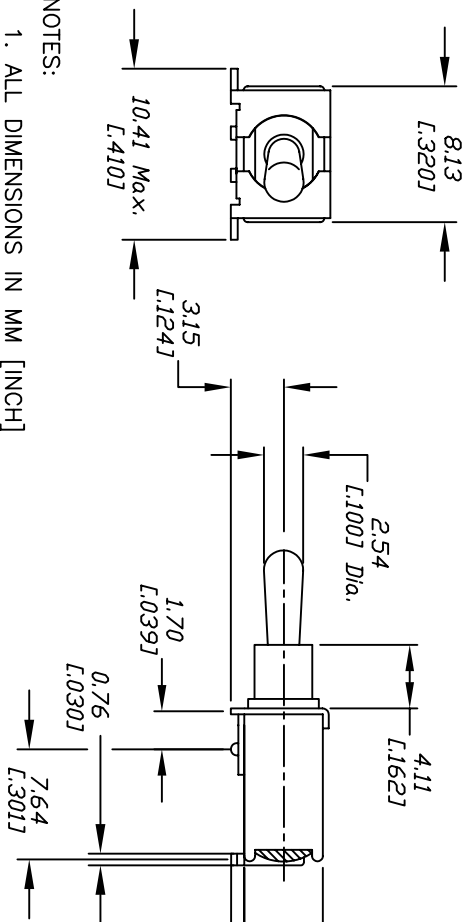
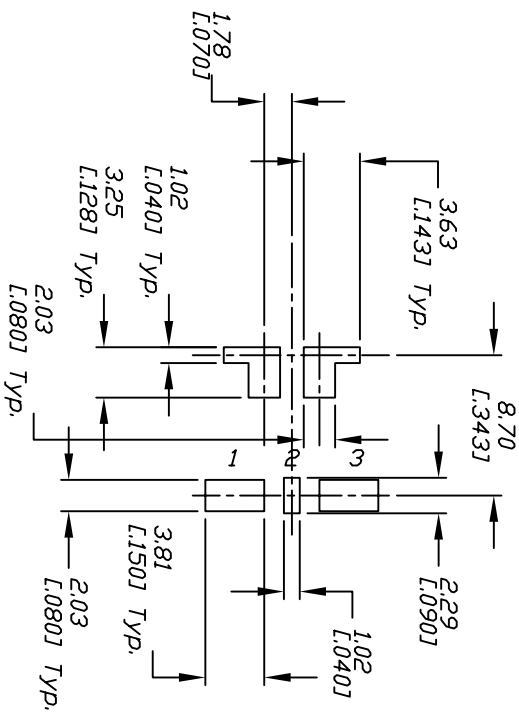


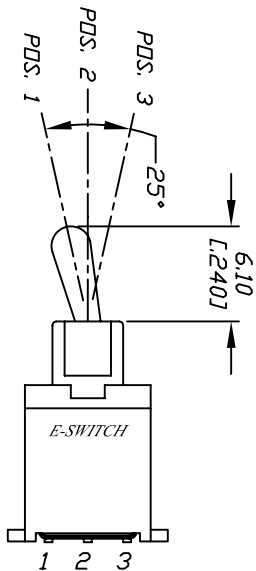

Coplanar within 0.10 [0.004] total.

Epoxy Seal Base

RECOMMEND MOUNTING LAYOUT



CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	NDNE	DN	
2-3	N/A	2-1	

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. CONTACT RATING: 0.4 VA max. @20 VAC or DC max.
 5. FIXED TERMINAL & MOVING CONTACT: Cu alloy w/Au plate over Ni plate.
 6. ELECTRICAL LIFE: 50,000 make-and-break cycle at full load.
 7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
 8. OPERATING TEMP.: -30°C to 85°C
 9. 2002/95/EC (ROHS) COMPLANT

E-SWITCH®

D	16058	UPDATE DIMENSIONS	5/30/06	CT
C	15989	UPDATE DIMENSIONS	4/26/06	CT
B	11201	DIMENSION ADDED	1/26/01	CJB
A	10259	RELEASED FOR PRODUCTION	6-29-99	MM
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE				
200B W/MSP-1 T2 A1 SM6 R E				
SCALE	DATE	DR	DWG	REV
2:1	6/29/99	MM	T833017	D