
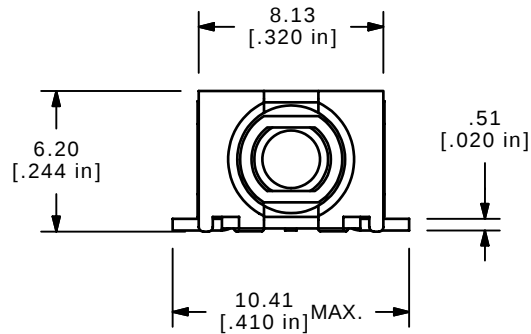
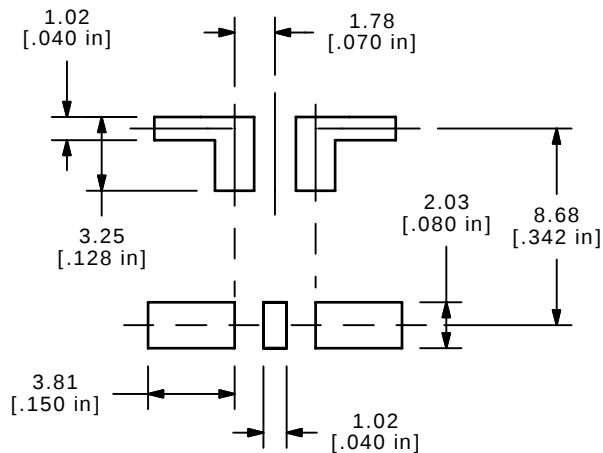
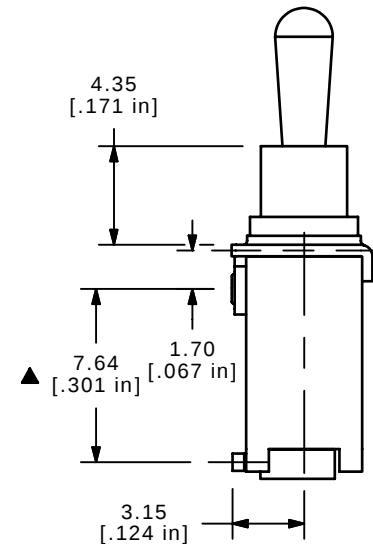


ISOMETRIC

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	(ON)
2-3	N/A	2-1

(ON)=MOMENTARY

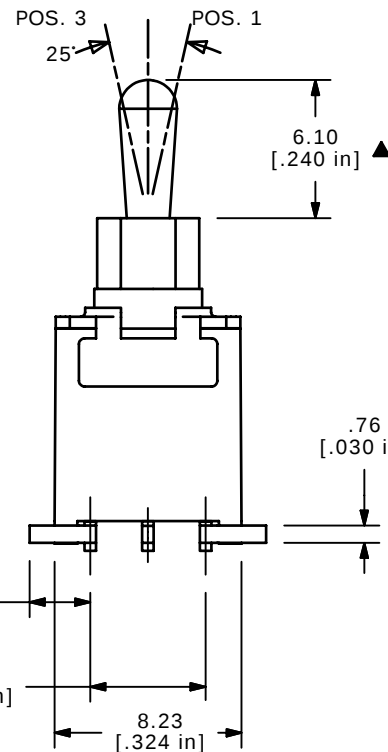

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
4. PLATING MATERIAL: GOLD
5. RATING: 0.4VA MAX. @ 20VAC OR DC
6. MECHANICAL LIFE: 50,000 MAKE AND BREAK CYCLES AT FULL LOAD
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS@SEA LEVEL
9. OPERATING TEMPERATURE: -30°C TO 85°C
10. ▲ DENOTES MAJOR DIMENSION.
11. 2002/95/EC (ROHS) COMPLIANT

B	16954	ADDED POS. DIAGRAM	2/2/07	TN
A	15587	NEW RELEASE	12/6/05	PH
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 200BWMSP2T2A1SM6RE

SCALE 3:1

DATE 2/2/2007

DR TN

DWG T833033

REV B