



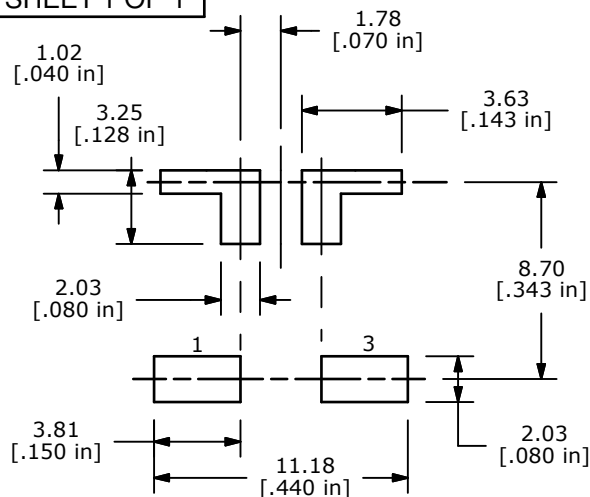


PCB LAYOUT

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	1-3



(ON) = MOMENTARY



CIRCUIT: SPST

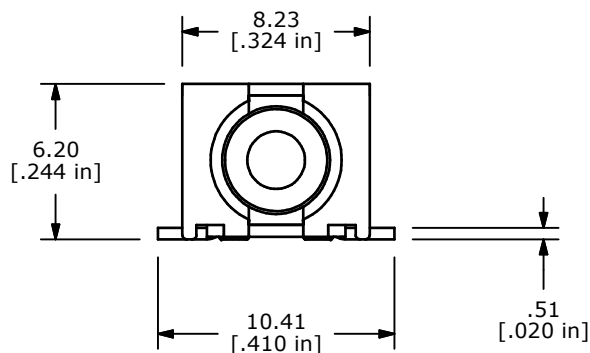

ISOMETRIC

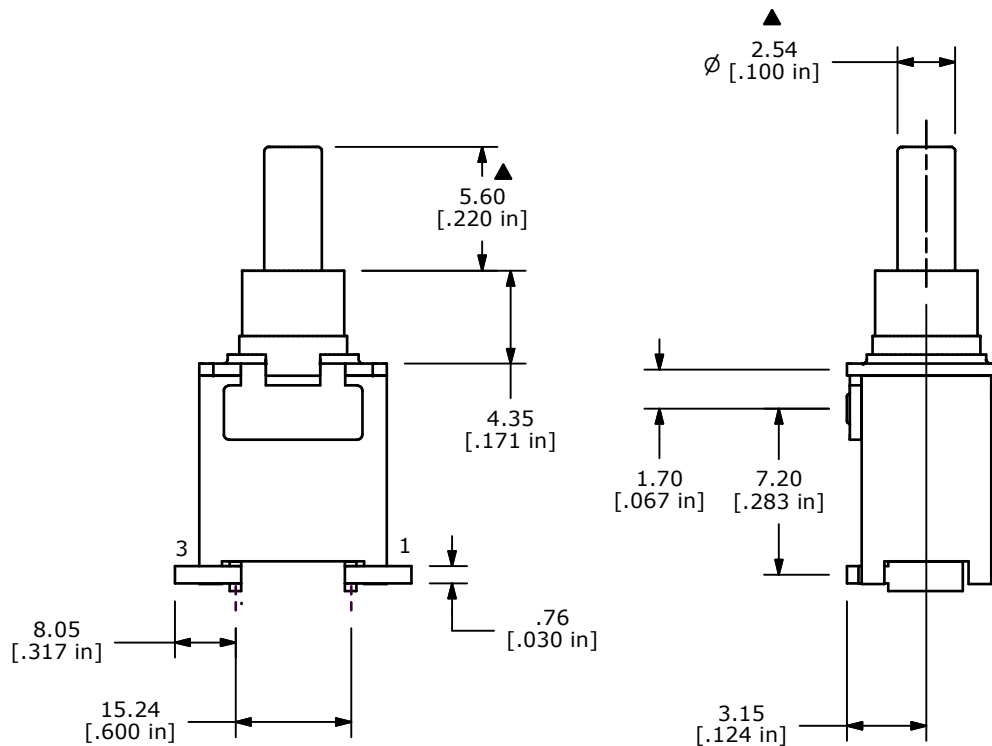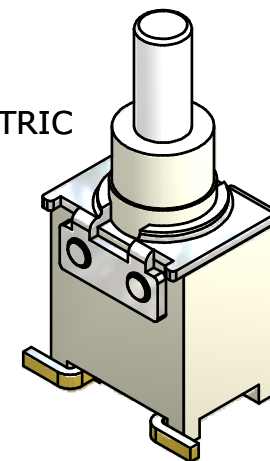

NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. TERMINAL NUMBERS FOR REF. ONLY.
3. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
4. PLATING MATERIAL: SILVER
- ▲ 5. RATING: 3A @ 120VAC (or 28VDC)
1A @ 250VAC
6. CONTACT RESISTANCE: 20 Milli-OHMS MAX.
7. MECHANICAL LIFE: 50,000 MAKE AND BREAK
CYCLES AT FULL LOAD
8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
9. DIELECTRIC STRENGTH: 1,000 VRMS @ SEA LEVEL
10. OPERATING TEMPERATURE: -30°C TO 85°C
11. ▲ DENOTES CRITICAL PARAMETER
12. PACKAGED 500 PCS. / REEL
13. 2002/95/EC (ROHS) COMPLIANT.



E-SWITCH®



TITLE 800BWSP9SM6QE

A	18621	Release For Production	9/21/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
3:1	9/21/2009	BLR	T833034	A