




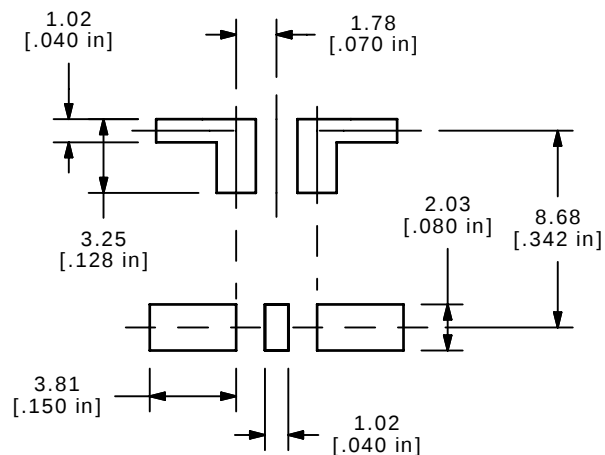


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	(ON)
2-3	N/A	2-1


(ON)=MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
4. PLATING MATERIAL: SILVER
5. RATING: 3A @ 120VAC OR 28VDC; 1A @ 250VAC
6. MECHANICAL LIFE: 50,000 MAKE AND BREAK CYCLES AT FULL LOAD
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS@SEA LEVEL
9. OPERATING TEMPERATURE: -30°C TO 85°C
10. ▲ DENOTES MAJOR DIMENSION.
11. 2002/95/EC (ROHS) COMPLIANT

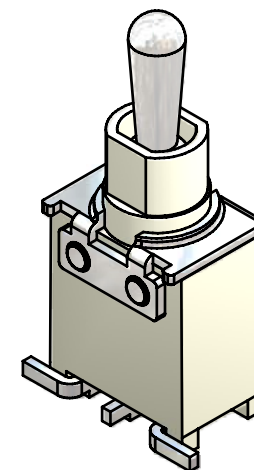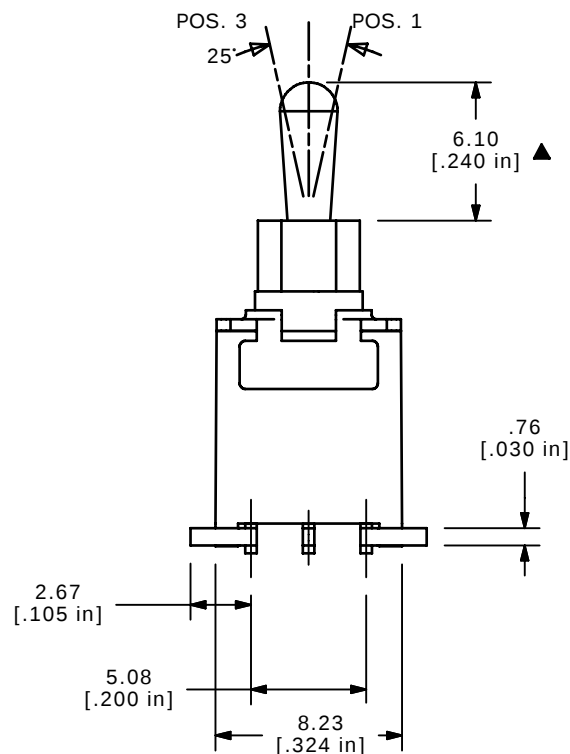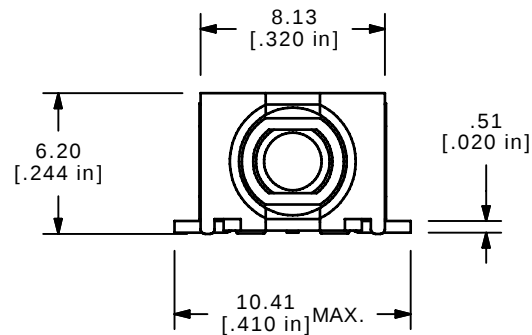

ISOMETRIC

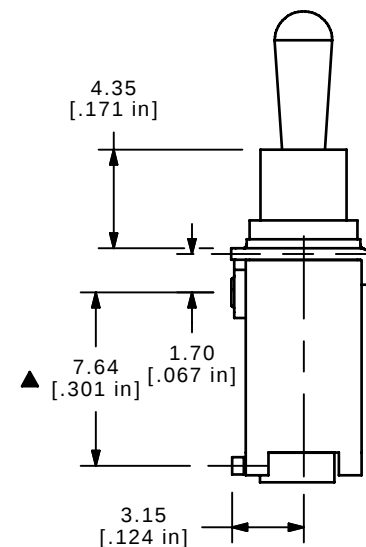**E-SWITCH®**

TITLE 200BWMSP2T2A1SM6QE

SCALE 3:1

DATE 8/7/2012

DR rc

DWG T833035

REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A	20696	NEW RELEASE	8/7/12	rc
REV	PCR NO	DESCRIPTION	DATE	BY