
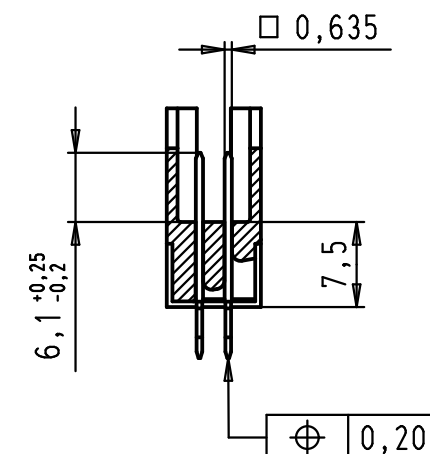
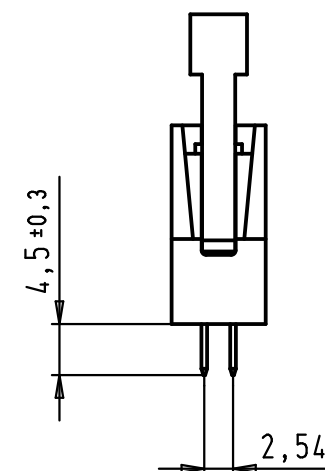


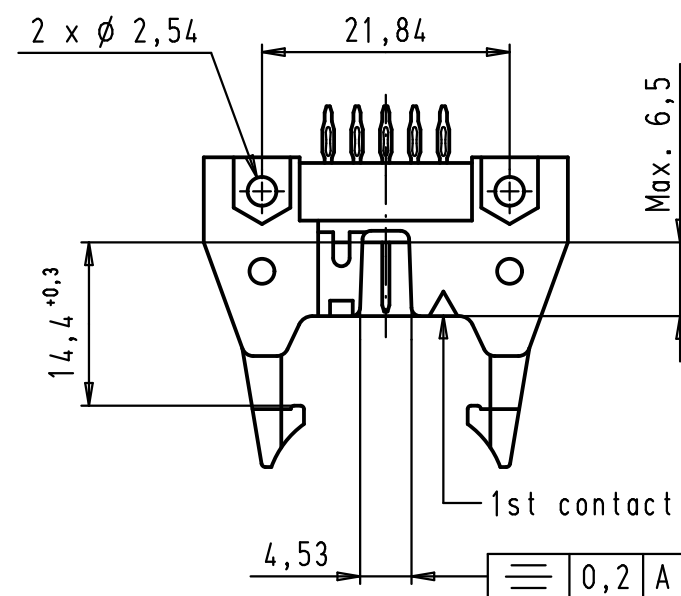

Technical drawing of a mechanical part showing dimensions and tolerances. The drawing includes the following features:

- Overall Width:** 27,94
- Overall Height:** 2,54
- Internal Feature Height:** 1,52
- Feature 1 (Left):** Labeled "All holes¹⁾". It has a diameter of $\varnothing 0,05$ and a position tolerance of $\pm 0,05$ relative to the datum.
- Feature 2 (Right):** Labeled "1st contact". It has a minimum diameter of $\text{Min. } \varnothing 2,8$ and a position tolerance of $\pm 0,05$ relative to the datum.
- Feature 3 (Bottom):** Labeled "2nd contact". It has a diameter of $\varnothing 2,54$ and a position tolerance of $\pm 0,05$ relative to the datum.
- Feature 4 (Bottom):** Labeled "2nd contact". It has a diameter of $\varnothing 2,54$ and a position tolerance of $\pm 0,05$ relative to the datum.
- Feature 5 (Bottom):** Labeled "2nd contact". It has a diameter of $\varnothing 2,54$ and a position tolerance of $\pm 0,05$ relative to the datum.
- Feature 6 (Bottom):** Labeled "2nd contact". It has a diameter of $\varnothing 2,54$ and a position tolerance of $\pm 0,05$ relative to the datum.

09 18 510 7909	3
09 18 510 6909	2
09 18 510 5909	1 (0,76 $\mu\text{m Au}$)
Part number	Performance level

			Det.	Name		SEK 18 Male Connector Standard 10 poles Press in Long locking levers	Maßstab/ Scale 1,5:1	
			Detail.	13/07/06				PK
EC00823	16/09/09	PK	Insp.					
33950	13/03/07	PK	Stand.					
33803	15/09/06	PK	HARTING EURL F-95972 Paris				TB 09 18 510 X909	Blatt/ Page 1 / 1
33784	13/07/06	PK						
Mod.	Det.	Name				Sub.		