
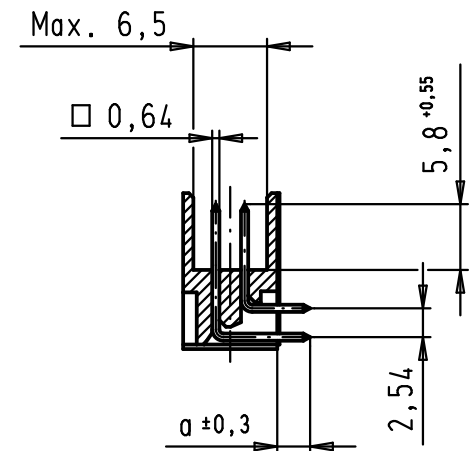


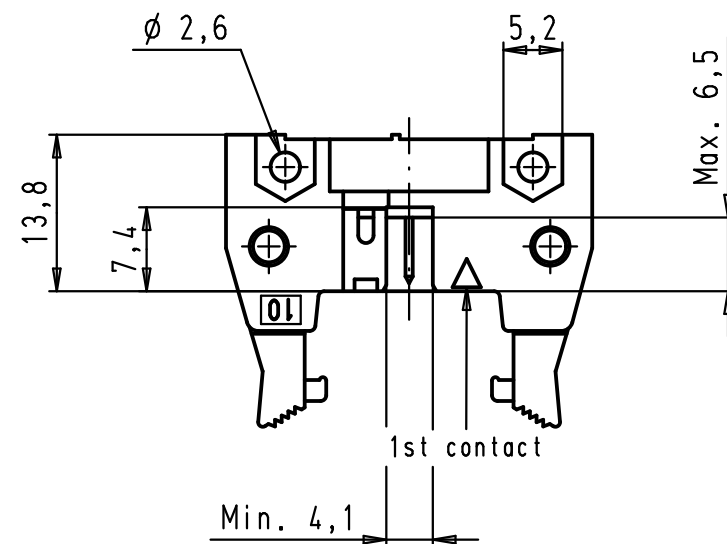

Technical drawing of a 4-hole plate. The drawing shows a rectangular plate with four holes arranged in a 2x2 grid. The holes are labeled "1st contact". The dimensions and tolerances are as follows:

- Overall width: 21,84
- Overall height: 2,54
- Distance between hole centers (pitch): 2,54
- Distance from the left edge to the first hole center: 0,74
- Distance from the right edge to the last hole center: 2,54
- Distance from the top edge to the first hole center: 2,54
- Distance from the bottom edge to the last hole center: 2,54
- Minimum hole diameter: Min. $\phi 2,8$
- Hole diameter tolerance: $\phi 0,05$

09 18 510 7901	3	4,5
09 18 510 6901	2	4,5
09 18 510 5901	0,76 $\mu\text{m Au}$	4,5
09 18 510 7903	3	2,9
09 18 510 6903	2	2,9
09 18 510 5903	0,76 $\mu\text{m Au}$	2,9
Part number	Performance level	a

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 3	SEK 18 Male Connector Standard 10 poles Angled pins Long locking levers	Maßstab/ Scale 1,5:1	
34890	31/01/08	PK	Detail.	01/12/99	JB				
29753	11/03/02	JB	Insp.						
29739	03/12/01	JB	Stand.						
27931	15/06/00	JB	HARTING EURL F-95972 Paris					TB 09 18 510 X90X	Blatt/ Page 2 / 2
26554	01/12/99	JB							
Mod.	Dat.	Name							