
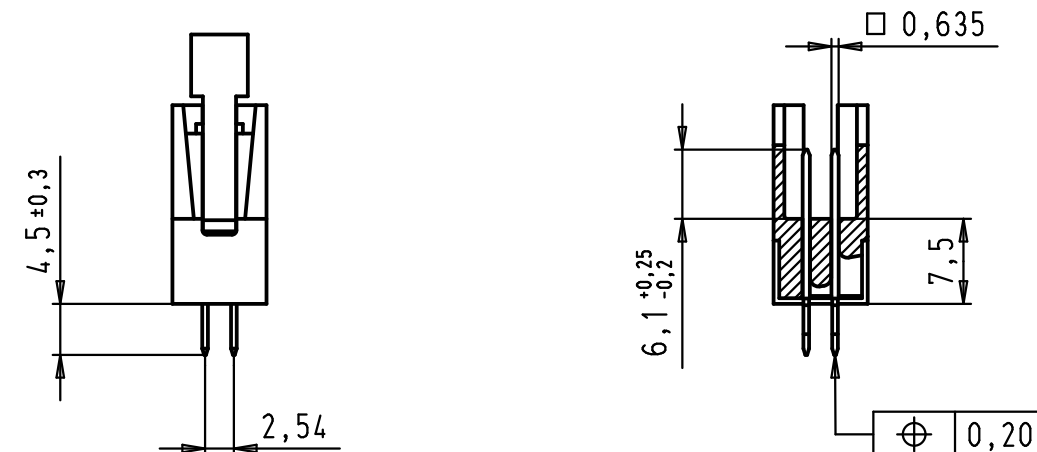


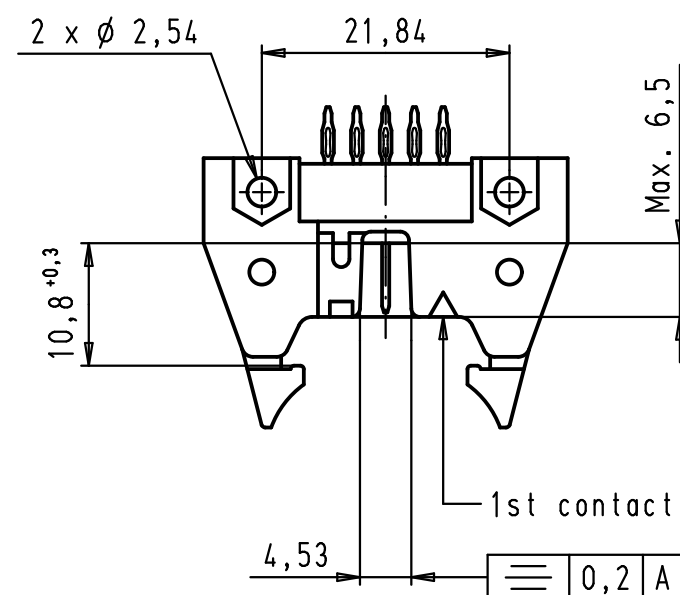

Technical drawing of a contact strip with dimensions and tolerances:

- Overall width: 27,94
- Overall height: 2,54
- Distance from top edge to center of first contact: 1,52
- Distance between centers of contacts: 2,54
- Distance from bottom edge to center of first contact: 2,54
- Distance between centers of contacts (repeated 4 times): $2,54 \times 4 = (10,16)$
- Label: "All holes¹⁾"
- Label: "1st contact"
- Label: "2nd contact"
- Label: "Min. $\phi 2,8$ "
- Feature 1: $\phi 0,05$
- Feature 2: $\phi 0,05$

09 18 510 7919	3
09 18 510 6919	2
09 18 510 5919	1 (0,76 $\mu\text{m Au}$)
Part number	Performance level

				Dat.	Name		SEK 18 Male Connector Standard 10 poles Press in Short locking levers	Maßstab/ Scale 1,5:1
			Detail.	12/09/06	PK			
			Insp.					
EC00823	16/09/09	PK	Stand.					
33950	13/03/07	PK	HARTING EUROL F-95972 Paris				TB 09 18 510 X919	Blatt/ Page 1 / 1
33803	12/09/06	PK						
Mod.	Dat.	Name					Sub.	