
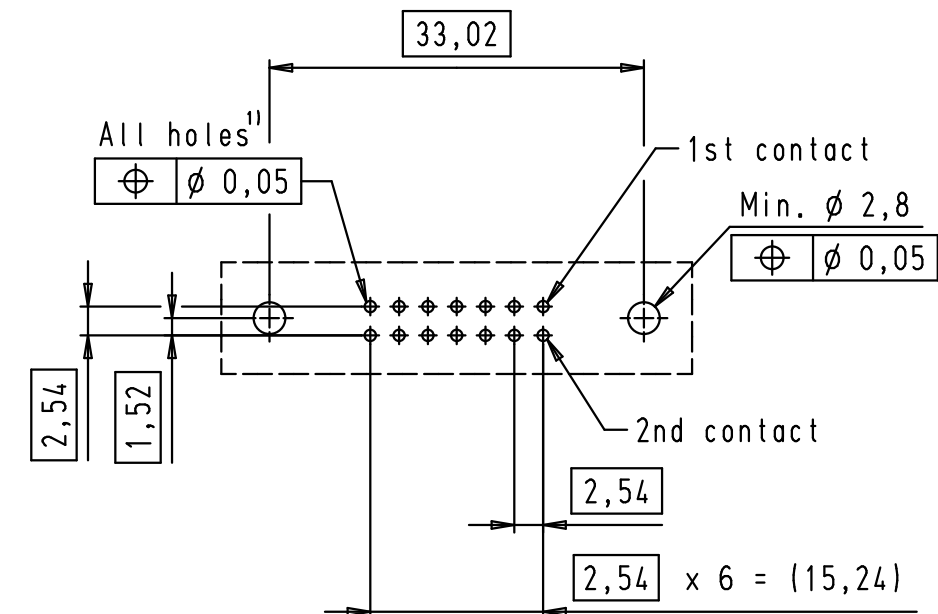



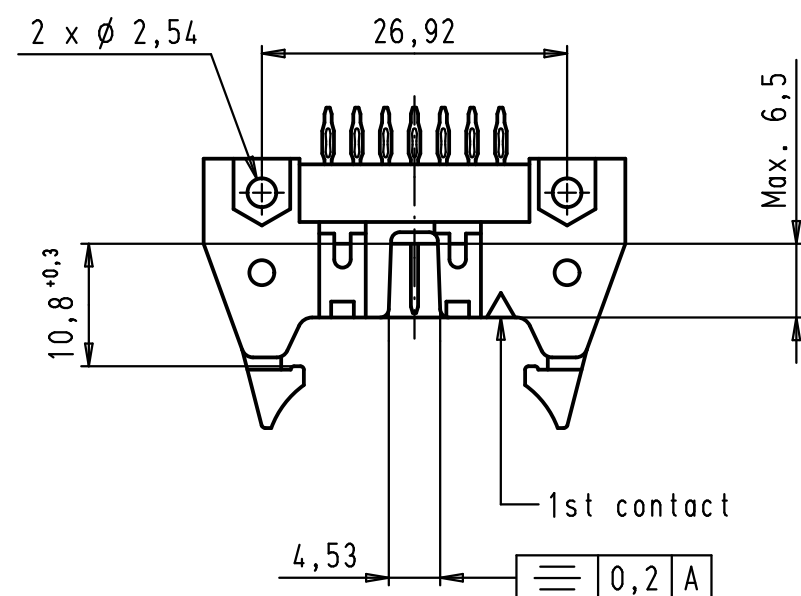

1) Drilled hole for press fit: $\varnothing 1,133 / \varnothing 1,158$
Finished hole for press fit: $\varnothing 0,94 / \varnothing 1,09$

09 18 514 7919	3
09 18 514 6919	2
09 18 514 5919	1 (0,76 $\mu\text{m Au}$)
Part number	Performance level

				Dat.	Name		SEK 18 Male Connector Standard 14 poles Press in Short locking levers	Maßstab/ Scale 1,5:1	
			Detail.	12/09/06	PK				All Dim. in mm Orig. Size DIN A 3
			Insp.						
EC00823	16/09/09	PK	Stand.						
33950	13/03/07	PK	HARTING EURL F-95972 Paris				TB 09 18 514 X919	Blatt/ Page 1 / 1	
33803	12/09/06	PK							
Mod.	Dat.	Name							