






E

D


C

B

A

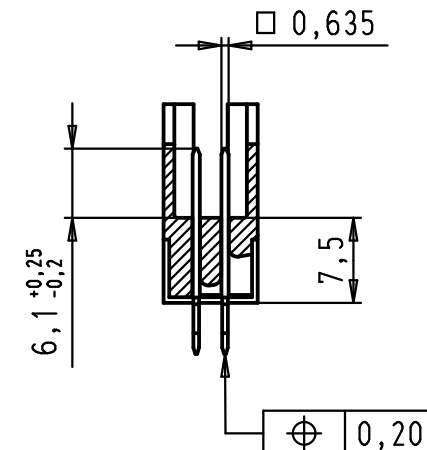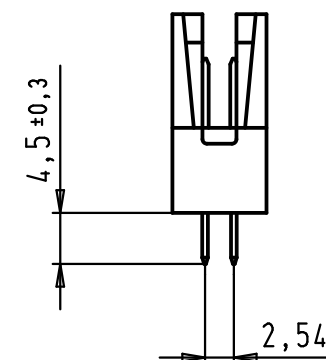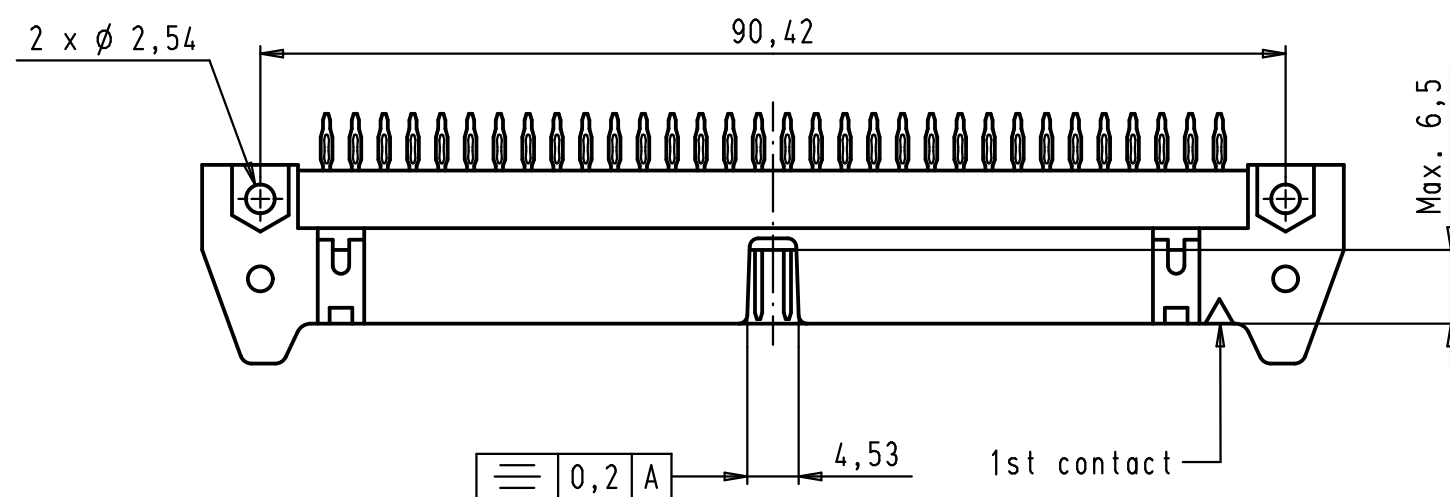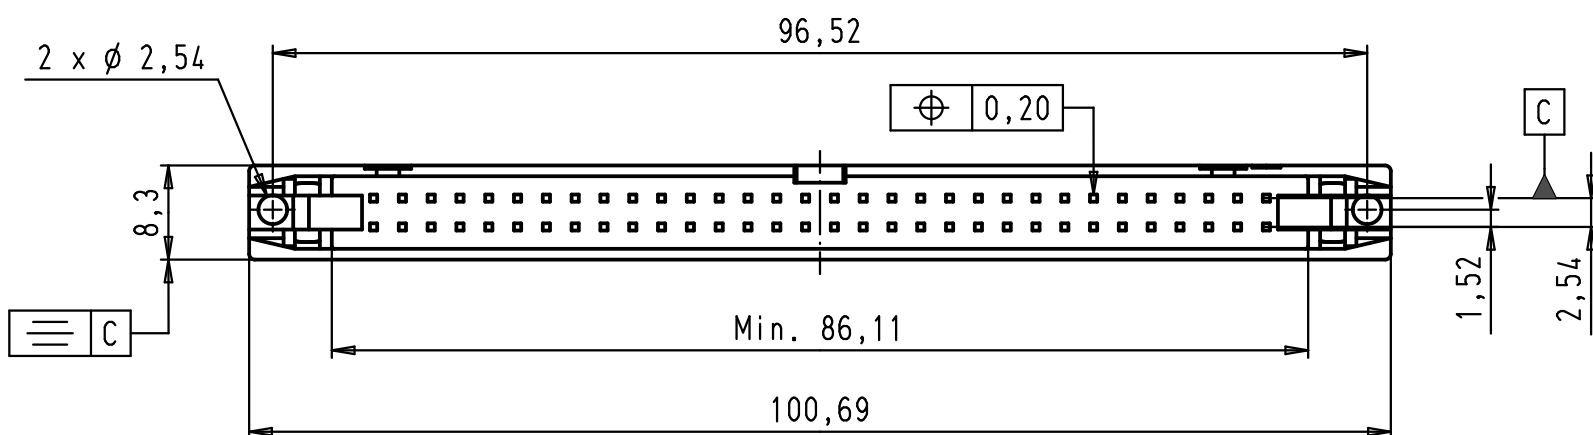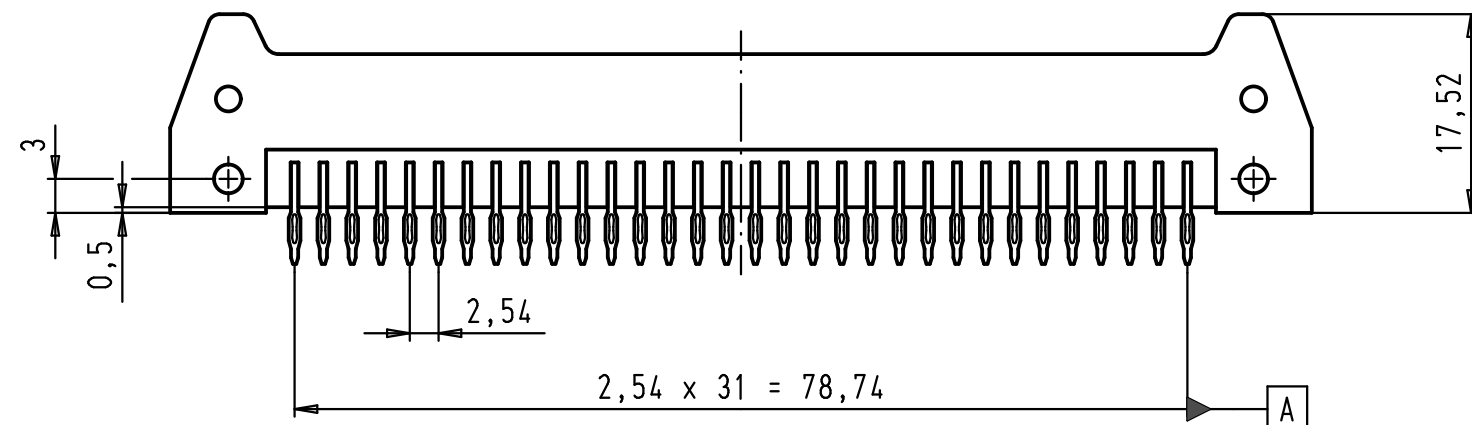


PCB layout, component side

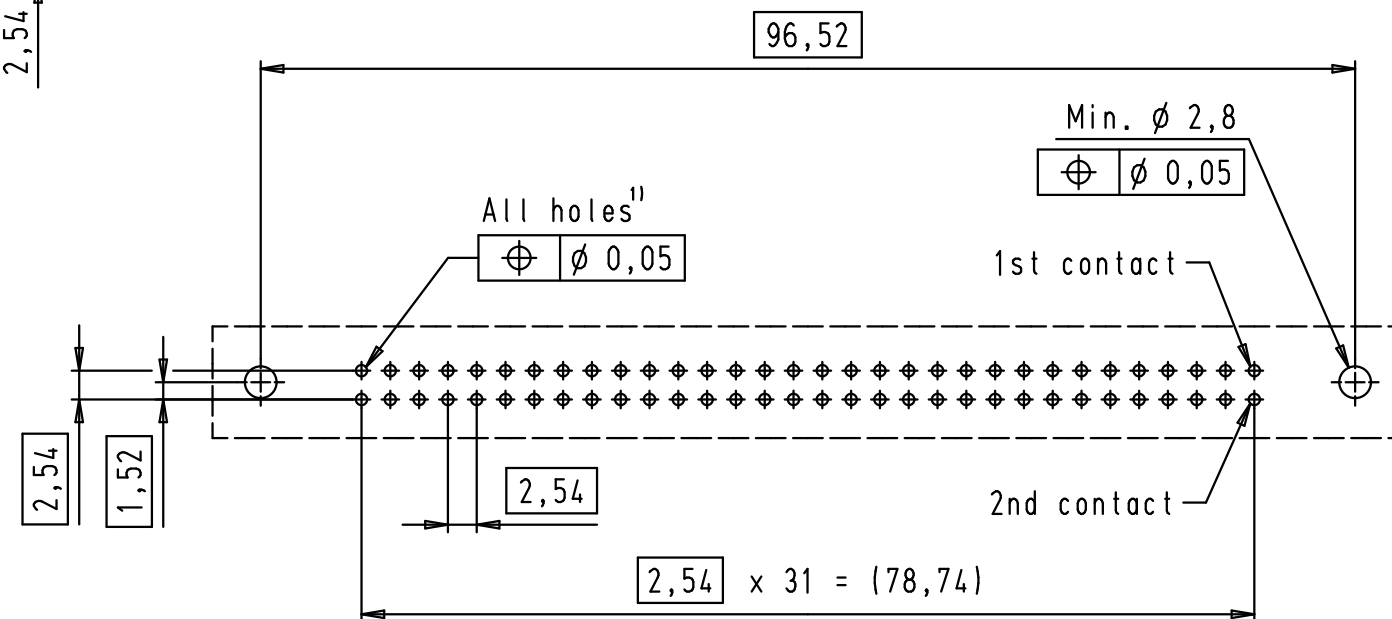

1) Drilled hole for press fit: $\varnothing 1,133 / \varnothing 1,158$
Finished hole for press fit: $\varnothing 0,94 / \varnothing 1,09$

09 18 564 7929	3
09 18 564 6929	2
09 18 564 5929	1 (0,76 μm Au)
Part number	Performance level

				Det.	Name	 All Dim. in mm Orig. Size DIN A 3	SEK 18 Male Connector Standard 64 poles Press in Without locking levers	Maßstab/ Scale 1,5:1	
			Detail.	13/09/06	PK				
			Insp.						
EC00823	16/09/09	PK	Stand.						
33950	16/03/07	PK	HARTING EURL F-95972 Paris					TB 09 18 564 X929	Blatt/ Page 1 / 1
33803	13/09/06	PK							
Mod.	Det.	Name							