


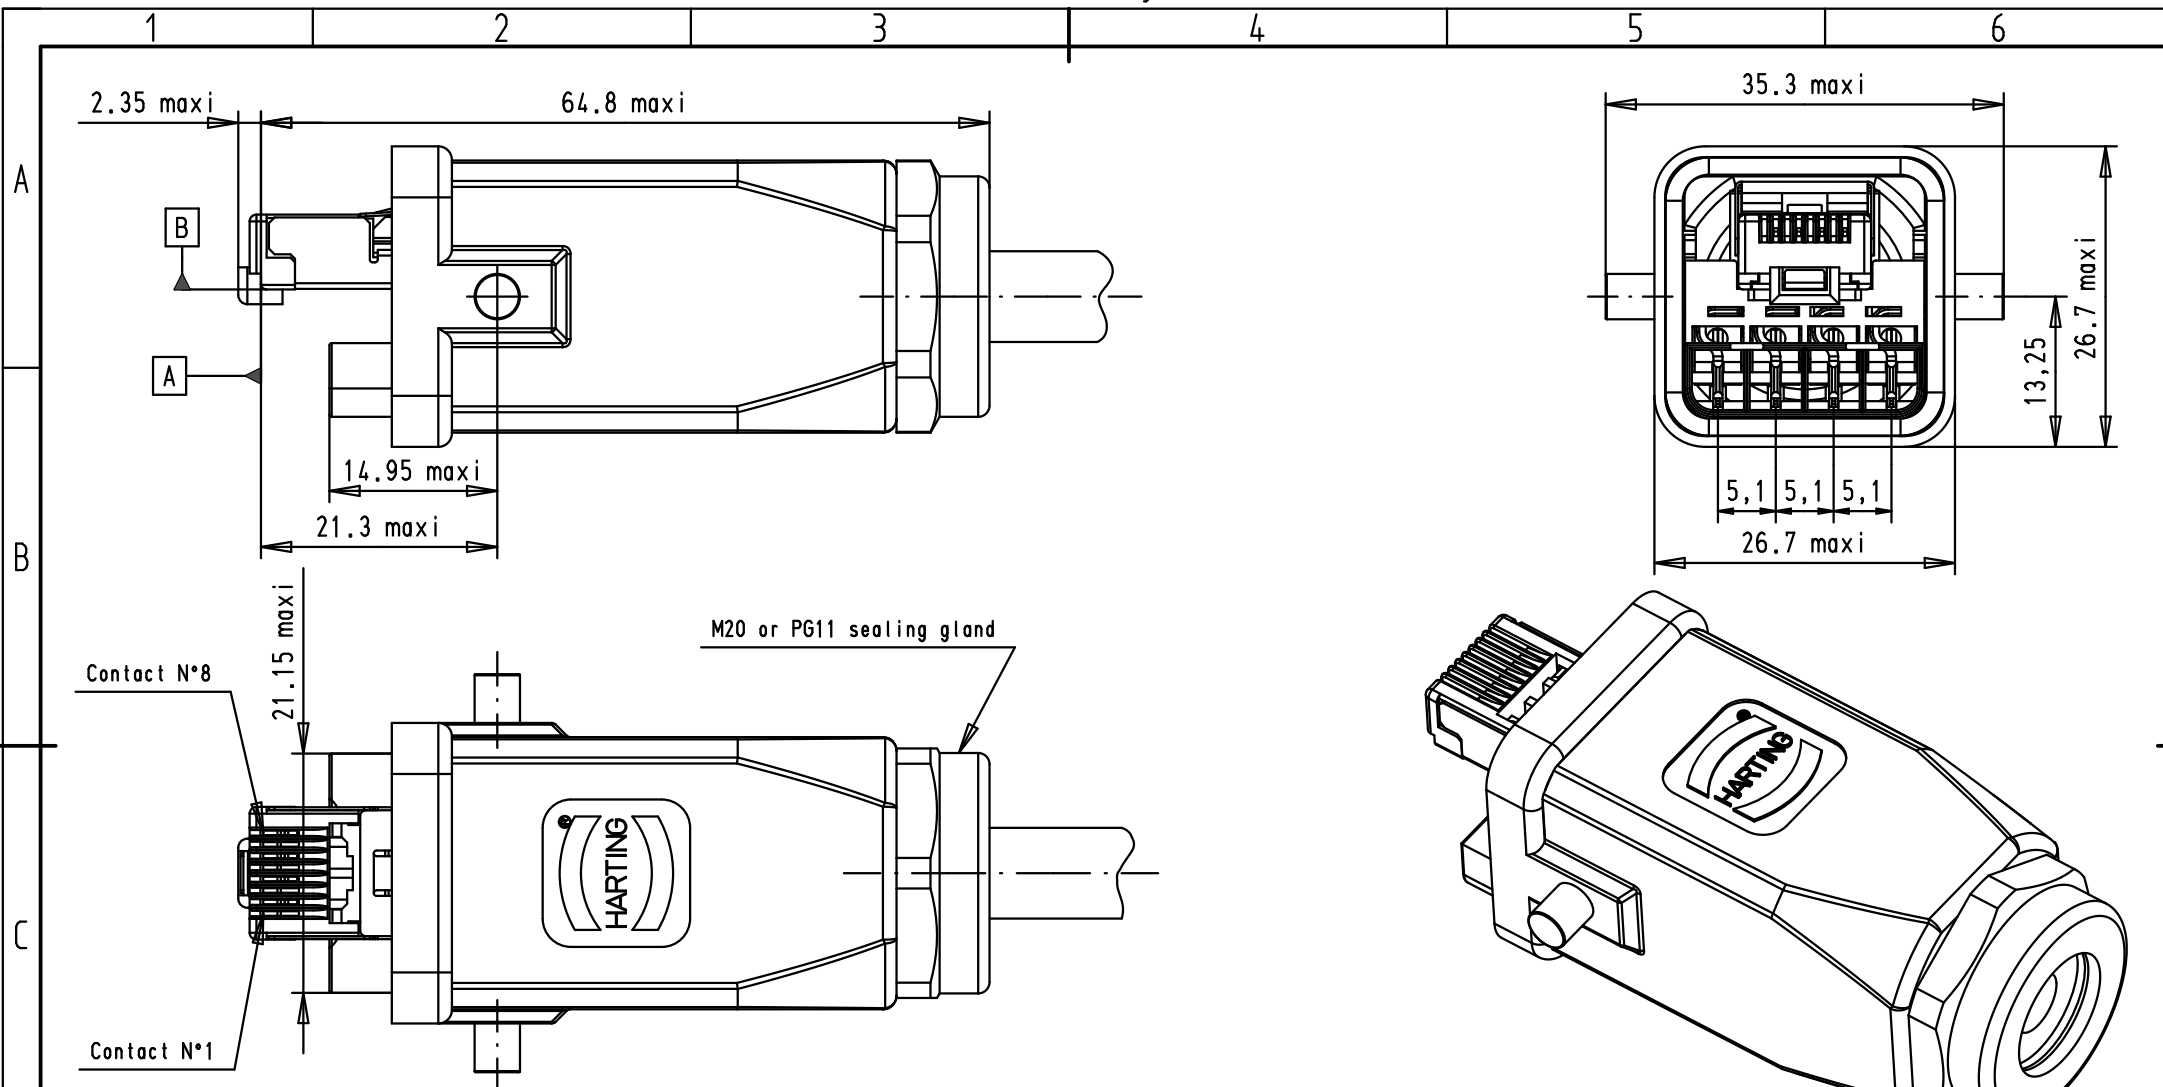

- For solid and stranded conductors AWG 27 up to AWG 22
- Max. wire diameter 1.5mm
- Cable diameter 6 - 12mm
- Degree of protection IP65/IP67
- Cat. 6 performance class EA suitable for 1/10 Gigabit Ethernet
- Temperature range -40°C up to +70°C
- 750 mating cycles

Data contact plating: Au 1.27 μ m (50 μ *) over nickel

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	Han 3A RJ45 Hybrid 10G plug plastic version	Maßstab/ Scale 1,5:1	
			Detail.	21/10/09	AB				
			Insp.						
			Stand.						
			HARTING EURL F-95972 Paris					TB 09 45 125 1760	Blatt/ Page 1 / 1
36080	21/10/09	AB							
Mod.	Dat.	Name					Sub.		