

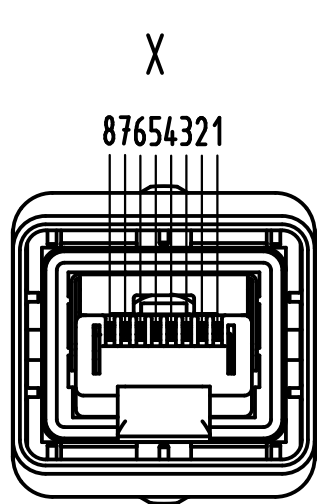
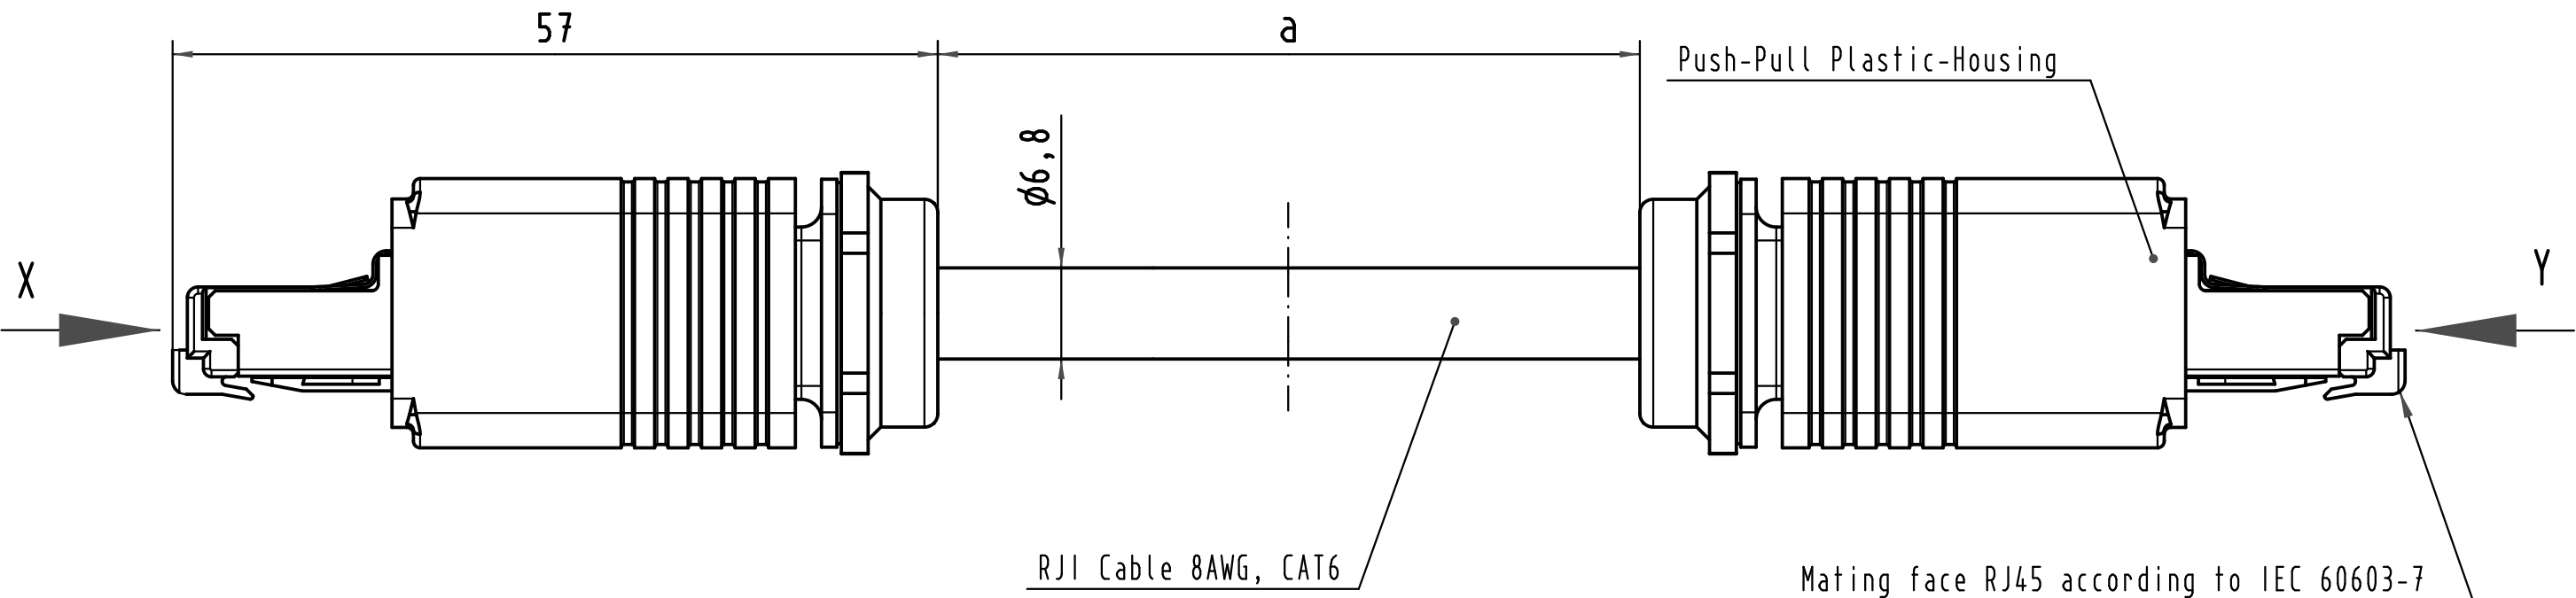


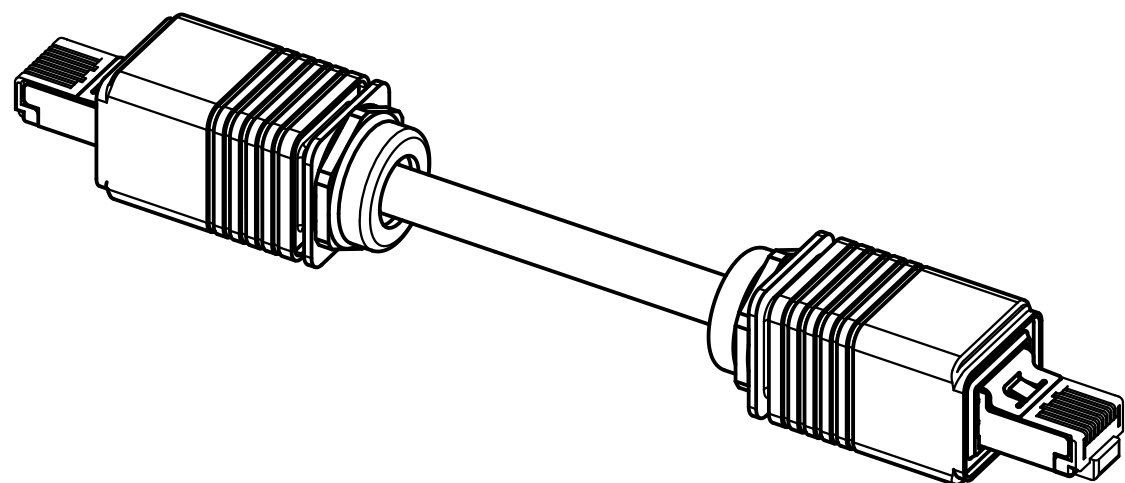


Loading-Plan
Shield

1	White(green)	1
2	Green	2
3	White(orange)	3
4	Blue	4
5	White(blue)	5
6	Orange	6
7	White(brown)	7
8	Brown	8

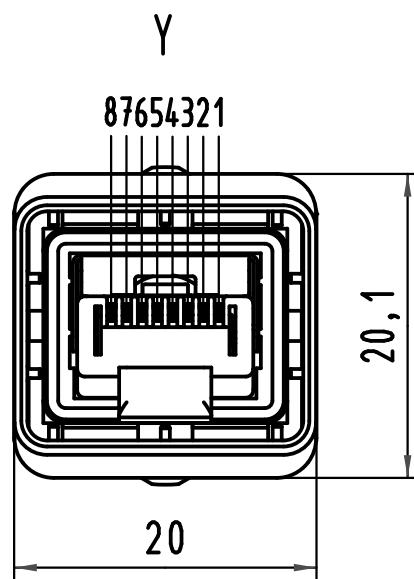

8AWG 27/7 stranded, PUR	09 45 744 1534	20 m
8AWG 27/7 stranded, PUR	09 45 744 1533	15 m
8AWG 27/7 stranded, PUR	09 45 744 1532	10 m
8AWG 27/7 stranded, PUR	09 45 744 1531	9 m
8AWG 27/7 stranded, PUR	09 45 744 1530	8 m
8AWG 27/7 stranded, PUR	09 45 744 1529	7 m
8AWG 27/7 stranded, PUR	09 45 744 1528	6 m
8AWG 27/7 stranded, PUR	09 45 744 1527	5 m
8AWG 27/7 stranded, PUR	09 45 744 1526	4 m
8AWG 27/7 stranded, PUR	09 45 744 1525	3 m
8AWG 27/7 stranded, PUR	09 45 744 1524	2 m
8AWG 27/7 stranded, PUR	09 45 744 1523	1,5 m
8AWG 27/7 stranded, PUR	09 45 744 1522	1 m
8AWG 27/7 stranded, PUR	09 45 744 1521	0,5 m
8AWG 28/7 stranded, PVC	09 45 745 1553	20 m
8AWG 28/7 stranded, PVC	09 45 745 1552	15 m
8AWG 28/7 stranded, PVC	09 45 745 1551	10 m
8AWG 28/7 stranded, PVC	09 45 745 1532	0,25m
8AWG 28/7 stranded, PVC	09 45 745 1527	5 m
8AWG 28/7 stranded, PVC	09 45 745 1525	3 m
8AWG 28/7 stranded, PVC	09 45 745 1523	1,5 m
Type of cable	Part-No.	Dim. a

-Transmission properties in accordance
with ISO/IEC 11801:2002: Class E.
-Protection level: IP67/65
-Temperature range: -40°C ...+70°C

 All Dimensions in mm Original Size DIN A 3			Techn. Character.				Nicht tolerierte Maß/ <i>Free size tolerances</i>			
				Dat.	Name	Maßstab/ <i>Scale</i> 2:1	RJ45 cord, 2xRJ45, IP67-Push Pull 8AWG, stranded, CAT6			
			Detail.	08.10.07	MR					
			Insp.							
			Stand.							
35600	17.02.09	MR								
35037	04.11.08	MS	HARTING Electronics GmbH & Co. KG				TB 09 45 74x xxxx			Blatt/ <i>page</i> /
34108			D-32339 ESPELKAMP							
Mod.	Dat.	Name								
						Sub.				