

5

4

3


2

1

D


Mating face according to MIL-C-24308 / DIN 41 652 / CECC 75301-802

4-40 UNC thread


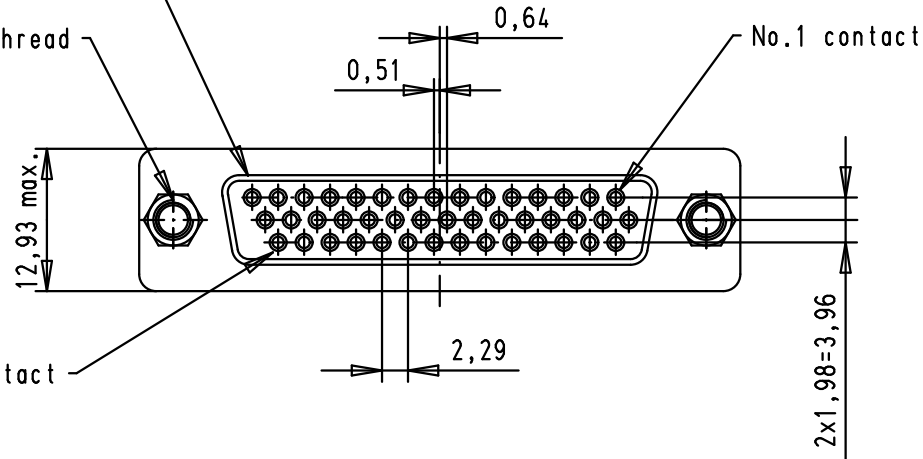


C

Printed board layout, component side  
PCB thickness 1,6mm

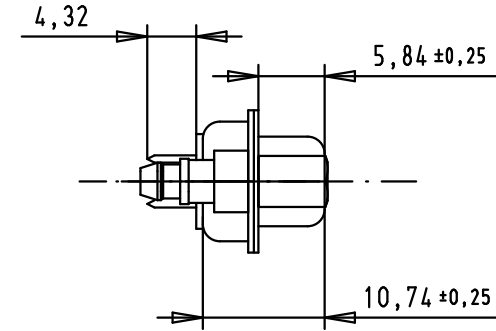

B

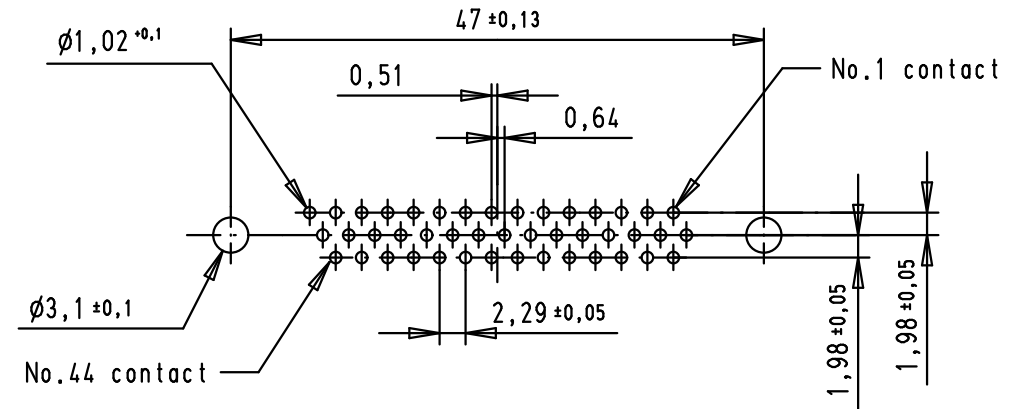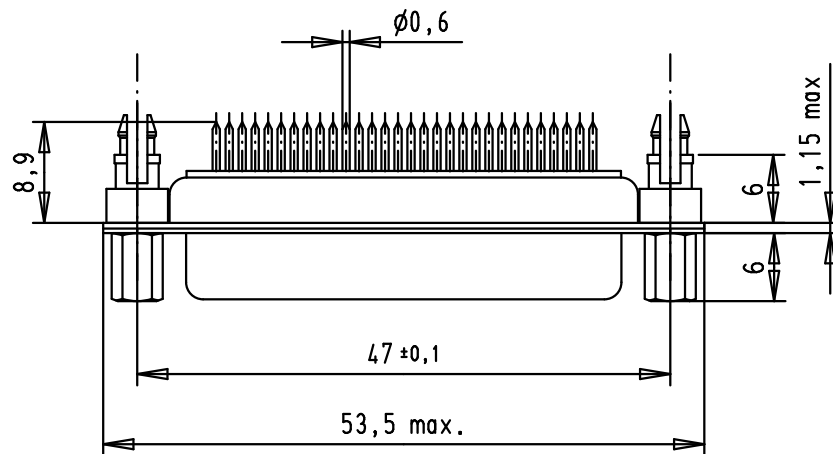

A

|             |                   |
|-------------|-------------------|
|             |                   |
|             |                   |
|             |                   |
| 09563515513 | 0.76 µm Au        |
| 09563517513 | 3                 |
| Part number | Performance level |

|       |          |      |
|-------|----------|------|
|       |          |      |
|       |          |      |
| 36183 | 13/10/10 | BH   |
| 32735 | 18/03/05 | AL   |
| 32326 | 03/01/05 | TR   |
| 31503 | 03-06-03 | S.H. |
| Mod.  | Dat.     | Name |

|                               |          |      |
|-------------------------------|----------|------|
|                               | Dat.     | Name |
| Detail.                       | 03-06-03 | S.H. |
| Insp.                         |          |      |
| Stand.                        |          |      |
| HARTING EURL<br>F-95972 Paris |          |      |



|                                                                             |  |                    |
|-----------------------------------------------------------------------------|--|--------------------|
| Dsub, 44 poles, female,<br>straight solder pins,<br>board locks screw locks |  | Maßstab/<br>Scale  |
| TB 0956351x513                                                              |  | 1.5:1              |
| Sub.                                                                        |  | Blatt/ Page<br>1/1 |