

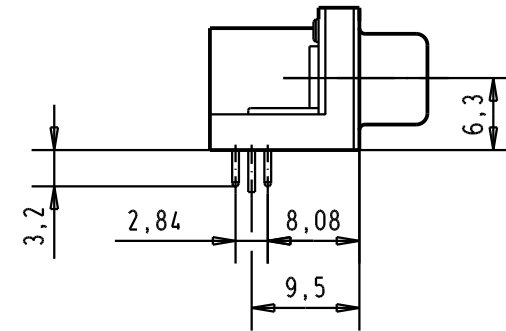
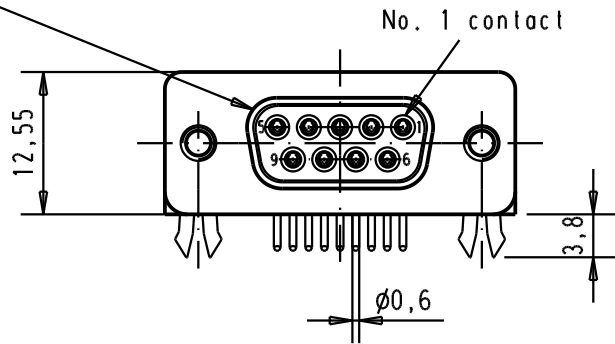


Mating face according to MIL-C-24308 / DIN 41 652 / CECC 75301-802

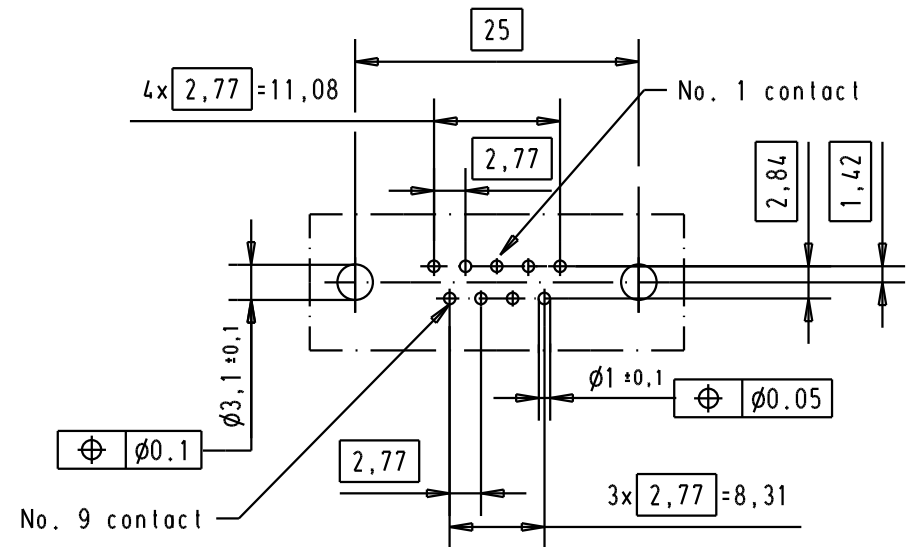

Printed board layout (1,6±0,2 thick)
View component side

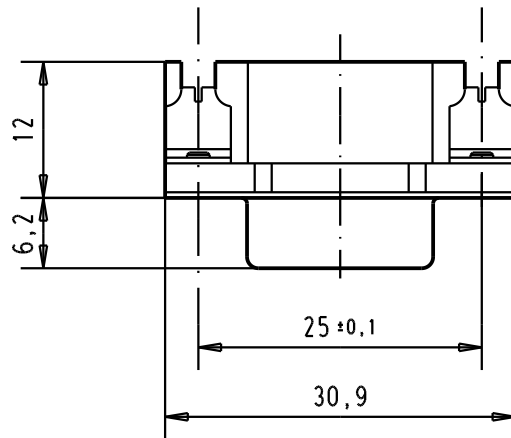

Connector insertion force on PCB = maxi 80 N

A

							Dat.	Name			
							Detail.	28-FEB-02	CV		
							Insp.				
							Stand.				
09 68 153 7611	M3	3									
09 68 153 5611	M3	0,76 um Au									
09 68 153 7612	4-40 UNC	3	32121	28-JUN-04	TR						
09 68 153 5612	4-40 UNC	0,76 um Au	29751	28-FEB-01	CV						
Part number	nut thread	Performance level	Mod.	Dat.	Name						



All Dim. in mm
Orig. Size DIN A 4

D-Sub female connector,
US Footprint, 9 poles
with solder pins, nuts
and grounding board lock

Maßstab/
Scale

1,5:1



HARTING EURL
F-95972 Paris

TB 09 68 153 X61X

Sub.

Blatt / Page

1