

5







4

3

2

1

(1:1)

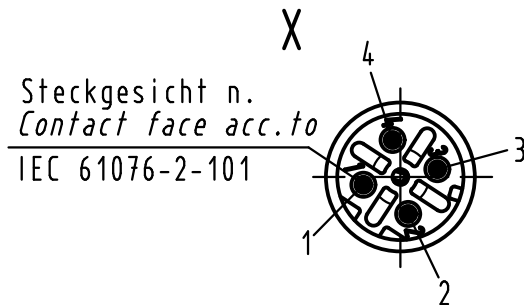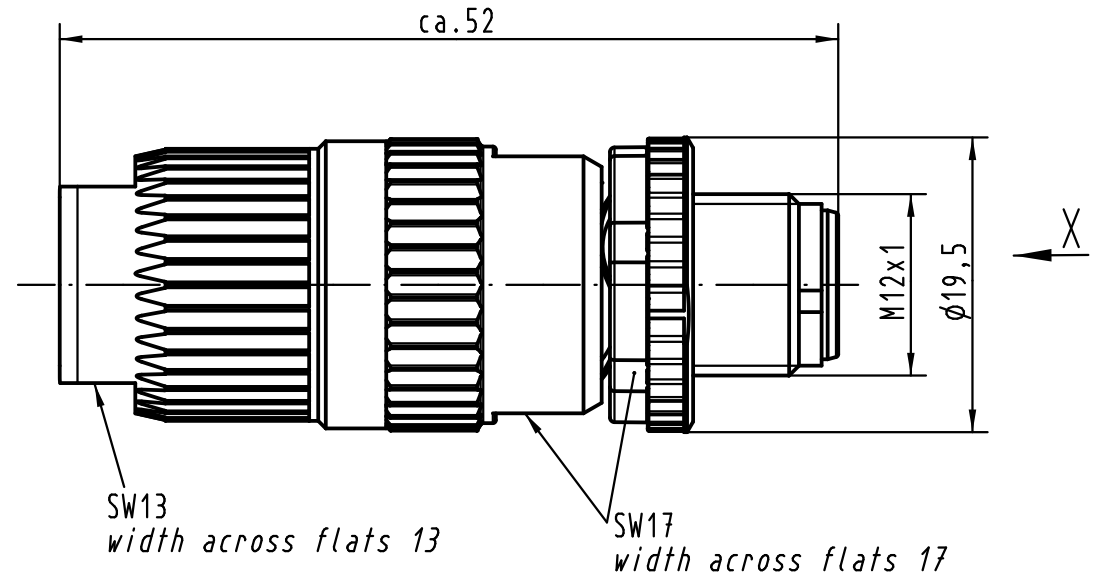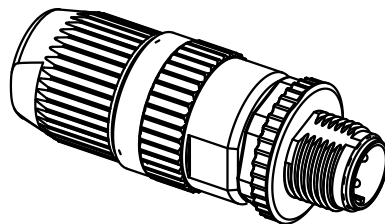

Mod.	Dat.	Name
EC01527	01.07.11	DY
413867	13.05.08	DY
412800	19.03.07	DY
411606	08.08.05	DY
410925	10.03.04	DY

Techn. Character.

Detail.

Dat.

Name

Maßstab/Scale

2:1

HARTING Electronics GmbH & Co. KG
D-32339 ESPELKAMP



Leiterquerschnitt conductor cross section	0,14 - 0,34mm ² AWG26-AWG22
Kabeldurchmesser cable outside diameter	4,5 - 8,8mm

Nicht tolerierte Maße/Free size tolerances

M12-L
RSV geschirmt, 4-polig, Stift, D-kodiert
Circular connector shielded,
4-pole, male, D-coded

TB 21 03 281 1405	Blatt/ page
Sub.	