


Alle Rechte vorbehalten/ All rights reserved

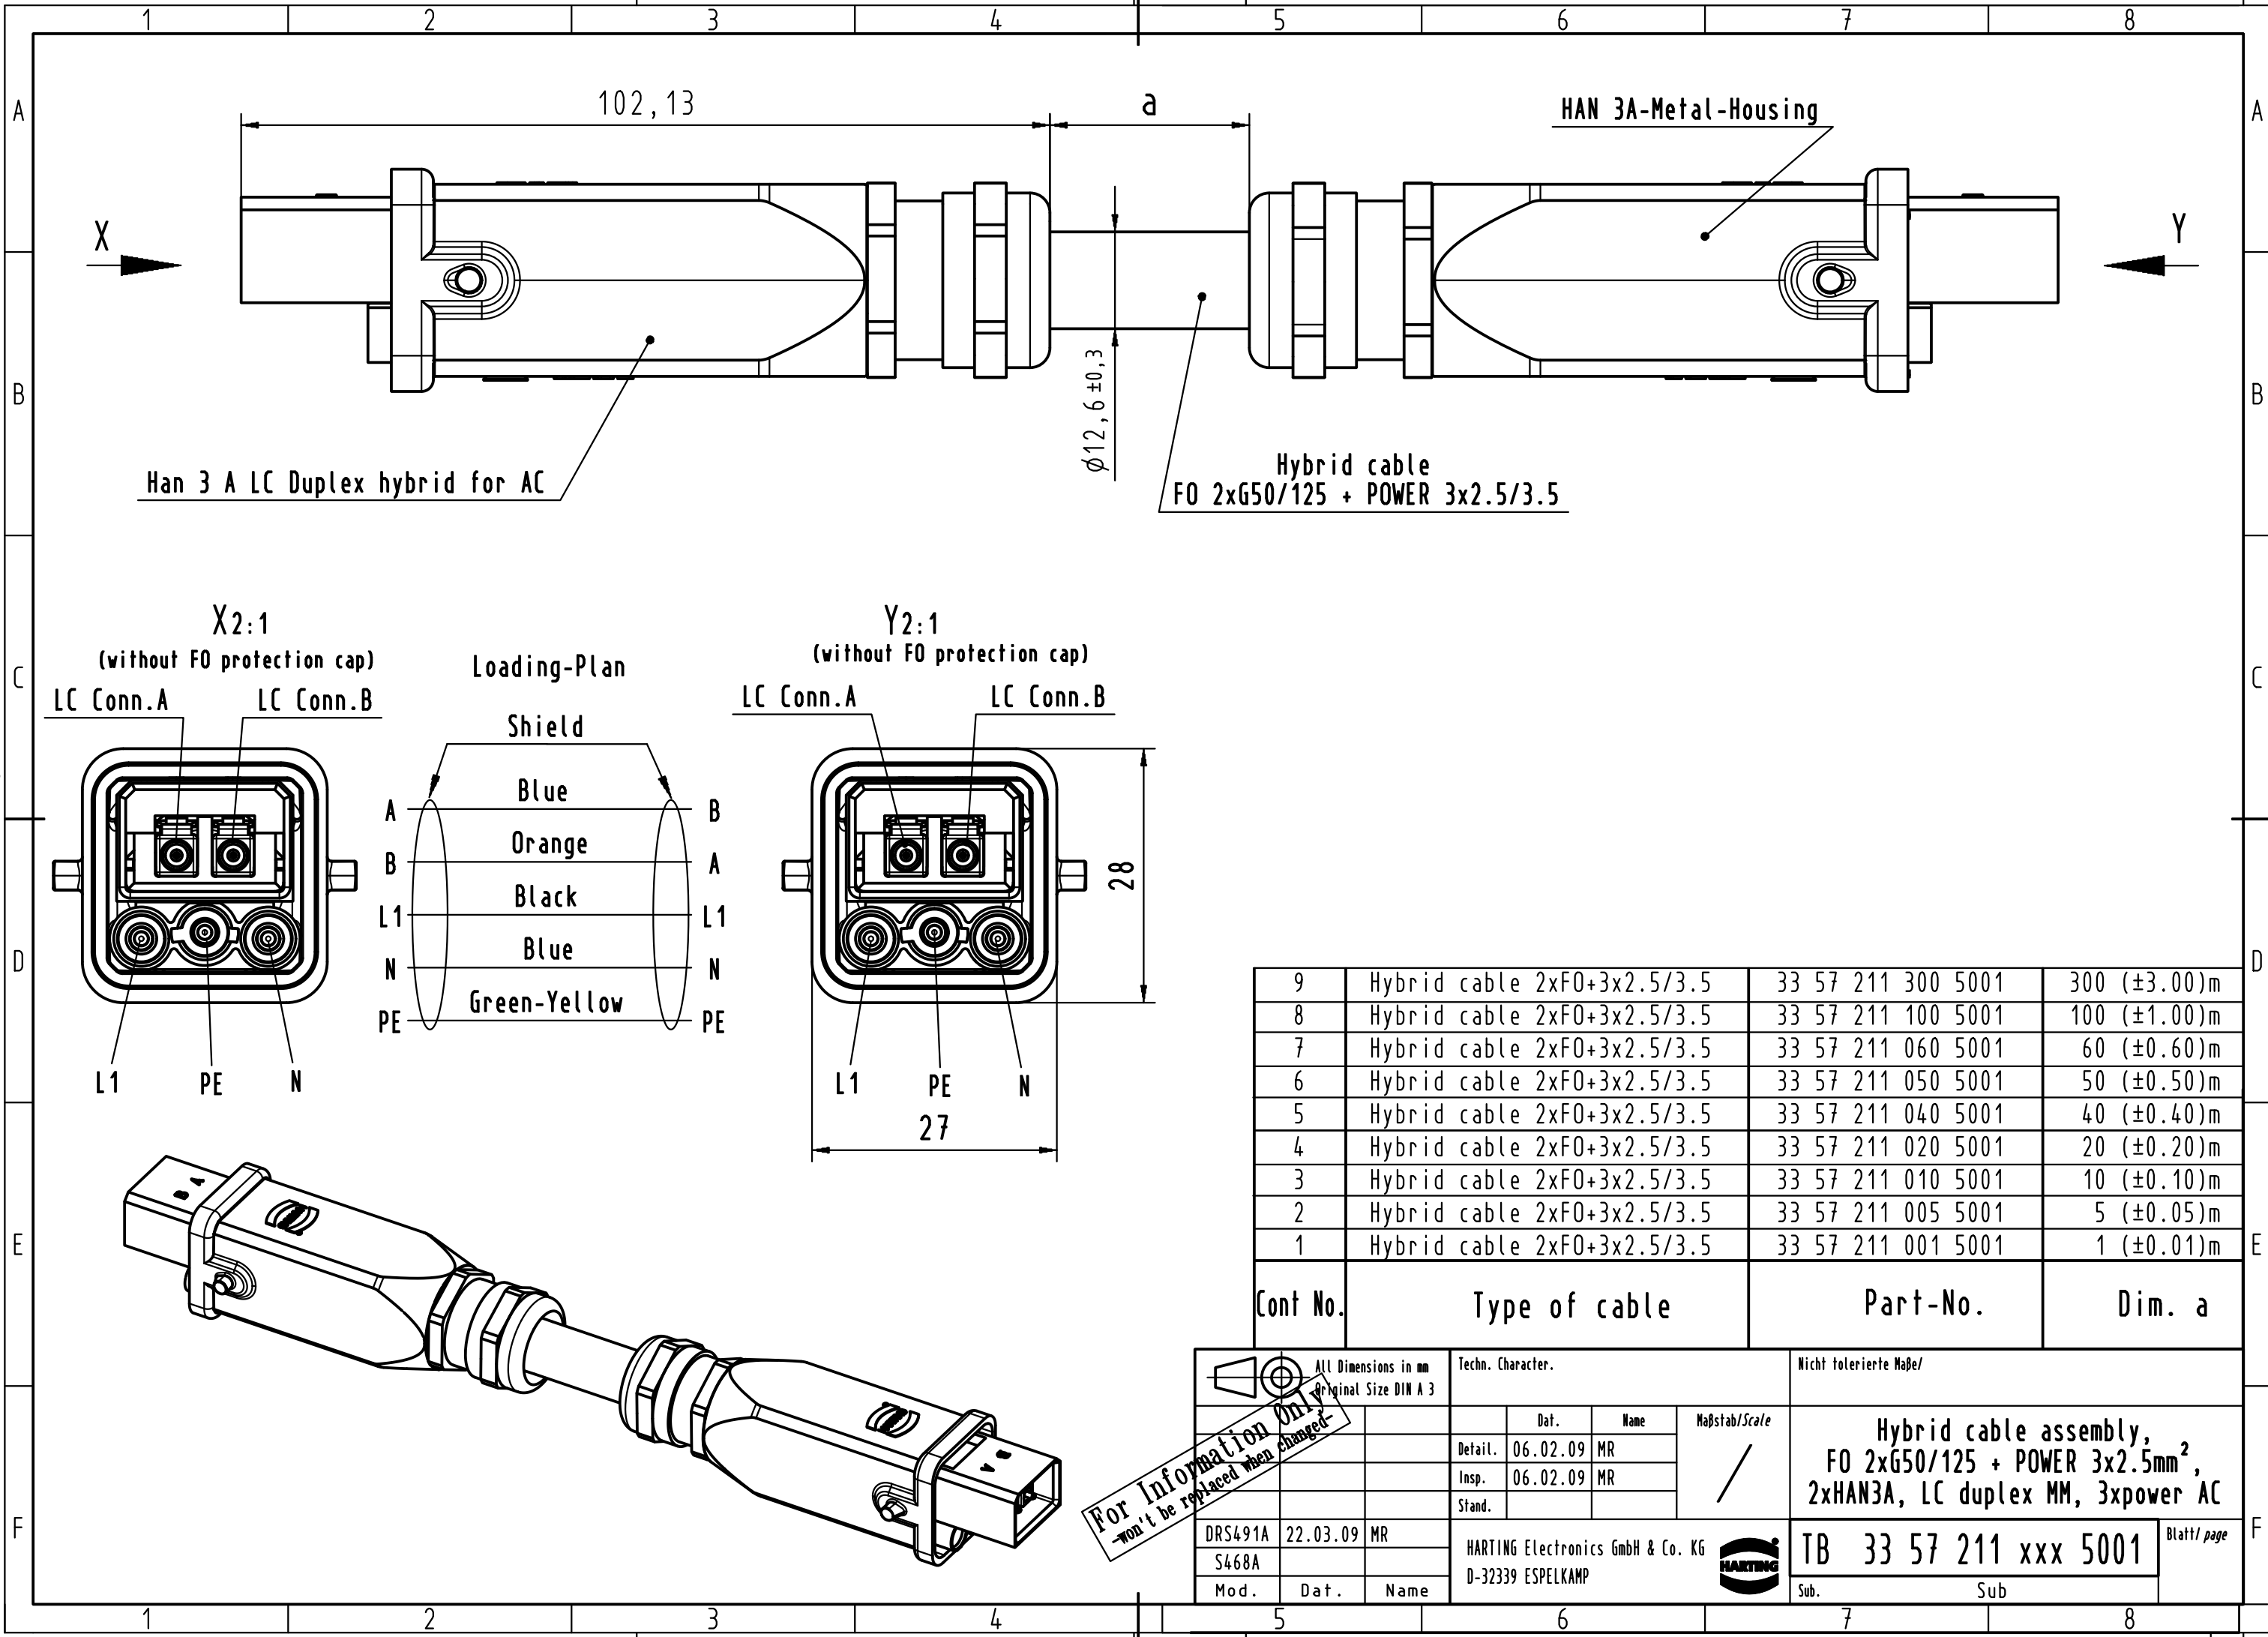

9	Hybrid cable 2xFO+3x2.5/3.5	33 57 211 300 5001	300 (±3.00)m
8	Hybrid cable 2xFO+3x2.5/3.5	33 57 211 100 5001	100 (±1.00)m
7	Hybrid cable 2xFO+3x2.5/3.5	33 57 211 060 5001	60 (±0.60)m
6	Hybrid cable 2xFO+3x2.5/3.5	33 57 211 050 5001	50 (±0.50)m
5	Hybrid cable 2xFO+3x2.5/3.5	33 57 211 040 5001	40 (±0.40)m
4	Hybrid cable 2xFO+3x2.5/3.5	33 57 211 020 5001	20 (±0.20)m
3	Hybrid cable 2xFO+3x2.5/3.5	33 57 211 010 5001	10 (±0.10)m
2	Hybrid cable 2xFO+3x2.5/3.5	33 57 211 005 5001	5 (±0.05)m
1	Hybrid cable 2xFO+3x2.5/3.5	33 57 211 001 5001	1 (±0.01)m

Cont No.	Type of cable	Part-No.	Dim. a
----------	---------------	----------	--------

 All Dimensions in mm Original Size DIN A 3			Techn. Character.				Nicht tolerierte Maße/	
Information only replaced when changed				Dat.	Name	Maßstab/Scale /	Hybrid cable assembly, FO 2xG50/125 + POWER 3x2.5mm ² , 2xHAN3A, LC duplex MM, 3xpower AC	
			Detail.	06.02.09	MR			
			Insp.	06.02.09	MR			
			Stand.					
DRS491A	22.03.09	MR	HARTING Electronics GmbH & Co. KG				TB 33 57 211 xxx 5001	Blatt/ page
S468A			D-32339 ESPELKAMP					
Mod.	Dat.	Name					Sub.	Sub