


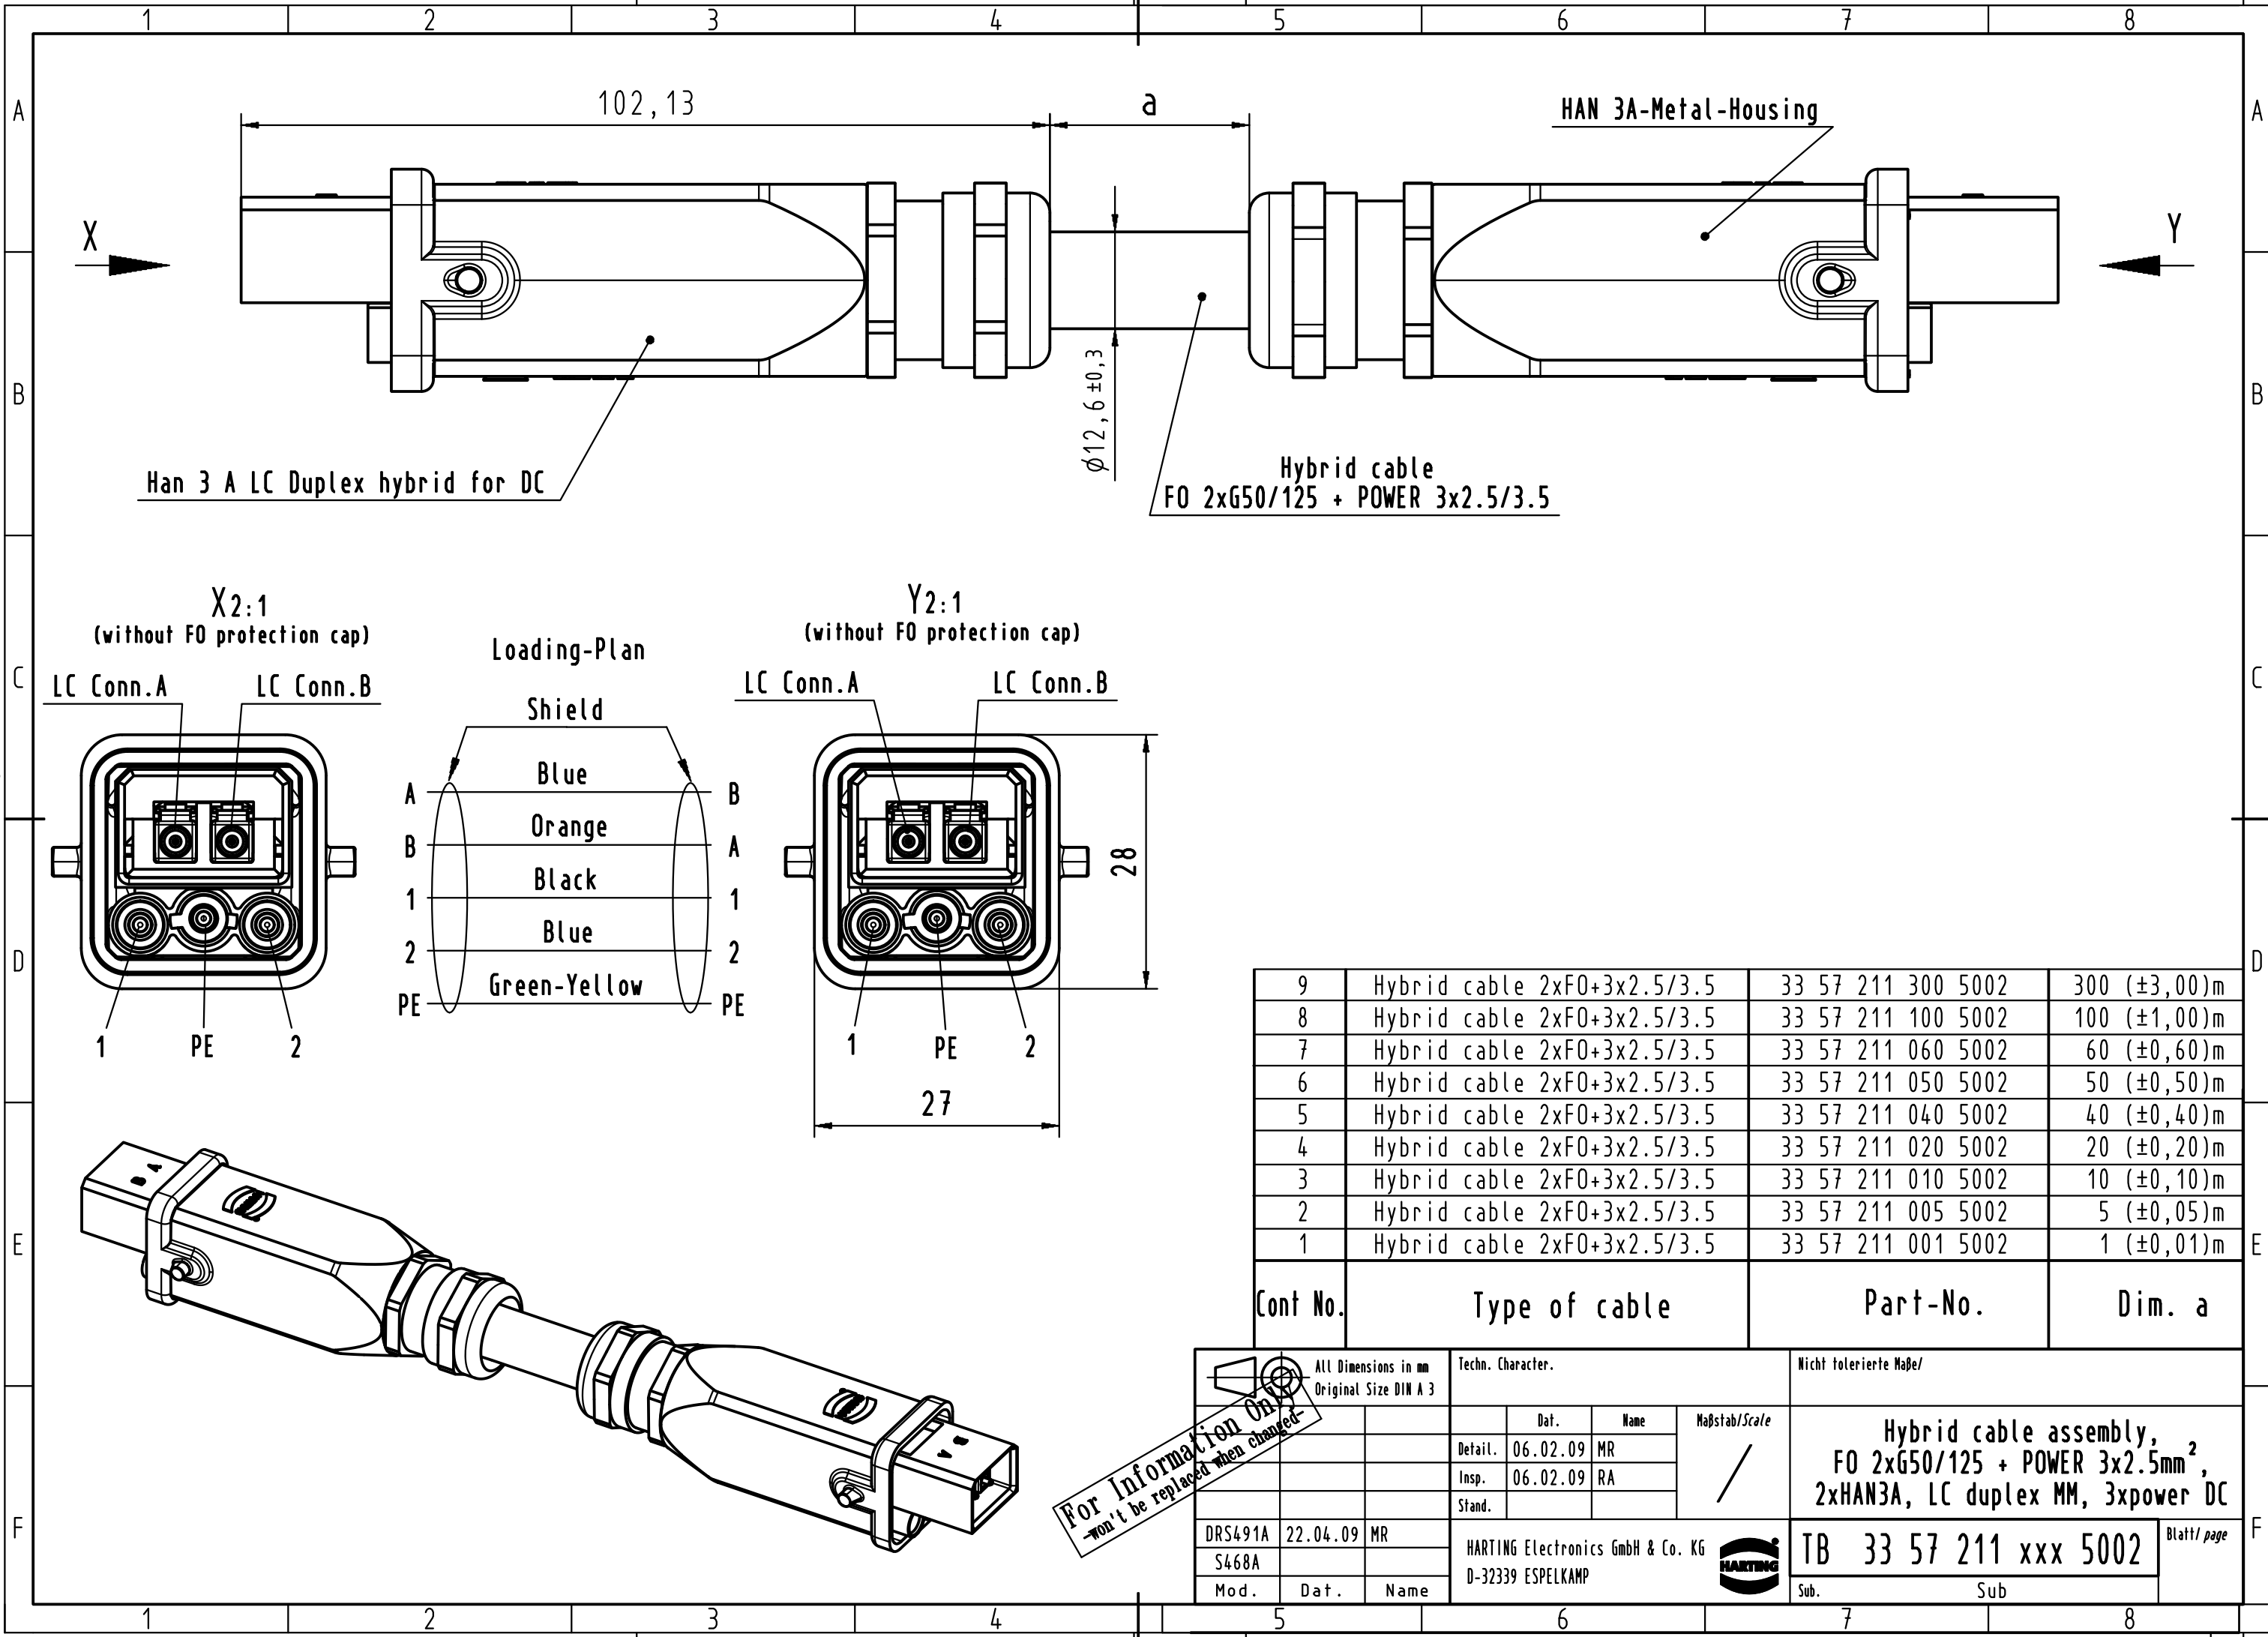

9	Hybrid cable 2xF0+3x2.5/3.5	33 57 211 300 5002	300 (±3,00)m
8	Hybrid cable 2xF0+3x2.5/3.5	33 57 211 100 5002	100 (±1,00)m
7	Hybrid cable 2xF0+3x2.5/3.5	33 57 211 060 5002	60 (±0,60)m
6	Hybrid cable 2xF0+3x2.5/3.5	33 57 211 050 5002	50 (±0,50)m
5	Hybrid cable 2xF0+3x2.5/3.5	33 57 211 040 5002	40 (±0,40)m
4	Hybrid cable 2xF0+3x2.5/3.5	33 57 211 020 5002	20 (±0,20)m
3	Hybrid cable 2xF0+3x2.5/3.5	33 57 211 010 5002	10 (±0,10)m
2	Hybrid cable 2xF0+3x2.5/3.5	33 57 211 005 5002	5 (±0,05)m
1	Hybrid cable 2xF0+3x2.5/3.5	33 57 211 001 5002	1 (±0,01)m

Cont No.	Type of cable	Part-No.	Dim. a
----------	---------------	----------	--------

 ALL Dimensions in mm Original Size DIN A 3			Techn. Character.				Nicht tolerierte Maße/		
Information Only placed when changed				Dat.	Name	Maßstab/Scale /			
			Detail.	06.02.09	MR				
			Insp.	06.02.09	RA				
			Stand.						
							Hybrid cable assembly, FO 2xG50/125 + POWER 3x2.5mm ² , 2xHAN3A, LC duplex MM, 3xpower DC		
DRS491A	22.04.09	MR	HARTING Electronics GmbH & Co. KG				TB 33 57 211 xxx 5002		
S468A			D-32339 ESPELKAMP						
Mod.	Dat.	Name					Blatt/ page		
							Sub. Sub		

For Information Only
won't be replaced when changed

