




(1,27 mm) .050"

TFM, TFML SERIES

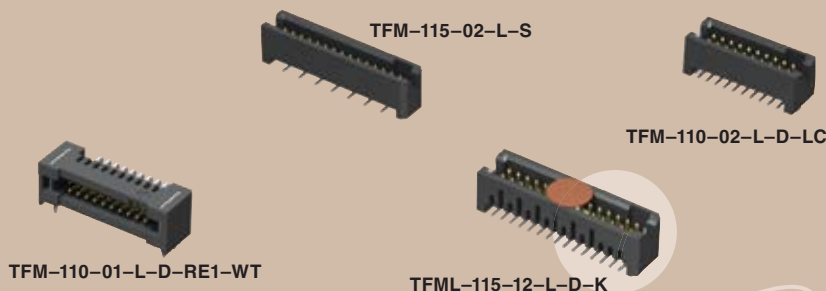

SMT & THROUGH-HOLE HEADER

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?TFM or www.samtec.com?TFML

Insulator Material:

Black Liquid

Crystal Polymer Terminal Material

Terminal Material

Phosphor Bronze

Phosphor Bronze
Plating:
Au or Sn over 50μ" (1.27 μm) Ni

Voltage Rating:

350 VAC mated with SFM

Operating Temp F
55°C to 125°C

-55°C to +125°C
RoHS Compliant

RoH
Yes

CURRENT RATING (PER CONTACT)	
AMBIENT TEMP	TFM/SFM
20°C	5A
40°C	4.5A
60°C	3.9A
95°C	2.6A

Processing:

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0,10 mm) .004" max (05-25)
(0,15 mm) .006" max (30-50)

MATED HEIGHT


LEAD STYLE		MATED HEIGHT*
TFM	SFM	
-02	-02	(6.35) .250
-12		(8.13) .320
-22		(9.91) .390
-32		(11.81) .465
LEAD STYLE		MATED HEIGHT*
TFM	SFM	
-01	-01	(5.97) .235
-03		(5.97) .235
-11		(7.75) .305
-13		(7.75) .305
-21		(9.53) .375
-31		(11.43) .450

*Processing conditions will affect mated height.

TFM Mates with:
SFM, SFMC, SFSD

TFML Mates with:
SFML, SFSD (–XL option),
SFSDT (–XL option)

TFM-DH Mates with:
SFM (-DH), SFMC,
SFSDX (-S, -D, -SR, -DR)

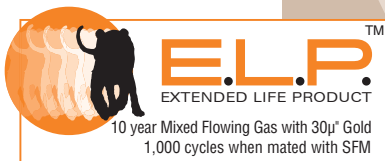


Shrouded body for blind mating


(1,27 mm x 1,27 mm)
 .050" x .050"
 micro pitch

Surface mount or
Through-hole tails

APPLICATIONS



TFM-DH to SFM-DH SHOWN



TFM to SFM-SH SHOWN

TYPE STRIP

1

NO. PINS PER ROW

04, 06, 08

LEAD STYLE

Specify LEAD STYLE from chart

PLATING OPTION

-L

TFM
= Standard

TFML
= Locking

04, 06, 08
(TFM only)

05, 07, 10, 15, 20, 25, 30, 35, 40, 45, 50
(Call Samtec for other sizes)

Specify LEAD STYLE from chart

COST-SAVING APPLICATIONS
 See TFC Series for lower cost plating options.

-L
= 15μ" (0.38 μm)
Gold on post,
Matte Tin on tail
(Call Samtec for E.L.P. plating option)

Note: Other Gold plating options available.
Contact Samtec.

LEAD STYLE (T/H)	B	C
-01	(5,59) .220	(1,97) .078
-03*	(5,59) .220	(2,77) .109
-11*	(7,37) .290	(1,97) .078
-13*	(7,37) .290	(2,77) .109
-21*	(9,14) .360	(1,97) .078
-31*	(11,05) .435	(1,97) .078

* N/A with 07 or -S row option

SINGLE ROW

DOUBLE ROW

THROUGH-HOLE

SURFACE MOUNT

LEAD STYLE (SMT)	A
-02	(5,72) .225
-12*	(7,49) .295
-22*	(9,27) .365
-32*	(11,18) .440

* N/A with 07, -DH or -S row option



-LC (SMT or TH)

-WT (-01 & -02 ONLY)

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 **SAMTEC NORTHERN CALIFORNIA** • Tel: 408-395-5900 **SAMTEC SOUTHERN CALIFORNIA** • Tel: 1-800-726-8329
SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 **SAMTEC UNITED KINGDOM** • Tel: +44 1236 739292 **SAMTEC GERMANY** • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: 33 01 60 95 06 60 **SAMTEC ITALY** • Tel: 39 039 6890337 **SAMTEC NORDIC/BALTIC** • Tel: +46-84477280 **SAMTEC BENELUX** • Tel: +44 1236 739292
SAMTEC ISRAEL • Tel: 972-3-7526060 **SAMTEC INDIA** • Tel: +91-80-3272 1612 **SAMTEC ASIA PACIFIC** • Tel: 65 6745-5955 **SAMTEC JAPAN** • Tel: 045-475-1385 **SAMTEC CHINA** • Tel: 86-21-6083 3766
SAMTEC TAIWAN • Tel: 886-2-2735-6109 **SAMTEC HONG KONG** • Tel: 852-26904858 **SAMTEC KOREA** • Tel: 82-31-717-5685 **SAMTEC ANZ** • Tel: 613 9580 0683

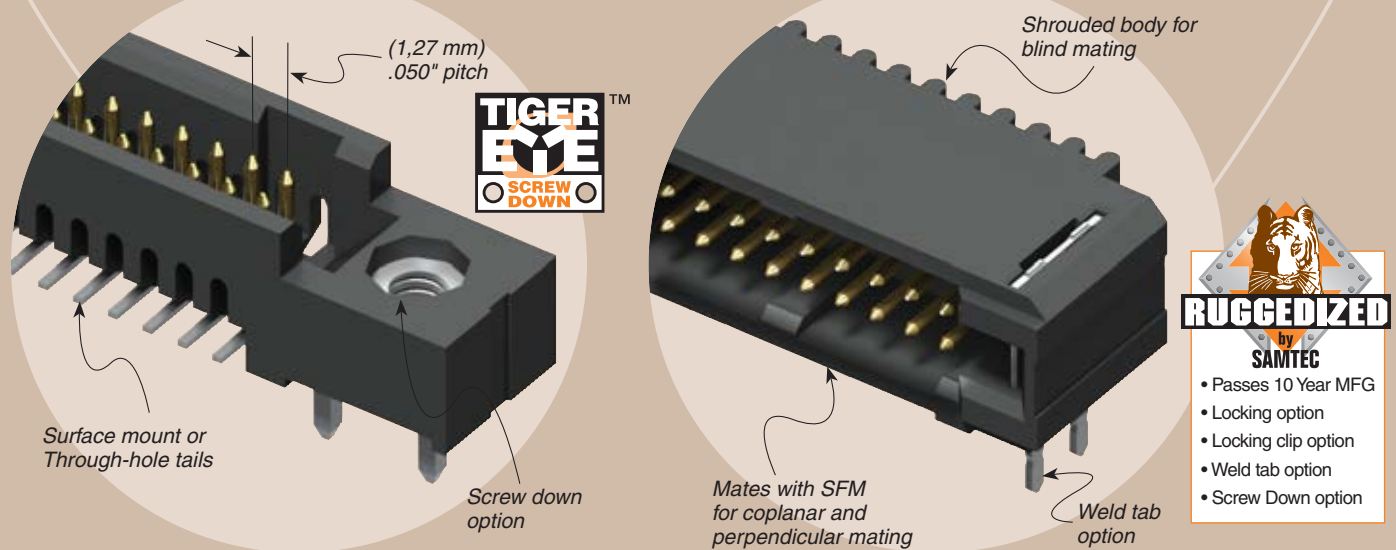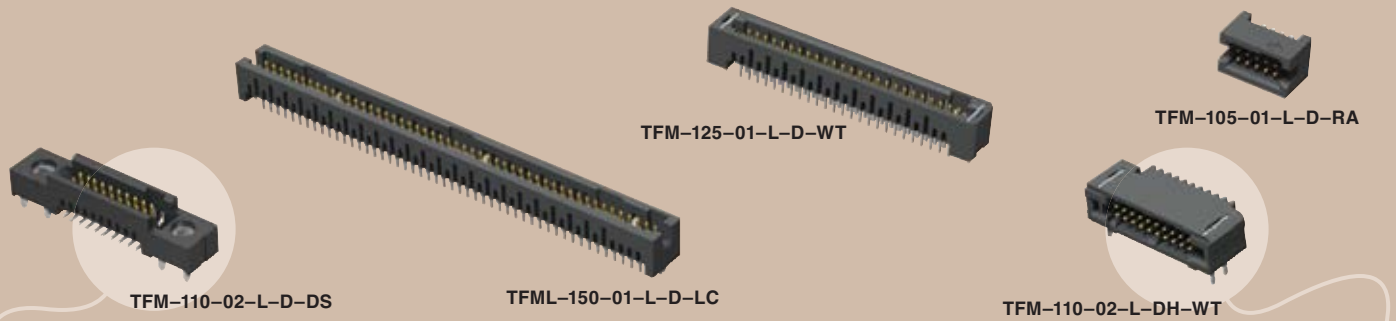

ROW OPTION

-S



= Single Row
(TFM only)

-D

= Double Row

-DH

= Double Horizontal
(TFM lead style -02 only)
(05 thru 50 positions only)
(-WT standard; -TR option only available)



(-D, -01 & -02 ONLY)

Specify only -RA, -RE1 or -RE2

-RA



= Right Angle
(Lead style -01 only)

-RE1

= Right Angle Elevated for (1,58 mm) .062" PCB
(Requires TFM lead style -01, -D row and -WT)

-RE2

= Right Angle Elevated for (2,36 mm) .093" PCB
(Requires TFM lead style -01, -D row and -WT)



OPTION

Specify only -A, -LC, -DS or -WT
Not available with -RA, -RE1 and -RE2 unless otherwise noted.

-A

= Alignment Pin

-LC

= Locking Clip
(Manual Placement required)

-DS

= Dual Screw Down for
(1,60 mm) .062" PCB
(05, 07, 10, 15, 20, 25, 30, 35, 40 positions only)
(TFM lead styles -01 and -02 only)
(Requires -D row option)
(Mates with SFM-DS option and SFSD/SFSDT-SS and -DS option only)

-WT

= Weld Tab
(TFM lead styles -01 and -02 only)
(Standard with -DH)
(Mates to SFSS/SFSD -SR and -DR option only)
(05, 07, 10, 15, 20, 25, 30, 35, 40, 45, 50 positions only)

SMT lead styles only
Specify only -K or -P

-K

= Polyimide Film Pick & Place Pad

-P

= Plastic Pick & Place Pad
(5 positions minimum)

Specify -TR last

-TR

= Tape & Reel
(Not available with -DS)

APPLICATION SPECIFIC OPTION

Solder nail option available.
Call Samtec.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683