


PCB LAYOUT








CIRCUIT DIAGRAM

SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
3-1, 4-6	3-2, 4-5



NOTES:

1. ALL DIMENSIONS IN mm [INCHES]
2. GENERAL TOLERANCE: x.x= ±0.4
x.xx=±.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.1A; 30V
5. CONTACT RESISTANCE: 100 mILLI-OHMS MAX.
6. TIMING: NON-SHORTING
7. TRAVEL: FULL 2.5mm, LOCK 1.5mm
- ▲8. OPERATING FORCE: 180 ± 50gf
9. ELECTRICAL LIFE: 10,000 CYCLES MAKE AND BREAK
CYCLES AT FULL LOAD
10. ▲DENOTE CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT

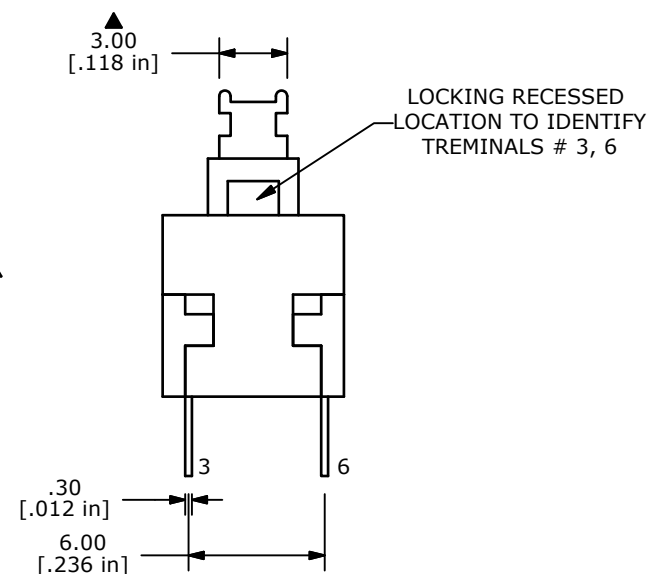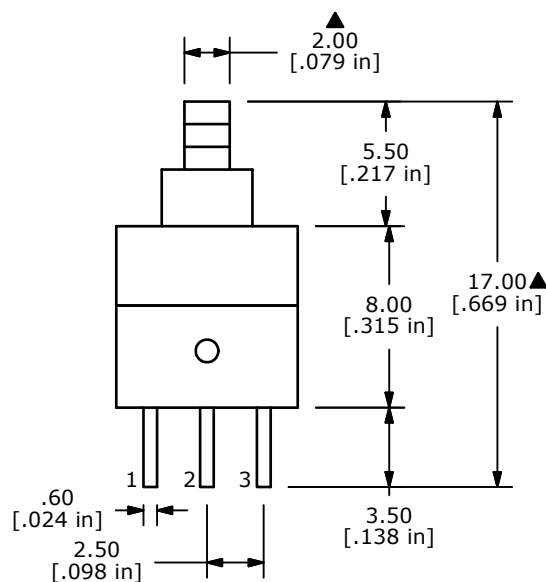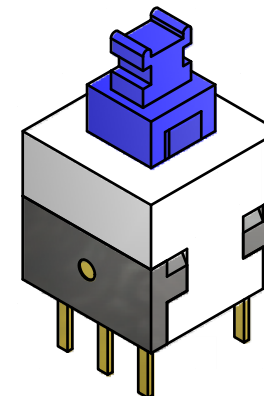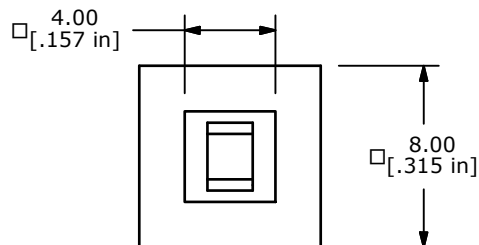

TITLE TL2285EE

SCALE 3:1

DATE 2/1/2011

DR BGL

DWG P010451

REV D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED