


PCB LAYOUT



CIRCUIT DIAGRAM





SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
3-1, 4-6	3-2, 4-5




(ON) = MOMENTARY

NOTES:

1. ALL DIMENSIONS IN mm [INCHES]
2. GENERAL TOLERANCE: x.x= ± 0.4
x.xx= $\pm .25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.1A; 30V
5. CONTACT RESISTANCE: 100 mILLI-OHMS MAX.
6. TIMING: NON-SHORTING
7. TRAVEL: FULL 2.5mm
- ▲ 8. OPERATING FORCE: 180 ± 50 gf
9. ELECTRICAL LIFE: 10,000 CYCLES MAKE AND BREAK
CYCLES AT FULL LOAD
10. ▲ DENOTE CRITICAL PARAMETER

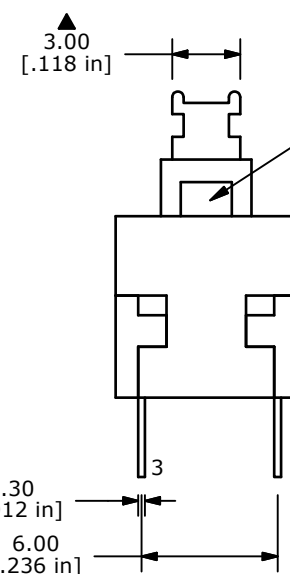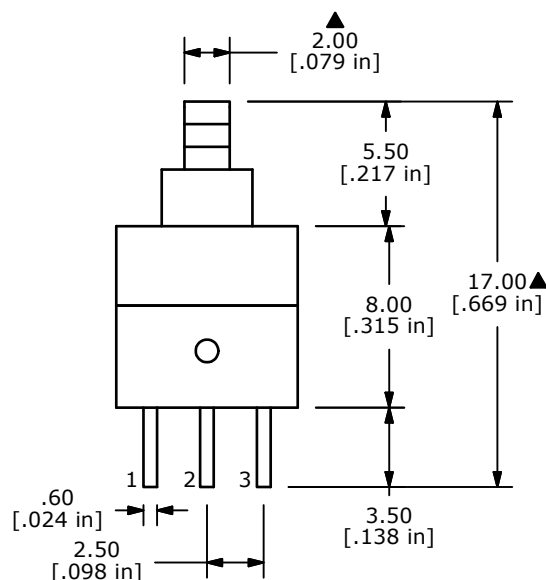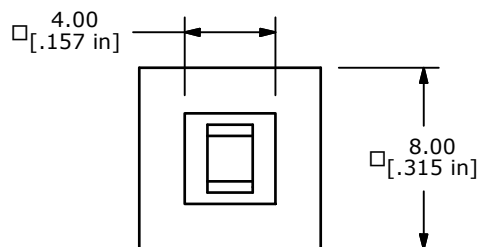

LOCKING RECESSED
LOCATION TO IDENTIFY
TERMINALS # 3, 6

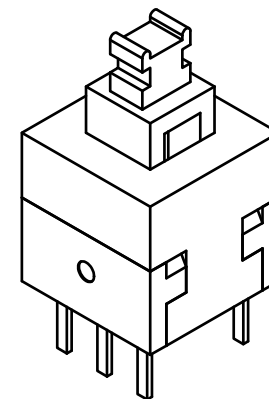

TITLE TL2285OA

SCALE 3:1

DATE 1/31/2011

DR BGL

DWG P010450

REV D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED