





(2,54 mm) .100"

TSF SERIES

TSF-110-02-T-D



TSF-126-02-T-S

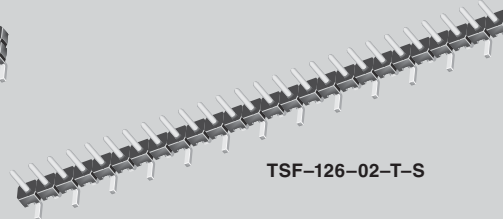

SMT TERMINAL STRIPS

Mates with:

SS, SD, HSS, SL, SDL,
ESS, ESD

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com/?TSF

Insulator Material:

Black Liquid Crystal Polymer

Flammability Rating:

UL 94V-O

Insulation Resistance:

5000 MΩ

Operating Temp Range:

-55°C to +105°C with Tin;

-55°C to +125°C with Gold

Dielectric

Withstanding Voltage:

600 VAC

Terminal Material:

Phosphor Bronze

Plating:

Au or Sn over

50μ" (1,27 mm) Ni

Current Rating:

1A per contact

RoHS Compliant:

Yes

Processing:

Lead-Free Solderable:


Wave, or reflow with Matte Sn

Lead Coplanarity:


.006" (0,15 mm) max (2-22)

.008" (0,20 mm) max (23-29)

.010" (0,25 mm) max (30-36)

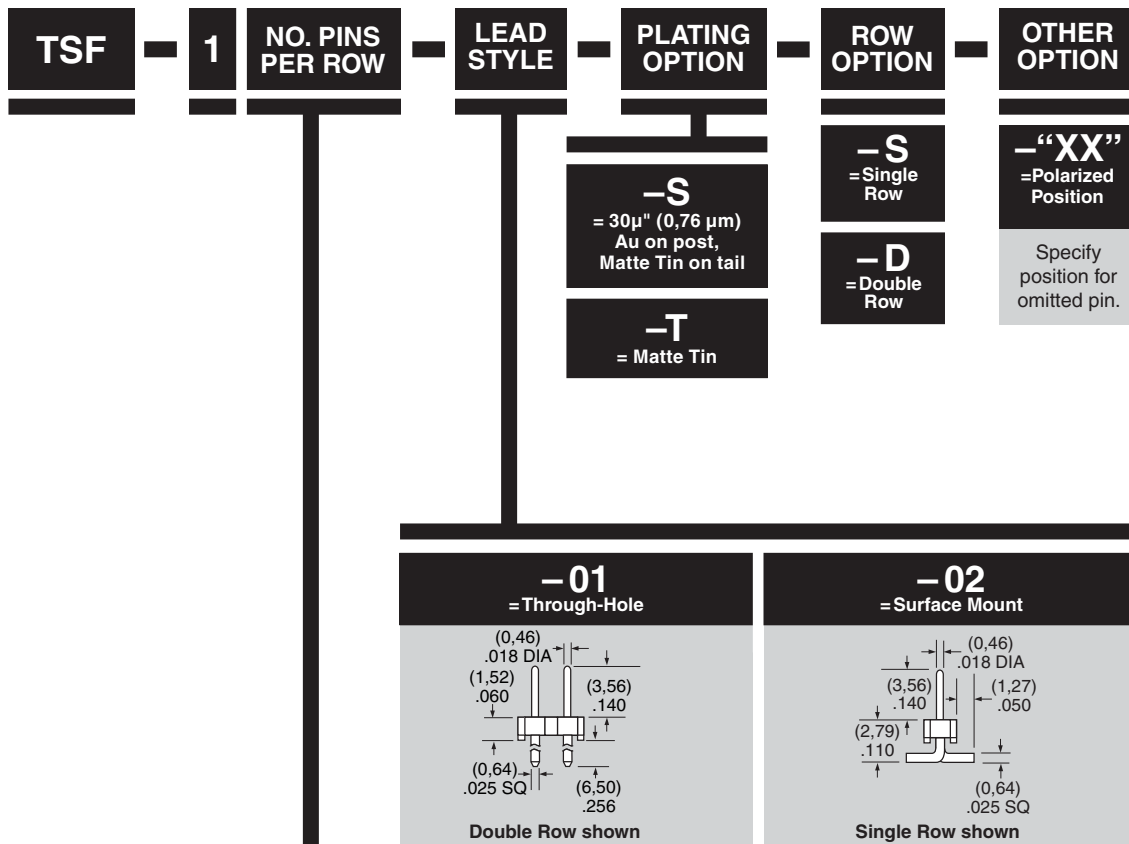


APPLICATIONS



TSF/SL

02 thru 36

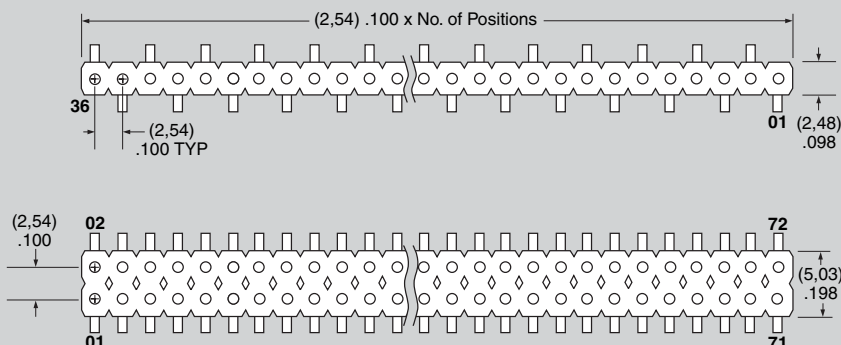

Note:

Some sizes, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
 SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
 SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683