



REV M

DO NOT SCALE
FROM THIS PRINT

IN-PROCESS 1

DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED	TOLERANCES ARE:
ONE PLACE DECIMALS ±.1[2.5]	THREE PLACE DECIMALS ±.005 [13]	ANGLES	± 2°
TWO PLACE DECIMALS ±.01[.3]	FOUR PLACE DECIMALS ±.002 [.05]		

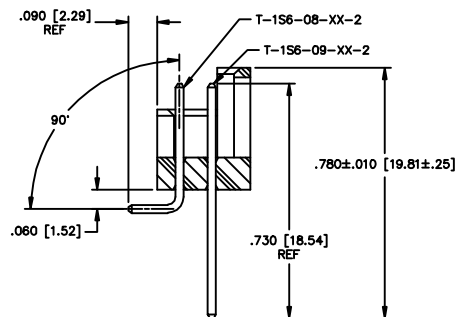

IN-PROCESS 2

TITLE:
.100 x .100 RIGHT ANGLE
TERMINAL STRIP w/
MOLDED IN END SHROUDS

DWG NO:

TSSH-1XX-01-XX-X-RA


SHEET 1 OF 1

TSSH-1XX-01-XX-X-RA

NO. OF POSITIONS PER ROW
-02 THRU -34-RA: RIGHT ANGLE
(USE TSSH-XX-DH-ES-XX-X)LEAD STYLE
-01ROW OPTION
-D: DOUBLE



PLATING SPEC.

- T: MATTE TIN CONTACT AND TAIL
- S: SELECTIVE, 30 Au / 50 NI MIN ON CONTACT, MATTE TIN TAIL
- L: LIGHT SELECTIVE, 10 Au / 50 NI MIN ON CONTACT, MATTE TIN TAIL
- F: FLASH SELECTIVE, 3 Au / 50 NI MIN ON CONTACT, MATTE TIN TAIL
- H: HEAVY GOLD, 30 Au / 50 NI MIN ON CONTACT, 3 Au / 50 NI MIN ON TAIL
- TM: MATTE TIN CONTACT AND TAIL
- FM: FLASH SELECTIVE, 3 Au / 50 NI MIN ON CONTACT, MATTE TIN TAIL
- SM: SELECTIVE, 30 Au / 50 NI MIN ON CONTACT, MATTE TIN TAIL
- LM: LIGHT SELECTIVE, 10 Au / 50 NI MIN ON CONTACT, MATTE TIN TAIL

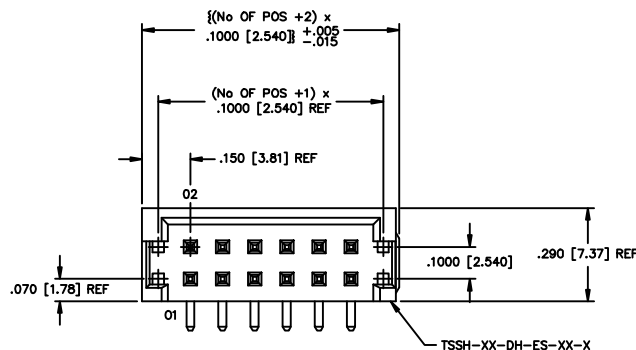


NOTES:

1. Ⓢ REPRESENTS A CRITICAL DIMENSION.
2. MAX FLASH ALLOWED: .010 [2.5].
3. PUSHOUT FORCE: 1.5 LB. MINIMUM.
4. NO BANDOLIER MARKS ARE ALLOWED IN THE POST AREA.
5. INSULATOR MATERIAL: BLACK, LCP, UL 94 V0

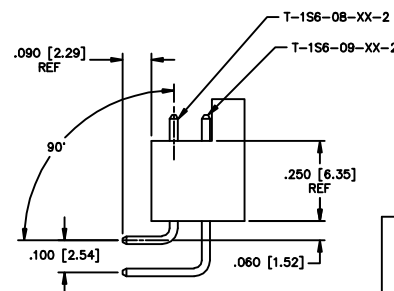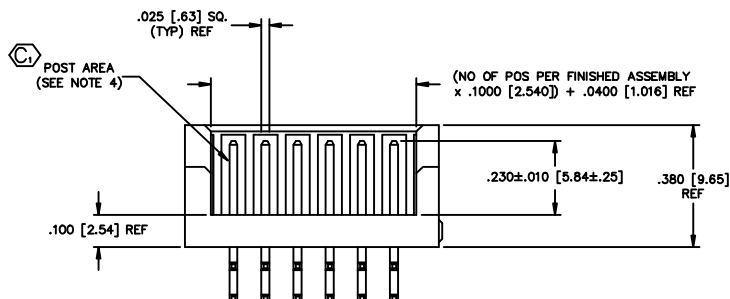

PACKAGING VIEW



PACKAGING TABLE

ROW OPTION	PACKAGING TUBE	PLUG
-RA	PT-1-24-01-40	TP-13

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SANTER INC. AND SHALL NOT BE
REPRODUCED OR TRANSMITTED IN
ANY FORM OR BY ANY MEANS
ELECTRONIC OR MECHANICAL,
INCLUDING PHOTOCOPYING, RECORDING,
OR BY ANY INFORMATION STORAGE
AND RETRIEVAL SYSTEM, WITHOUT THE
WRITTEN CONSENT OF SANTER INC.

santec

DISPROD/ASSEMBLY/100
TSSH/RAJAM

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY:

BRATCHER 1-28-00

TSSH-1XX-01-XX-X-RA
SHEET 1 OF 1