

4

3

2

1

D

D

C




C

B

B

A

A

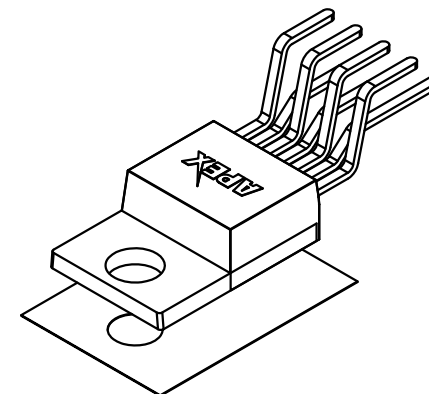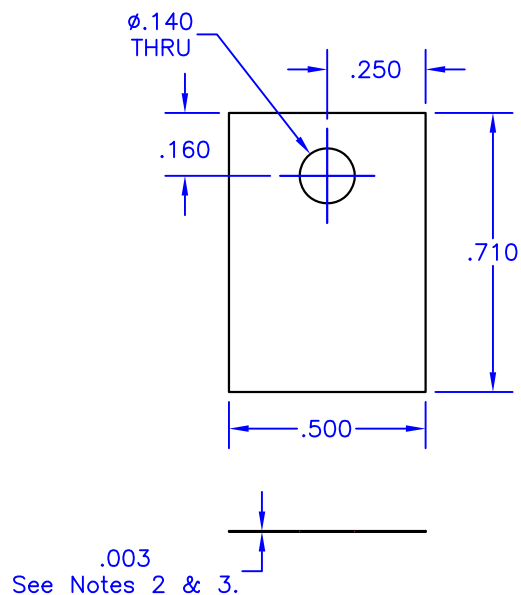

NOTES:

1. Unless otherwise noted, all dimensions are in inches.
2. Film Material: .002 thick Kapton® MT
Dielectric strength – 5200 VAC/mil
3. Interface Material: .0005 thick phase-change thermal compound, both sides.
Maximum shipping & storage temperature – 40°C
Reflow temperature – 60°C
Maximum recommended service temperature – 200°C
4. Thermal impedance: .201 °C/W-in² (1.30 °C/W-cm²) @ 20psi
5. Thermal washers shall be packaged in quantities of 10 with oversize separators between them.
6. Used with TO-220 packages (Apex designators: CD & CX).
7. Power Devices part no. KA-070-050-APX
8. Supplier is to label each plastic box with the Apex part number.

TOLERANCES - UNLESS
OTHERWISE SPECIFIED
.XX = $\pm.05$ [.002]
.XXX = $\pm.005$ [.0002]
ANG. = $\pm 2^\circ$



TITLE: THERMAL WASHER, TO-220

SUBJECT: MECHANICAL DRAWING

ENGINEER: D-M DRAWN BY: P.ECK DCAL: 12438 SHL: 1 OF 1

MODEL: **TW14**
FILENAME: TW14 REV: H DATE: 14NOV12

4

3

2

1