

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

V7-1A17D8-366

CW-B0062

REPLACES X110092-V7

CATALOG LISTING
V7-1A17D8-366
PAGE 1 OF 1

M

ISSUE
2

RELEASE NO. PR-22623

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK



CHECK

CHECK

CHECK

CHECK


CHECK

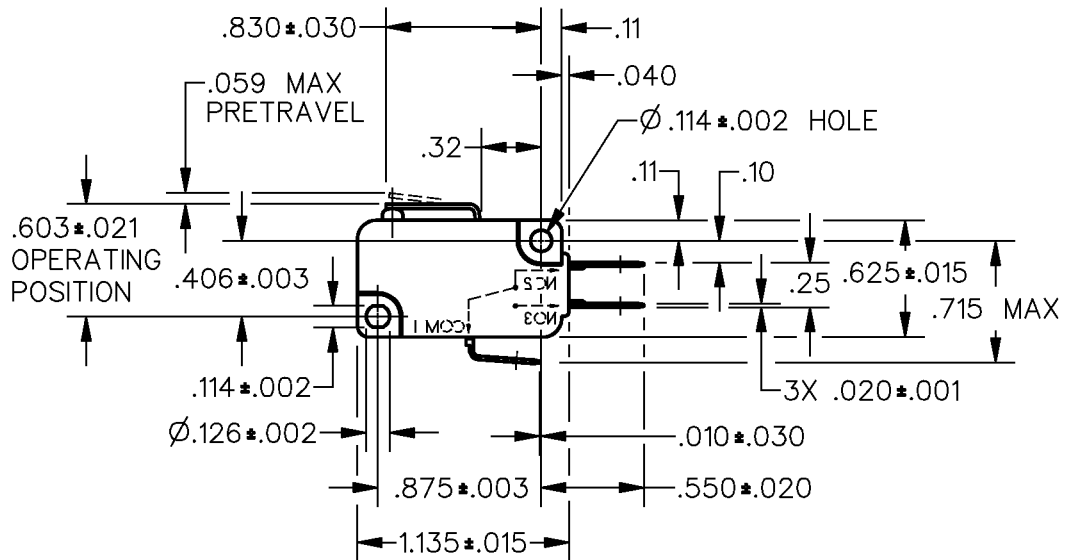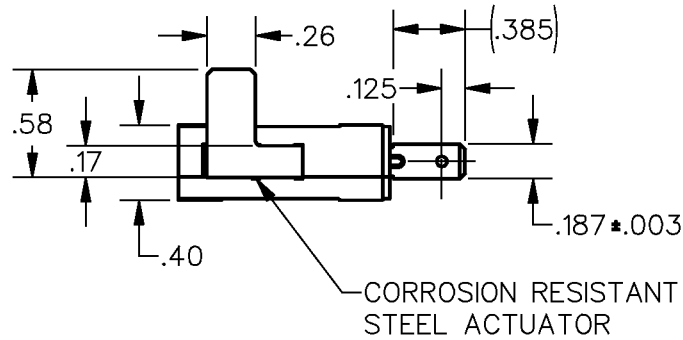

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA		SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE———169 GRAMS MAX	CONTACT ARRANGEMENT S P D T		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE—— —18 GRAMS MIN				
DIFFERENTIAL TRAVEL—— —.013 MAX	L162 5A 125, <u>250</u> , 277 VAC 1/10HP <u>250</u> VAC	ONE PLACE (.0) ±.030		
OVERTRAVEL—— — — —.034 MIN		TWO PLACE (.00) ±.015		
RELEASE TRAVEL—— — — —.008 MIN		THREE PLACE (.000) ±.005		
			ANGLES ±	
			WEIGHT	

DDM/CAD

DRAWN

19 NOV 96

DCS