

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH — BASIC

CATALOG LISTING

V7-2B17D8-384

CW-B3097

CATALOG LISTING
V7-2B17D8-384
PAGE 1 OF 1

REPLACES
RELEASE NO PR-17661

ISSUE
M

4

REVISIONS

A	CO	76214
20	GRT	OCT 93
B	OBS	CO79950
1	DCS	MAY 95
C	REINST	PR21998
11	DCS	JAN 96

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK


CHECK

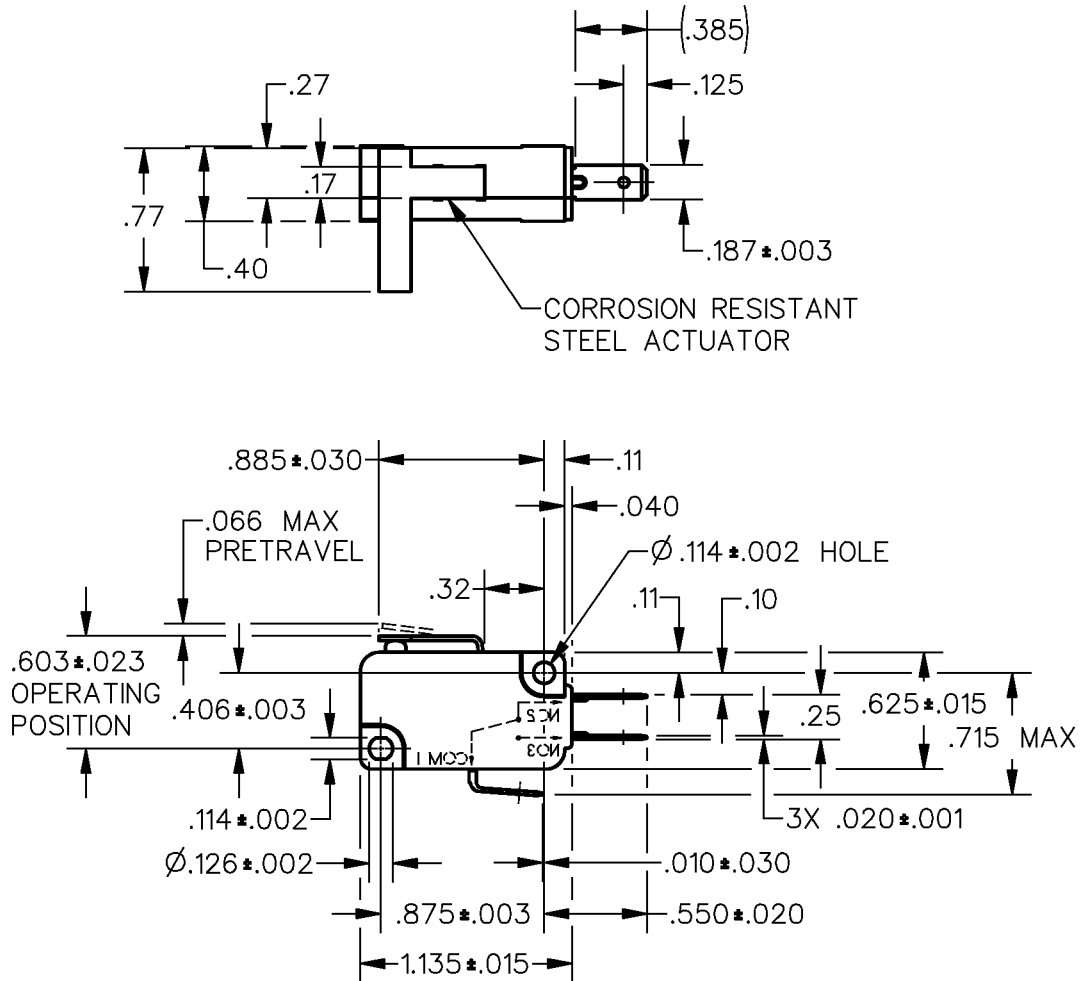

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 76 GRAMS MAX
RELEASE FORCE — — — 6 GRAMS MIN
DIFFERENTIAL TRAVEL — — — .015 MAX
OVERTRAVEL — — — — .038 MIN
RELEASE TRAVEL — — — — .009 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L156 11A 1/3HP 125, 250 OR 277 VAC
1/2A 125 VDC, 1/4A 250 VDC
4A 125 VAC "L"

SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT



DDM/CAD

DRAWN

29 SEP 89

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK